



Southeast Toyota Distributors, LLC Accessory Installation Instructions

2018 4Runner LED Fog Light & DRL 2in1

Year & Model:	2018 4Runner
Part Number:	00016-00081; 00016-00171
Accessory Code:	LD4000; LD4010
PIO / DIO:	PIO / DIO
Business Partner:	J55

Conflicts

Vehicles w/o Factory Fog Lights

General Applicability

Fits Models
1 2018 Models

Additional Items Required For Installation

Item #	Description:
1	N/A

Sequence of Application

Item #	Accessory:
1.	LED Fog light & DRL 2 in 1
2.	TMS Fender Well Modification

SPECIALNOTE: Installation Sequences

After TMS & Safety mandated preparatory steps have been taken, the installation sequence is the suggested method for completing the accessory installation. In some instances the suggested sequence is written for one associate to install & in others the sequence is given as part of a team accessory installation. Unless otherwise stated in the document, the associates may perform the installation steps in any order to make the installation as efficient as possible while maintaining consistent quality.

Recommended Tools

Safety Tools	
Safety Glasses	
Electrical Tape	
Installation Tools	Notes
10mm Wrench	
Phillips Screw Driver	Stubby #2
Pliers	
Torque Wrench	48in-lb 5 ft. lbs.
Side Cutters	
Nylon Tool	
Mirror	
Special Chemicals	
3M Silicon Sealant	
Special Tools	
N/A	

Legend



STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.



OPERATOR SAFETY: Use caution to avoid risk of injury.



CAUTION: A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.



TOOLS & EQUIPMENT: Used in Figures calls out the specific tools and equipment recommended for this process.



REVISION MARK: This mark highlights a change in installation with respect to previous issue.



SAFETY TORQUE: This mark indicates that torque is related to safety.

Table of Contents

I.	Preparation.....	1-5
a.)	Table of Contents.....	2
b.)	Kit/Hardware & Wire Harness Bag Contents.....	3
c.)	Parts for Installation.....	4
d.)	Service & Warranty Information.....	5
II.	Procedures	
a.)	Battery Removal.....	6
b.)	Vehicle Disassembly –Installation Process.....	6-17
III.	Re-install Battery.....	17
IV.	Fog-Light Aiming.....	18
V.	Functions & Quality Check.....	19
VI.	Diagnostic /Block Diagrams & Connectors Procedures.....	20-22
VII.	Warranty Statement.....	23-24

Kit/Hardware Bag Contents:

Item #	Quantity	Description
1.	1	Hood Wire harness
2.	1	Cabin Wire harness
3.	1	Relay
4.	25	Wire ties
5.	1	14" wire tie
6.	2	Black T-Taps

Parts for Installation:

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation. These guidelines can be found in the “Accessory Installation Practices” document.

This document covers such items as:

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, re-checking torque procedure, etc.).
- Vehicle Disassembly/ Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Item #	Quantity	Description
1.	2	Fog + DRL Housings
2.	1	DRL Driver Box
3.	1	DRL Harness Bag
4.	1	DRL User's Card
5.	1	DRL Switch



Warranty & Service Information:


Image Key	Parts information		Warranty Information	
	Part Number	Description	Warranty Time	Labor Op. Code
N/A	00016-00081; 00016-00171	LED Fog Light and DRL 2in1	N/A	N/A
A	00016-00081-01 00016-00171-01	Left Light Assembly	0.7	ALF011 or ALD011
B	00016-00081-02 00016-00171-02	Right Light Assembly	0.7	ALF011 or ALD011
C	00016-32260-04	Fog Light Relay	0.4	ALF031
D	00016-32270-03	LED Wire Harness	1.0	ALD051
E	00016-32270-05	LED Switch	0.3	ALD031
F	00016-32270-06	LED Driver Box	0.5	ALD041

Notes:

- 1) Combo code A is applicable to ALF011 or ALD011 when replacing both sides for additional 0.3 hours labor.
- 2) ALF011 applicable to LED fog light defective condition in 2in1. ALD011 applicable to LED Daytime Running Light condition in 2in1.

Labor times include consideration for diagnosis and Administration time.

If you are a dealer located outside of the Southeast Region, please contact the SET Accessory Warranty Department at (888) 851-2722 or email Accessory.Warranty@SEToyota.com for claim payment instructions.

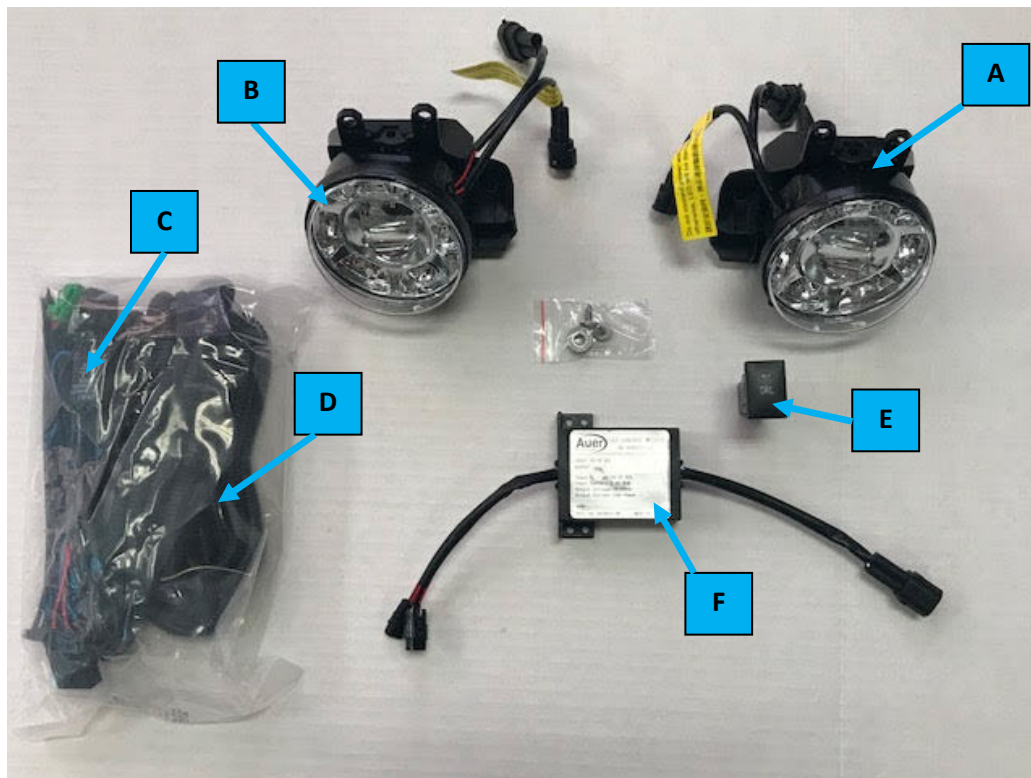Image:

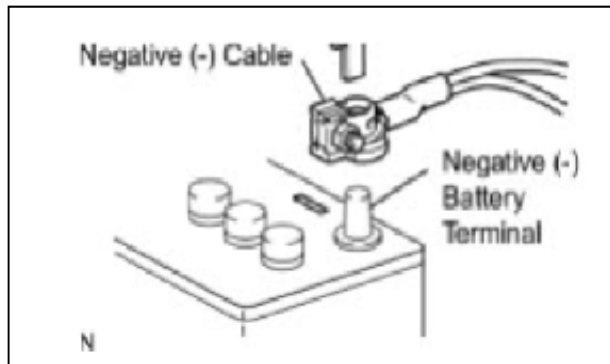


Figure 1



Battery Removal

1. Remove the NEGATIVE (-) battery terminal before starting any disassembly. Do not touch the positive terminal. Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to disable the SRS system. See Figure 1.

Vehicle Disassembly and Installation Process

2. From front of vehicle, lay the DRL's wire harness on the engine compartment, left side from the battery towards the firewall of the car.



Figure 2



3. Locate the large vehicle harness grommet on the left side. If accessible, cut the auxiliary wiring access nipple off the grommet or cut 1/4" slit in grommet and push the red, black, black-white and red-white wires through firewall. Note: Extra caution should be taken not to damage the connector pin. Seal with 3M Silicone sealant. See Figure 2.

4. Using an inspection mirror verify silicone has completely sealed harness/grommet entry point.

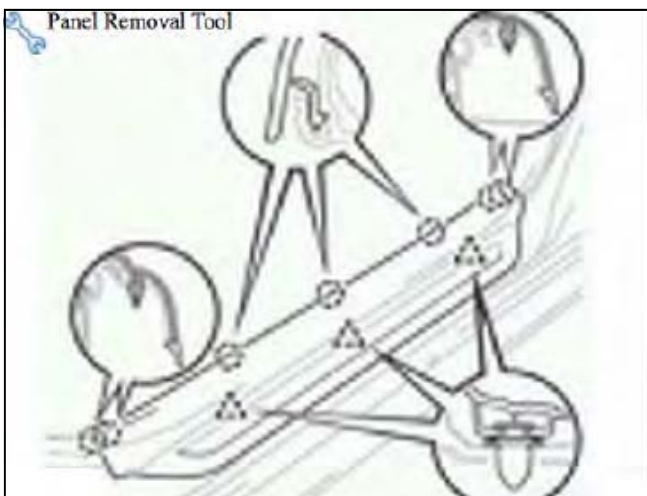


Figure 3

5. Remove driver side door scuff plate: Disengage with panel tool and remove. See Figure 3.

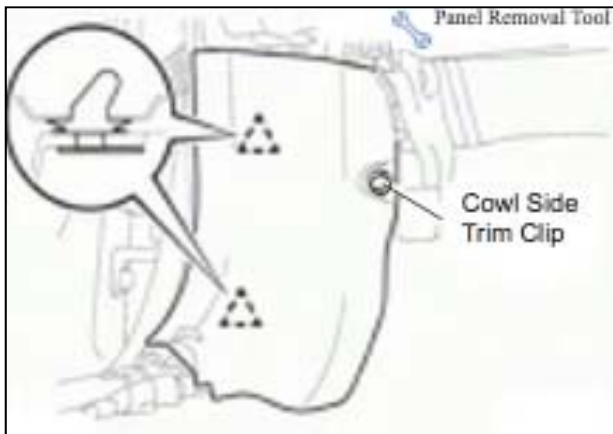


Figure 4

6. Remove the driver side cowl side trim. Unscrew the cowl side trim clip. Disengage (2) clips and remove the cowl side trim. See Figure 4.

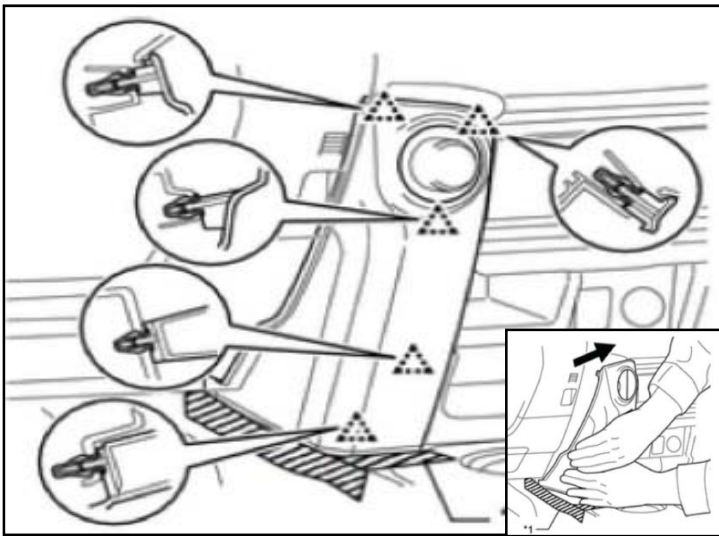


Figure 5

7. Using a pry tool, loosen the instrument cluster finish panel garnish located at the left of the steering wheel. Grip the instrument cluster finish panel garnish and pull it diagonally upward toward the rear to detach the 5 clips. See Figure 5.

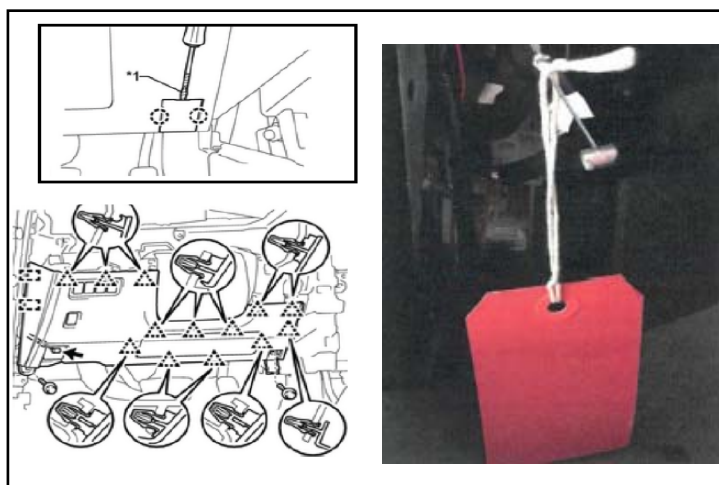


Figure 6

8. Remove the driver's side lower instrument panel finish sub-assembly. Using a screwdriver, detach the 2 claws to open cover. Remove 2 bolts and detach the 13 clips and 2 guides. Then disconnect each connector and hood lock control cable assembly. See Figure 6.

Note: Place Red Tag on instrument panel sub-assembly or hood release cable when removing hood latch cable from the hood latch release lever. See Figure 6. Red Tag required for PIO only. Tag is not part of the kit contents.

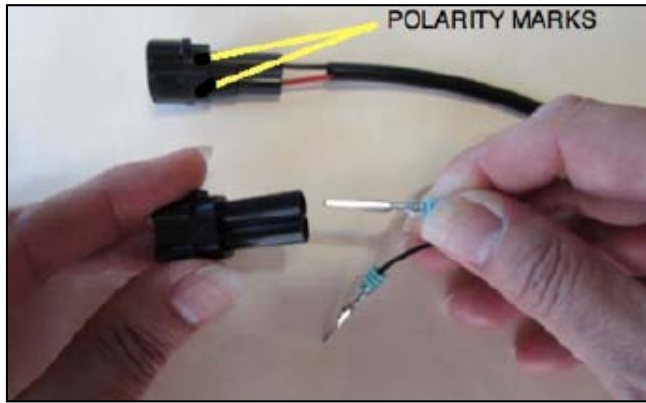


Figure 7

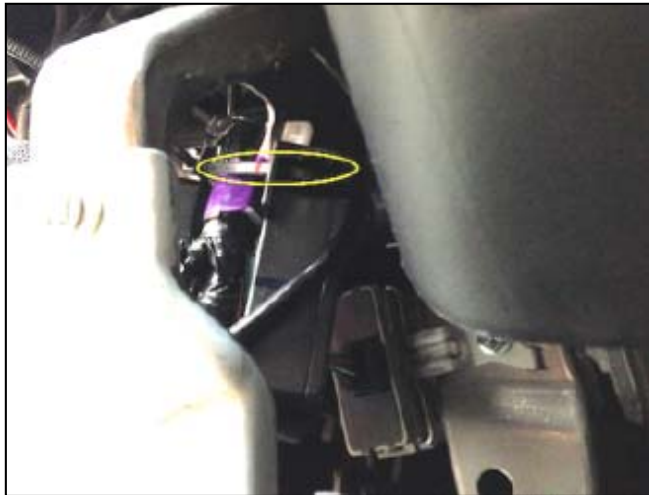


Figure 8

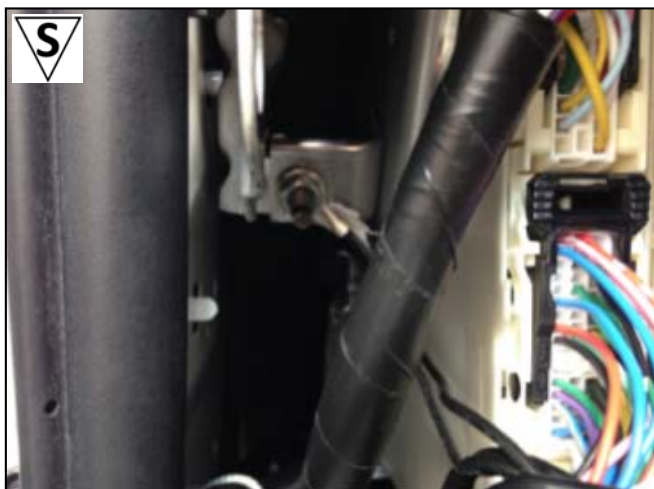


Figure 9

9. Locate the wires that were pulled through the grommet in step 3. Route wire harness towards the left side of steering wheel. Use wire ties as needed.



10. Push the pins of the DRL wire harness into the connector supplied in kit. The connector has a “+” and “-” marks. So connect the red wire into the “+” side and black wire into the “-” side. You may use the driver box as a guide: wire colors must be aligned with the wire colors of the driver box: black with black and red with red, etc. See Figure 7.

11. Connect the driver box to the wire harness.

  **Note: Make sure wire colors are aligned.**

12. Using a 14” wire tie, secure the driver box to factory harness left of the steering wheel column. See Figure 8.

13. Secure the black wire with a ring terminal from DRL harness to ground location behind kick panel. Torque the nut to 5ft. lbs. See Figure 9.

  **Note: Carefully hand start nut and hand tighten. DO NOT use impact gun or power tools.**

 **Torque: 5ft lbs.**

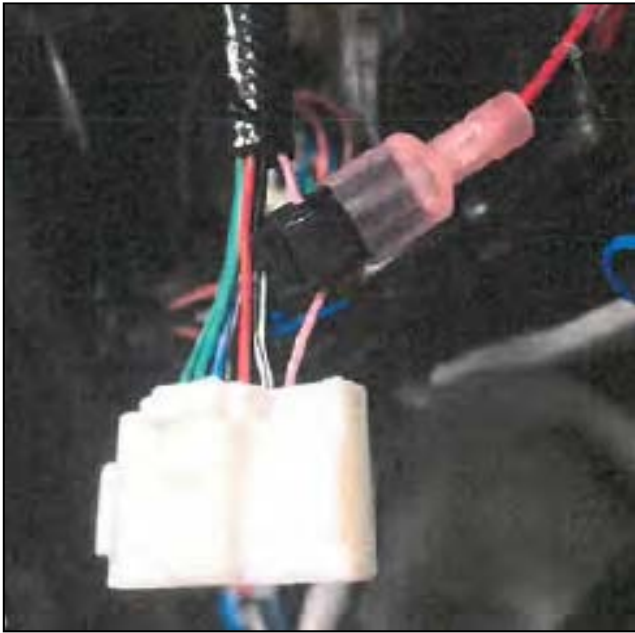


Figure 10A

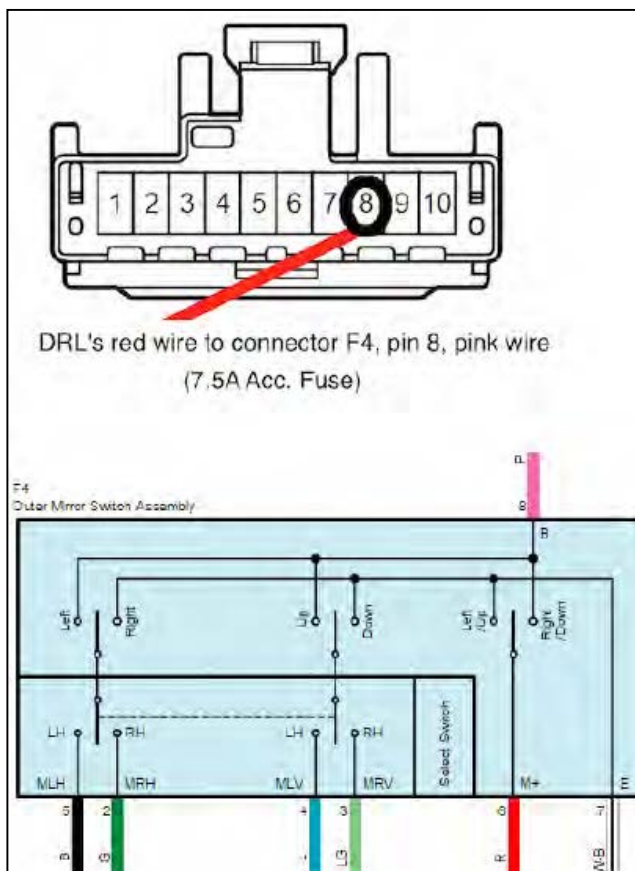


Figure 10B

14. Install a black T-Tap to connector F4 pin 8, pink wire. Then connect the red wire from DRL harness to T-tap. Connector F4 is located at the back of mirror control switch. See Figures 10A and 10B.

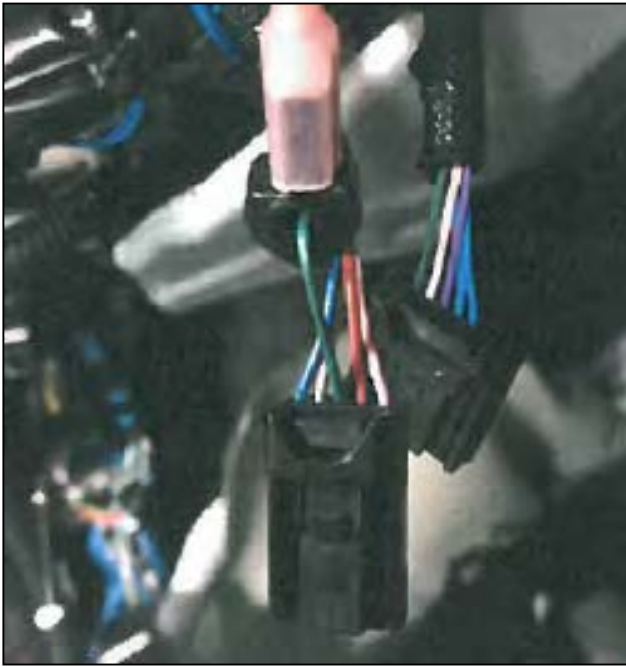


Figure 11A

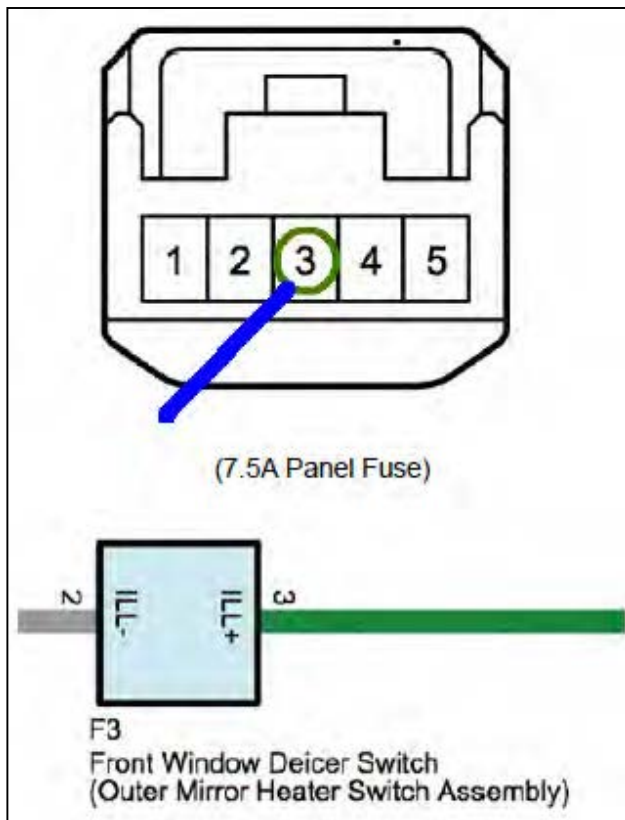


Figure 11B

15. Install a black T-Tap to connector F3, pin 3, green wire. Then connect the blue wire from DRL harness to t-tap. Connector F3 is located at the front window deicer dash switch. See Figures 11A and 11B.



Figure 12

16. Secure any excess wire from t-taps, fuse and relay to main wire harness. Make sure to leave enough lead on the switch green connector. See Figure 12.



Figure 13

17. Route DRL switch connector through switch knockout. Use the switch knockout located at the left of the steering wheel, on the driver lower panel. See Figure 13.

18. Connect the switch wire harness to switch.

19. Reinstall panels and connectors.



Figure 14

20. Remove the radiator grill protector by removing the push pins on top. See Figure 14.



Figure 15A

21. Run DRL wire harness on the left side of vehicle, from the firewall towards the driver side fog lamp area. Then route the passenger side end of the wire harness under hood latch safety. Use wire ties as shown. See Figures 15A, 15B, and 15C.



Figure 15B



Figure 15C



Figure 16

22. Drop the driver side end of the wire harness towards the fog light area, and secure with wire ties. Repeat this step on the passenger side. See Figure 16.

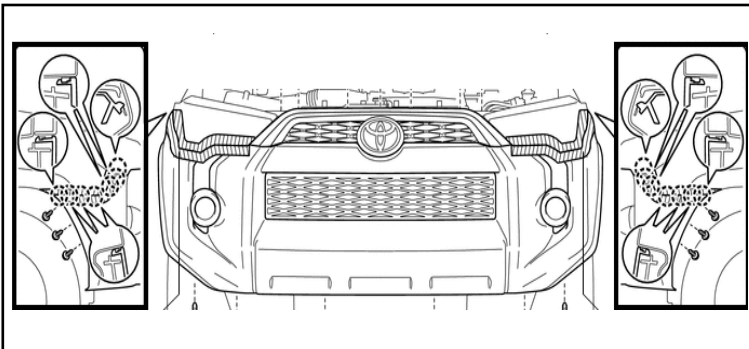


Figure 17

23. Loosen Front Bumper Cover. See Figure 17.

- a. Put protective tape around the front bumper.
- b. Remove the 3 bolts on both the left and right side panels.



Note: DO Not discard these bolts

- c. Disengage the 6 clips on both the left and right side panel.



- d. Gain access to the fog light opening and avoid damage to panel.


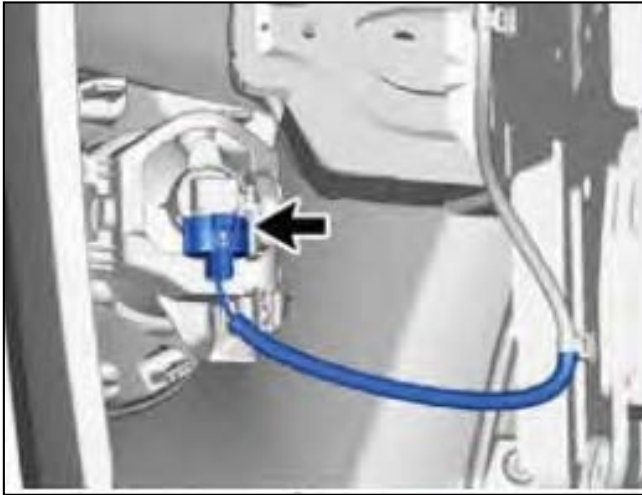


Figure 18

24. Unplug driver side fog lamp. See Figure 18.

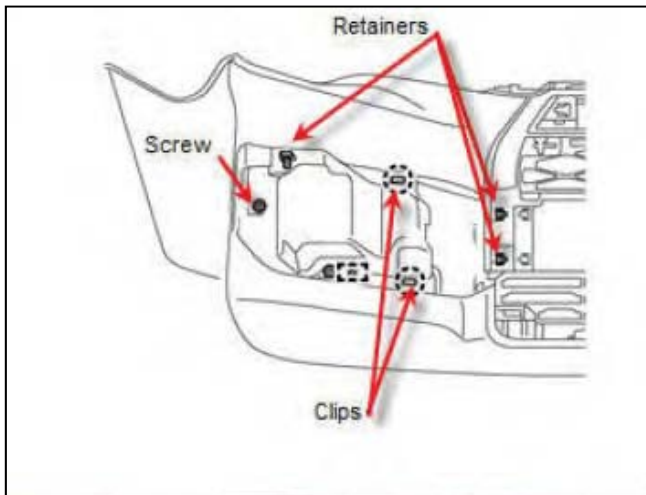

NOTE: Limited models follow steps 25 through 29. Other models jump to step 30.

25. (Limited models): From above or below, remove the front bumper side molding sub-assembly. Remove the 3 white retainer clips. Remove one screw, and detach 2 claws. Optional use of protective tape. See Figure 19.



Figure 19



Figure 20

26. (Limited models): Remove driver side fog lamp from bumper side molding, by 2 factory screws. Note: screws will be used on installation. Do not discard them. See Figure 20.

27. (Limited models): Install 2in1 LH light into bumper side molding.

28. (Limited models): Reinstall bumper side molding into bumper.

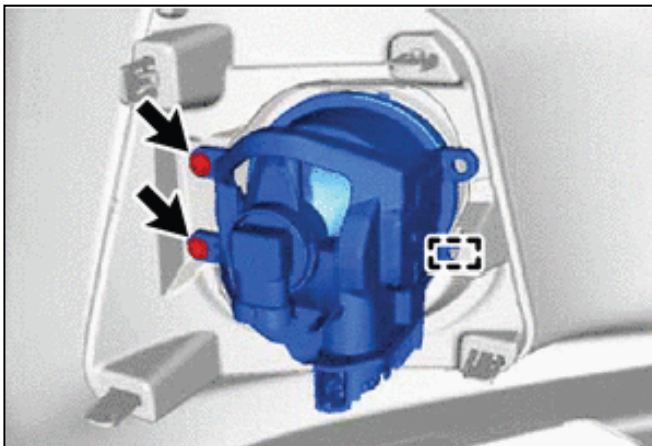


Figure 21

29. (Limited models): Repeat steps 24 through 28 on passenger side.

30. Remove driver side fog lamp, by 2 factory screws. Note: screws will be used on installation. Do not discard them. See Figure 21.

Note: If the fog light connector is pre-installed in the kit, proceed to step 34.



Figure 22

31. The factory fog light harness polarity is shown in Figure 22. Pin 1 is negative. Pin 2 is positive.



Figure 23



Figure 24



Figure 25

32. Push the wires from LED fog light housing into the supplied connector, to match the polarity of the factory wire harness. See Figure 23.

33. Before connecting the LED Fog light, make sure that wires are aligned:- LED Fog light red (+) with factory white (+) - LED Fog Light black (-) with factory white-black (-).

34. Insert one side of the 2in1 light housing in to the plastic sleeve and secure other side with factory screws. See Figure 24.

35. Plug the factory fog light connector into 2in1 fog light terminal and then connect the DRL harness to the 2 in 1 light DRL terminal. See Figure 25.

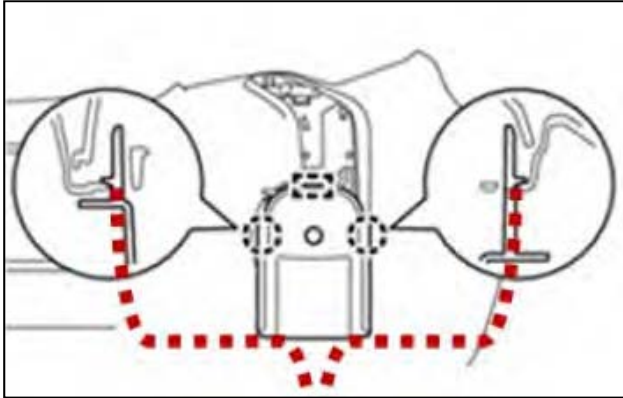


Figure 26

36. Secure excess wire from DRL harness with wire ties.

37. Repeat steps 30 through 37 on the passenger side. Prior to the removal of factory fog light, remove front bumper reinforcement stopper. See Figure 26. This will allow easier access to screws. Detach the 2 claws and guide to remove the reinforcement stopper. Using a pick tool, depress the two clips on the outside panel. Pull down and out gently.

38. Reinstall lower splash shield.

39. REINSTALL ALL TRIM PANELS IN THE ORDER OF REMOVAL TAKING SPECIAL CARE TO MAKE SURE ALL HARNESS AND WIRING ARE PROPERLY SECURED. MAKE SURE HARNESSES ARE NOT PINCHED OR BOUND BY TRIM PIECES.

40. Print Warranty Statement and place in the glove box, DIO only.

Re-install Battery

41. Reconnect negative battery terminal. Torque terminal to 48 in. lbs.



Fog Light Aiming

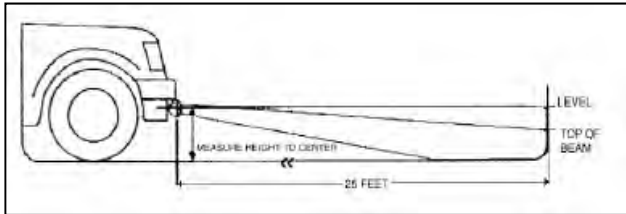


Figure 27A



Figure 27B

42. Traditional fog lights are usually mounted in the front bumper about 10-24 inches from the ground. There are two important issues to address when installing fog lights: the first is to minimize the amount of return glare into the driver's eyes, and the other is to minimize the glare into oncoming eyes. Both of these issues must be accomplished while putting as much light as possible on the road. These fog weather light aiming instructions are suggestions taken from common practice and the S.A.E. standard J583. Some modifications to these instructions may be necessary to minimize glare. Visual aim is made with the top of the beam 4 inches below the lamp center at 25 feet with the lamp facing straight forward. See Figures 27A and 27B.










Use only hand tools to adjust the fog light aiming screw. DO NOT use automatic tools, as they will damage the fog light.



FUNCTION AND QUALITY CHECK

1. DRL will work at full power when ignition switch is ON. DRL will dim out to DOT specifications when lights are ON.
2. If DRL switch position is off, DRL will not work at any time.


ACCESSORY FUNCTION CHECK:**LOOK FOR:**

- | | |
|--|--|
|  DRL function | |
|  Fog Lights function | |
|  All Panels snapped into place | Loose panels and switches. |
|  Fog Lights | Visually confirm lights are straightforward. |
|  Battery Terminal |  Re-torque battery terminals. |
|  Operation Guide | Place DRL operation guide inside glove box. |

VEHICLE FUNCTION CHECK:

- | | |
|---|--|
|  Check functions all switch functions | |
|  Warranty Statement | Place Warranty Statement in the glove box, DIO only. |


Diagnostic /Block Diagrams & Connectors Procedures

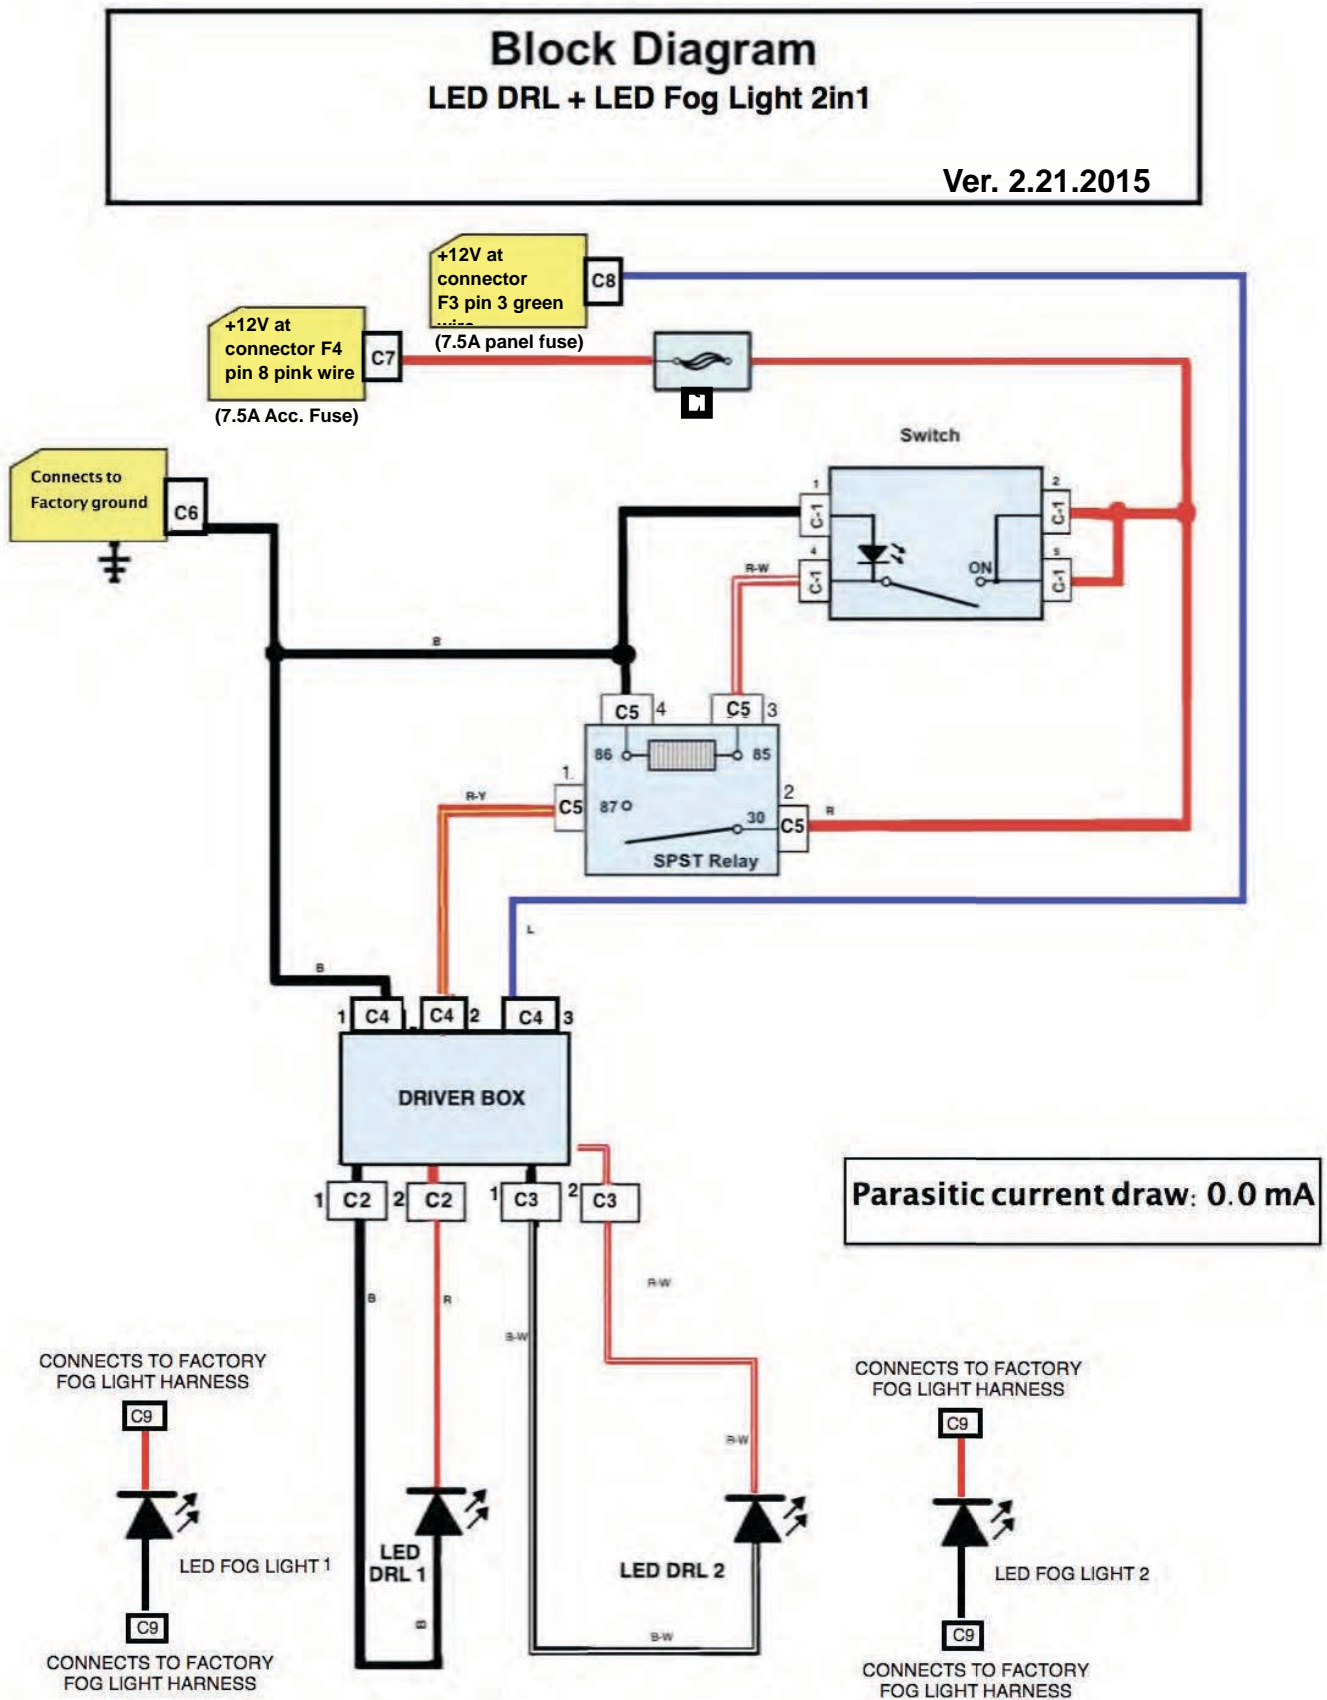

Diagnostic /Block Diagrams & Connectors Procedures

Pinout test

Connector C-1




Pin	Wire Color	Test Reference	Proper Operation
1	Black	Pin 1 to Ground	Approximately 0 VDC
2	Red	Pin 2 to Ground	Approximately 0 VDC ignition switch is OFF +12 VDC when ignition switch is ON
4	Red-White	Pin 4 to Ground	Approximately 0 VDC ignition switch is OFF Approximately 0 VDC ignition switch is ON, DRL switch is OFF +12 VDC when ignition switch is ON and DRL switch is ON
5	Red	Pin 5 to Ground	Approximately 0 VDC ignition switch is OFF +12 VDC when ignition switch is ON

Connector C-2, C-3



Pin	Wire Color	Test Reference	Proper Operation
1	Red or Red-White	Pin 1 to Ground	Aproximately 0 VDC when igntion switch is OFF Aproximately 0 VDC when ignition switch is ON, DRL switch is OFF Aproximately +18 to +24 VDC when ignition switch is ON, DRL switch is ON
2	Black or Black-White	Pin 2 to Ground	Aproximately 0 VDC


Connector C-4



Pin	Wire Color	Test Reference	Proper Operation
1	Black	Pin 1 to Ground	Aproximately 0 VDC
2	Red-Yellow	Pin 2 to Ground	Approximately 0 VDC ignition switch is OFF Approximately 0 VDC ignition switch is ON, DRL switch is OFF +12 VDC when ignition switch is ON and DRL switch is ON
3	Blue	Pin 3 to Ground	Aproximately 0 VDC dash panel lights are OFF +12 VDC when dash panel lights are ON

Diagnostic /Block Diagrams & Connectors Procedures

Connector C-5



FEMALE TERMINAL VIEW

Pin	Wire Color	Test Reference	Proper Operation
1	Red-Yellow	Pin 1 to Ground	Approximately 0 VDC ignition switch is OFF Approximately 0 VDC ignition switch is ON, DRL switch is OFF +12 VDC when ignition switch is ON and DRL switch is ON
2	Red	Pin 2 to Ground	Approximately 0 VDC ignition switch is OFF +12 VDC when ignition switch is ON
3	Red-White	Pin 3 to Ground	Approximately 0 VDC ignition switch is OFF Approximately 0 VDC ignition switch is ON, DRL switch is OFF +12 VDC when ignition switch is ON and DRL switch is ON
4	Black	Pin 3 to Ground	Aproximately 0 VDC

Connector C-6



Pin	Wire Color	Test Reference	Proper Operation
1	Black	Pin 1 to Ground	Aproximately 0 VDC

Connector C-7




Pin	Wire Color	Test Reference	Proper Operation
1	Red	Pin 1 to Ground	Aproximately 0 VDC when ignition switch is OFF +12 VDC when ignition switch is ON

Connector C-8



Pin	Wire Color	Test Reference	Proper Operation
1	Blue	Pin 1 to Ground	Aproximately 0 VDC dash panel lights are OFF +12 VDC when dash panel lights are ON

Connector C-9



Pin	Wire Color	Test Reference	Proper Operation
1	Black	Pin 1 to Ground	Aproximately 0 VDC
2	Red	Pin 2 to Ground	Approximately 12 VDC headlamp switch is ON and FOG Light switch is ON +0 VDC all other times

LIMITED WARRANTY – SOUTHEAST TOYOTA

SOUTHEAST TOYOTA DISTRIBUTORS, LLC ("we," "our" and "us") provides the following limited warranty on our accessories, excluding tires, ("Accessories" or "Accessory") installed on a Toyota. This limited warranty is not provided by and does not bind or provide benefit to the vehicle dealer, the manufacturer, or Toyota Motor Sales, U.S.A., Inc. This limited warranty does not apply to tires; please consult the tire manufacturer and/or its materials accompanying the vehicle for any warranty terms concerning tires. This limited warranty also does not apply to ToyoGuard Exterior Paint Sealant and ToyoGuard Interior Protector; please consult the ToyoGuard Limited Warranty Certificate for the warranty terms concerning those products.

SCOPE OF LIMITED WARRANTY:

A. Protection:

- i. **Accessories Installed by Southeast Toyota Distributors, LLC on a new Toyota vehicle.** We warrant that, for a period of 36 months or 36,000 miles, whichever occurs first, we will repair or replace (includes labor), free of charge, any defect in such an Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. The warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator. Accessories installed by Southeast Toyota Distributors, LLC are identified on the vehicle's window sticker (Monroney Label).
- ii. **Accessories Installed by a Toyota Dealer on a Toyota vehicle.** We warrant that, for 12 months, regardless of mileage, from the date such an Accessory was installed on the vehicle or the remainder of the Toyota new vehicle warranty, whichever is longer, we will repair or replace (includes labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. For a new vehicle, the warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator.
- iii. **Accessories purchased from a Toyota Dealer but not installed by the Toyota Dealer.** We warrant that, for a period of 12 months, regardless of mileage, from the date the accessory was purchased, we will repair or replace (does not include labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory.

B. Limitation of Warranty. This limited warranty does not apply to, and we will not repair, replace, or reimburse you for: (1) wheel balancing and wheel alignments, except for one wheel balancing or alignment during the first 12 months or 12,000 miles, whichever occurs first, from the vehicle's In-Service Date, as defined above, (2) abrasions or dents, whatever their cause, and any failure or damage resulting directly or indirectly from accidents, collisions, impacts from foreign objects, fire, theft, larceny, explosion, malicious mischief, vandalism, civil commotion, riots, war, or any other similar causes, (3) any failure or damage resulting directly or indirectly from lightning, windstorms, hail, water, floods, subfreezing temperatures, airborne chemicals, tree sap, dust, salt, and any other environmental conditions or similar causes, (4) any failure or damage caused by: (a) a failure of any part, other than the Accessory, (b) any misuse, abuse, improper towing, negligence or lack of maintenance of the vehicle or Accessory, (c) the alteration, modification or repair of the Accessory by anyone other than persons expressly authorized by us to perform such alteration, modification or repair, or (d) the use of the vehicle for commercial purposes, competitive driving or racing, (5) any failure or damage, if the Accessory has not been installed according to instructions, (6) any failure or damage occurring outside of Canada, the United States of America, its territories or possessions, (7) except to the extent required by the state whose laws govern this limited warranty, any consequential, secondary, or unreasonable costs that may be suffered as a result of the need to repair or replace the Accessory, including without limitation any loss of use of the vehicle, road service, towing, storage charges, inconvenience, loss of wages and/or income, additional expense incurred, loss of transportation, rental car expense, or any derivative damage to persons or things other than the Accessory, including other parts of the vehicle, or (8) liability for damage to property or for injury to or death of any person, arising out of the operation, maintenance or use of your vehicle whether or not related to the covered Accessory.

C. Exclusive Remedy. If there is a valid claim under this limited warranty for a defect due to faulty material or workmanship in the Accessory, we will, at our option, either: (i) repair, (ii) replace or (iii) provide a full refund of the purchase price of the Accessory. We have no other obligations under this limited warranty. Refunds will be made to the vehicle owner. If the vehicle is leased, the refund will be made to the leasing company.

HOW TO MAKE A CLAIM: In the event of a warranty claim, please contact the nearest Toyota dealer to arrange for repairs. The dealership must receive our prior authorization before making repairs covered by this limited warranty. The dealer will contact Southeast Toyota Distributors, LLC at 1-888-851-2722, select option #5 (Warranty Department), then option #4 (Repairs), for instructions on processing a warranty claim, if they are not already familiar with the process. If you have any questions or concerns regarding repairs covered by this limited warranty, please contact our **Customer Assistance Hotline at 1-800-301-6859**.

OUR DISPUTE RESOLUTION PROGRAM: Your satisfaction is our highest priority. In keeping with that focus, in the event that an issue arises related to this Limited Warranty, we invite you to call our Customer Assistance Hotline at 1-800-301-6859 to discuss it. In most cases, we expect that a satisfactory resolution of your issue can be reached through engagement with that Department. If our Customer Loyalty Department is unable to resolve your issue to your satisfaction, we offer a dispute resolution program administered by the National Center for Dispute Settlement (NCDS) ("the Program"). The purpose of the Program is to resolve disputes in an informal setting before an impartial arbitrator. The Program is free of charge to you (although you must bear the cost of any expert witness or attorney you elect to employ). You are required to complete the Program before exercising rights or seeking remedies under the federal Magnuson-Moss Warranty Act, 15 U.S.C. § 2301 et seq. ("the Act"). If you choose to seek remedies that are not created by the Act, you are not required to use the Program before pursuing such remedies – although the Program is still available to you to resolve the dispute. When utilizing the Program, you will need to provide (a) the vehicle identification number of your vehicle, (b) the identity of your selling and servicing dealerships, (c) the mileage on your vehicle at relevant times, (d) the date and nature of any relevant repairs, (e) legible copies of repair orders and other relevant documents, (f) a summary of the unresolved issue and the requested action, and (g) your contact information. In most cases, the dispute resolution process under the Program will be completed within forty (40) days of your submission of your request and will consist of steps such as an initial eligibility determination, an opportunity for you and us to submit information in writing relating to your claim, an oral hearing, and a decision from the arbitrator. A decision will be binding on you only if you choose to accept it. You may submit a request to NCDS by telephone at their toll free number: (877)-276-8848 or in writing at P.O. Box 463196, Mt. Clemens, MI 48046. You may obtain additional information regarding the Program at www.ncdsusa.org. In the event that the NCDS does not exist or no longer handles disputes for us at the time that you seek to submit a request, you may contact our **Customer Assistance Hotline at 1-800-301-6859** to obtain current information about our dispute resolution programs.

GENERAL LIMITATION OF WARRANTY: THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES OR LIABILITIES. IN NO EVENT SHALL WE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSIONS OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE INFORMATION OR EXCLUSION MAY NOT APPLY. NO EXPRESS WARRANTY OF FITNESS OR MERCHANTABILITY IS GRANTED BY THIS LIMITED WARRANTY. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THOSE DESCRIBED IN THIS DOCUMENT. ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH MAY BE APPLICABLE BY OPERATION OF LAW SHALL BE LIMITED TO THE PERIOD OF THIS WRITTEN LIMITED WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY. THIS LIMITED WARRANTY PROVIDES SPECIFIC LEGAL RIGHTS, AND THERE MAY BE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, MUST BE BROUGHT WITHIN A PERIOD NOT EXCEEDING 12 MONTHS AFTER EXPIRATION OF THIS LIMITED WARRANTY. THE REMEDIES SPECIFIED HEREIN AND THOSE SPECIFIED BY APPLICABLE LAW ARE THE ONLY REMEDIES AVAILABLE. WE ASSUME NO OTHER OBLIGATION OR RESPONSIBILITY WITH REGARD TO THE ACCESSORY. WE NEITHER ASSUME, NOR AUTHORIZE ANYONE TO ASSUME FOR US, ANY ADDITIONAL LIABILITY IN CONNECTION HERewith.

GENERAL: This limited warranty describes the complete and exclusive rights that result from the purchase of Accessories. No oral representations or statements may be relied upon. This limited warranty may not be amended or modified, and additional rights may not be granted, unless in a written statement signed by one of our officers. This limited warranty shall be governed by the laws of the state where the vehicle is purchased, excluding laws concerning conflicts of law. We may delegate the performance of our duties and obligations and assign our rights and benefits hereunder. For inquiries regarding this limited warranty, we can be contacted directly at **Customer Assistance Hotline at 1-800-301-6859**, or by mail to: **Southeast Toyota Distributors, LLC, Attention: Customer Loyalty Department, 100 Jim Moran Boulevard, Deerfield Beach, Florida 33442.**