



Southeast Toyota Distributors, LLC Accessory Installation Instructions

2018 Corolla Frameless EC Mirror w/ Compass and HomeLink

Year & Model:	2018 Corolla
Part Number:	00016-05464
Accessory Code:	ME4000
PIO / DIO:	PIO / DIO
Business Partner:	J79

Conflicts

Vehicles with factory HomeLink

General Applicability

Fits Models
1 2018 Models

Additional Items Required For Installation

Item#	Description:
1.	A-Pillar Clip (62217-24020)

Sequence of Application

Item#	Accessory:
1.	N/A

SPECIAL NOTE: Installation Sequences

After TMS & Safety mandated preparatory steps have been taken, the installation sequence is the suggested method for completing the accessory installation. In some instances the suggested sequence is written for one associate to install & in others the sequence is given as part of a team accessory installation. Unless otherwise stated in the document, the associates may perform the installation steps in any order to make the installation as efficient as possible while maintaining consistent quality.

Recommended Tools

Safety Tools	
Safety Glasses	
Installation Tools	Notes
Needle Nose Pliers	
Screw Gun	
T20 Torx Bit/Driver	
#2 Phillips Bit	
Nylon Tool	
Dark Towel/ Cloth	
10mm Socket/Wrench	
Ratchet/Driver	
Torque Wrench	48 in-lb and 15.5 in-lb
Special Chemicals	
N/A	
Special Tools	
N/A	
Safety Tools	

Legend

	STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.
	OPERATOR SAFETY: Use caution to avoid risk of injury.
	CAUTION: A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.
	TOOLS & EQUIPMENT: Used in Figures calls out the specific tools and equipment recommended for this process.
	REVISION MARK: This mark highlights a change in installation with respect to previous issue.
	SAFETY TORQUE: This mark indicates that torque is related to safety.

Table of Contents

I.	Preparation.....	1-5
a.)	Table of Contents.....	2
b.)	Kit/Hardware & Wire Harness Bag Contents.....	3
c.)	Parts for Installation.....	4
d.)	Service & Warranty Information.....	5
II.	Procedures	
a.)	Battery Removal.....	6
b.)	Vehicle Disassembly –Installation Process.....	7-19
III.	Re-install Battery.....	19
IV.	Compass Zone Setting.....	20
V.	Calibrate Compass.....	20
VI.	Function and Quality Check.....	21
VII.	Diagnostic /Block Diagrams & Connectors Procedures.....	22-24
VIII.	Warranty Statement.....	25-26

Kit/Hardware Bag Contents:

Item #	Quantity	Description
1.	3	Red T-Taps
2.	10	Wire Ties
3.	6	Foam Tapes
4.	1	Quick Reference Guide


Parts for Installation:

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation. These guidelines can be found in the “Accessory Installation Practices” document.

This document covers such items as:

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, re-checking torque procedure, etc.).
- Vehicle Disassembly/ Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Item #	Quantity	Description
1.	1	Frameless Mirror w/ Compass& HomeLink
2.	1	Wire Harness Cover
3.	1	Main Power Harness

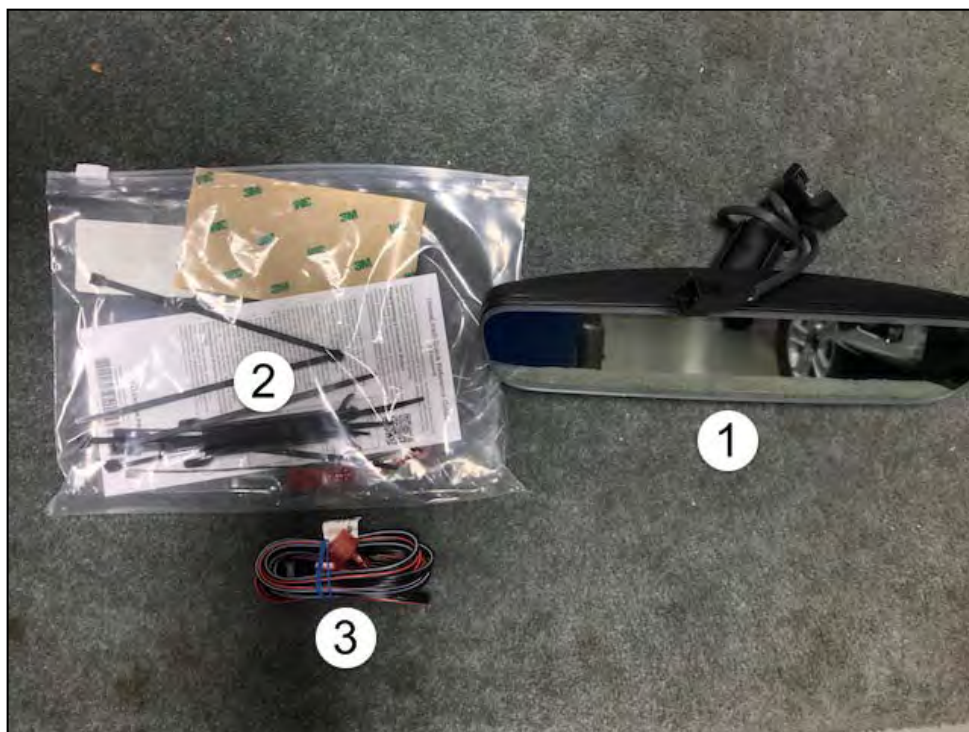


Service & Warranty Information:


Image Key	Parts information		Warranty Information	
	Part Number	Description	Warranty Time	Labor Op. Code
A	00016-05464	EC Mirror w/ Comp. and HL	0.5	AHM001
B	00016-35463-04	Mirror Wire Cover	0.1	AHM002

If you are a dealer located outside of the Southeast Region, please contact the SET Accessory Warranty Department at (888) 851-2722 or email Accessory.Warranty@SETToyota.com for claim payment instructions.

Image:

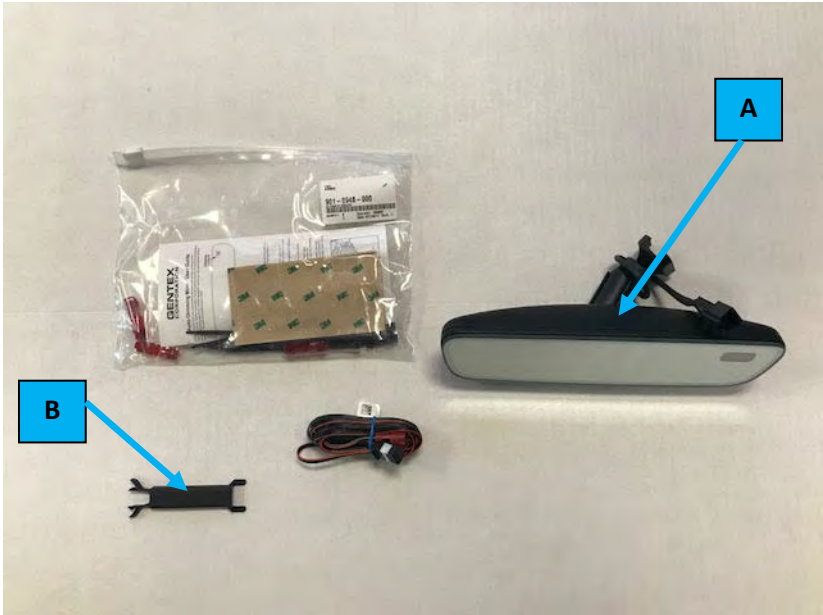

Battery Preparation

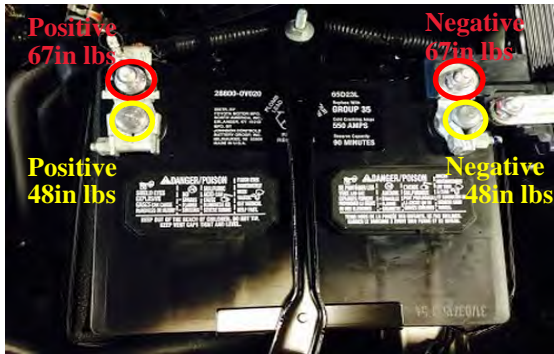

NOTE: It is recommended to use Option 1 when a lead wire is not being installed. However Option 2 is to be used when a lead wire is being added to the positive side, or anytime the negative side 12mm nut is being removed, re-torque both to 67in lbs.

NOTE: If removal of the positive battery terminal 12mm nut is required to install a lead wire, the negative battery terminal must be disconnected first to disable the electrical system. The positive battery or terminal should never be disconnected unless the negative battery terminal is first removed & waiting 90 seconds for the SRS system to power down.

Option 1: If the battery clamp nut cannot be accessed to set torque to the recommended specification without removing additional panels & /or other components. You may change (reverse the direction) the negative battery clamp bolt & nut. Battery terminal must have torque set to factory specification . **CAUTION:** Do not touch the positive terminal. Re-torque to 48in lbs.

Option 2: Removing the 12mm nut from the positive or negative terminal junction. When re-tightening the torque specification is 67in lbs.

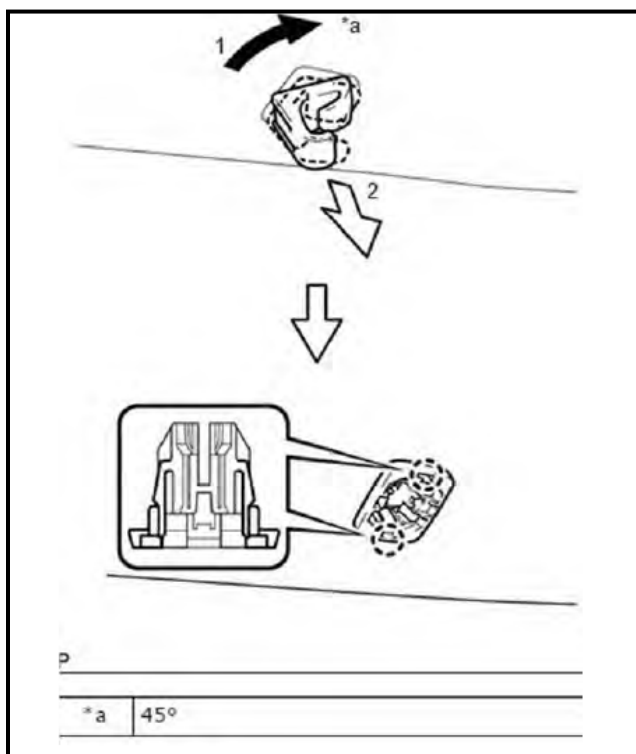


Figure 1

Vehicle Preparation and Installation

1. Remove the driver side visor holders.
Turn the holder clockwise approximately 45° and pull it as shown in the illustration. Detach the 2 claws and remove the visor holder. See Figure 1.

2. Remove map light assembly.
 - a. **Sunroof Models:** Using a molding remover, disengage the 4 clips. Disconnect the connector. See figure 2.
 - b. **Non-Sunroof Models:** Using a molding remover, disengage the 4 claws. Disconnect the connector. See figure 2.

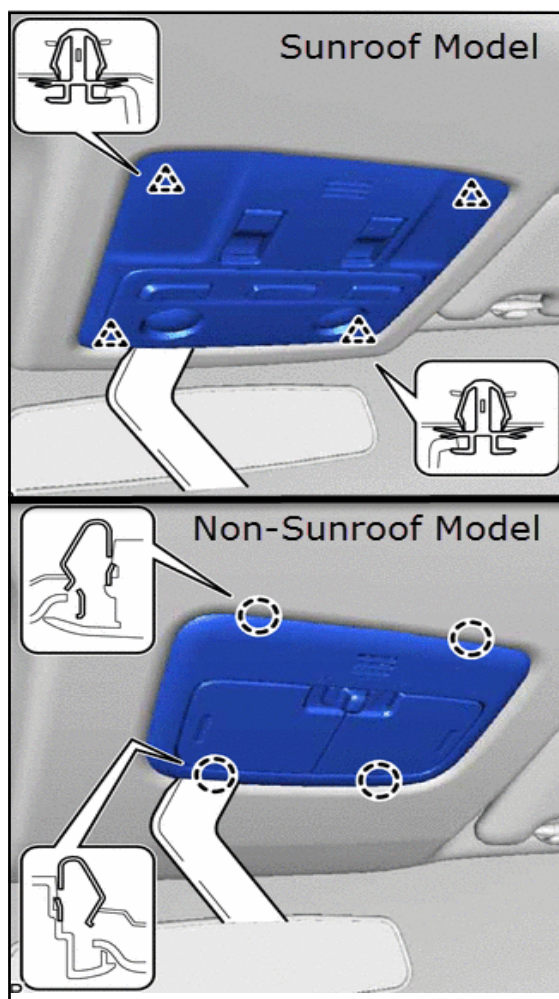


Figure 2

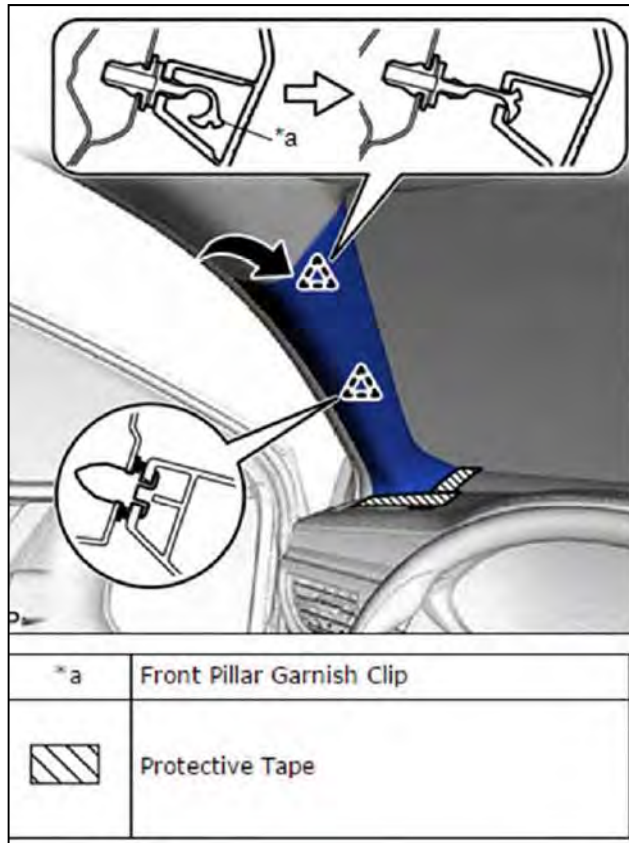


Figure 3

3. Apply protective tape around the front pillar garnish assembly LH. Pull the upper part of the front pillar garnish assembly LH toward the inside of the cabin and disengage the front pillar garnish assembly LH from the base of the 2 clips. See figure 3.

HINT: Let the front LH pillar garnish hang from the 2 front pillar garnish clips.

4. Using needle-nose pliers with the tips wrapped with protective tape, rotate the front pillar garnish clip 90° in the direction indicated by the arrow (1) shown in the illustration. Pull the front A-Pillar garnish assembly LH in the direction indicated by the arrow (2) shown in the illustration to disengage it from the front A-Pillar garnish clip. Pull the front A-Pillar garnish assembly LH in the direction indicated by the arrow (3) shown in the illustration to disengage the 3 guides to remove the front A-Pillar garnish assembly LH. Remove the upper A-Pillar garnish clip. **The clip CAN NOT be reused. DESTROY and DISPOSE of clip.** See figure 4.

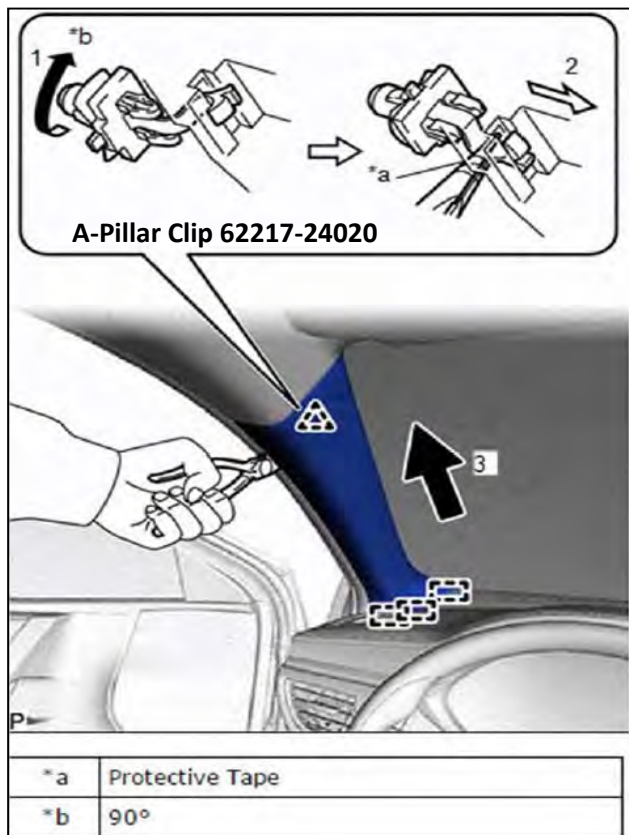


Figure 4



NOTE: Install a new A-Pillar garnish clip when replacing A-Pillar garnish at the end of installation. A-Pillar clip 62217-24020 is not provided in the mirror kit. This item must be ordered separately.



NOTICE: Do not apply excessive force using a tool.

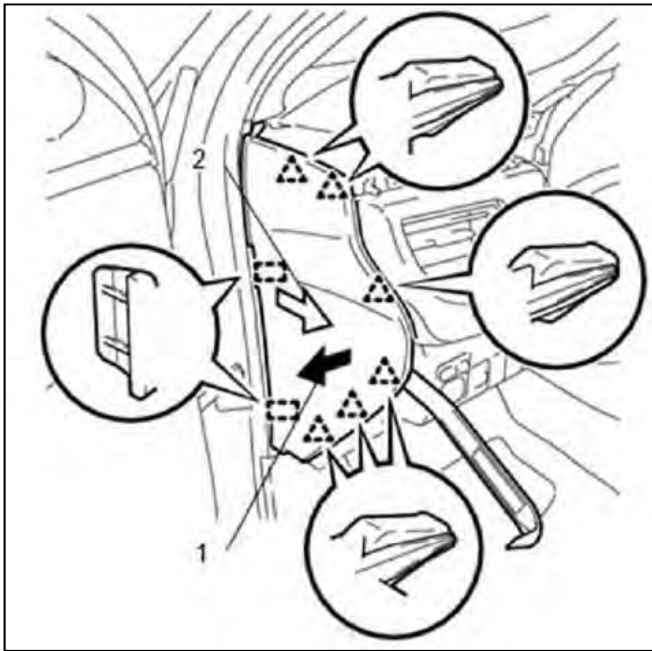


Figure 5

5. Using a molding remover, disengage the 6 clips in the direction indicated by the arrow (1) as shown in the illustration. Pull the instrument side panel LH in the direction indicated by the arrow (2) as shown in the illustration to disengage the 2 guides and remove the instrument side panel LH. See figure 5.

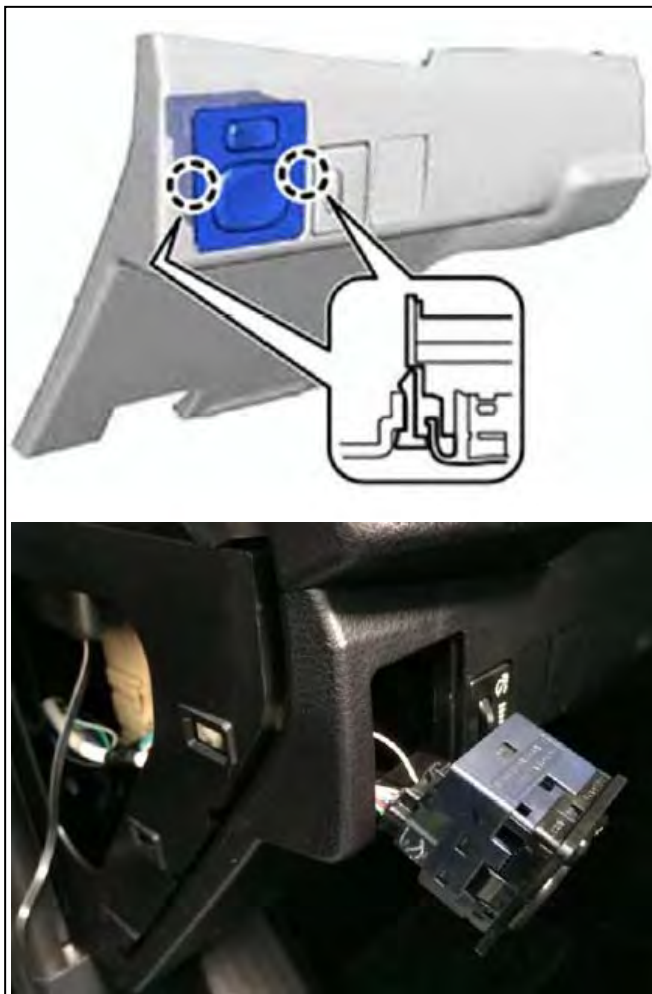


Figure 6

6. Disengage the 2 claws and remove the outer mirror switch assembly. See figure 6.

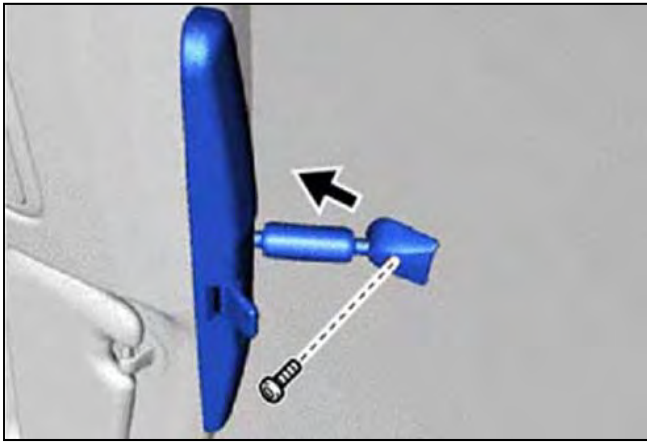


Figure 7a

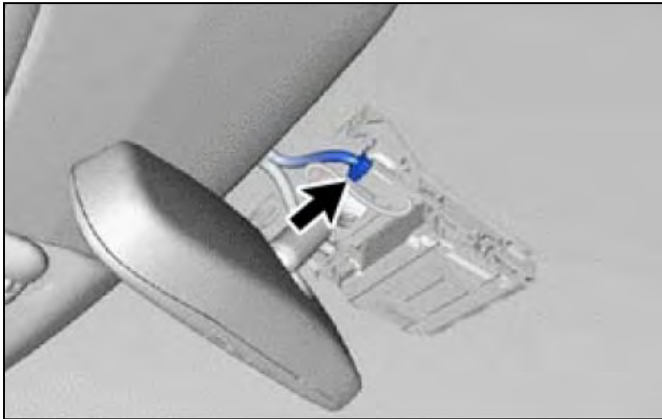


Figure 7b

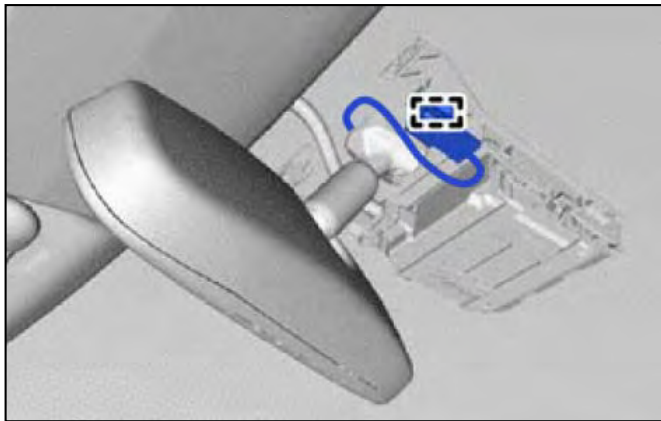


Figure 7c



Figure 7d

7. Using a T20 "TORX" socket wrench, remove the screw and inner rear view mirror assembly as shown in the illustration. See figure 7a.

Replacing EC mirror with Frameless EC Mirror w/ Compass & HomeLink.

- a. Disconnect the connector. Disengage the clamp. See figure 7b and figure 7c.
- b. Remove the factory EC mirror cover. Disconnect the connector. Using a T20 "TORX" bit, remove the screw and inner rear view mirror assembly. See figure 7d.

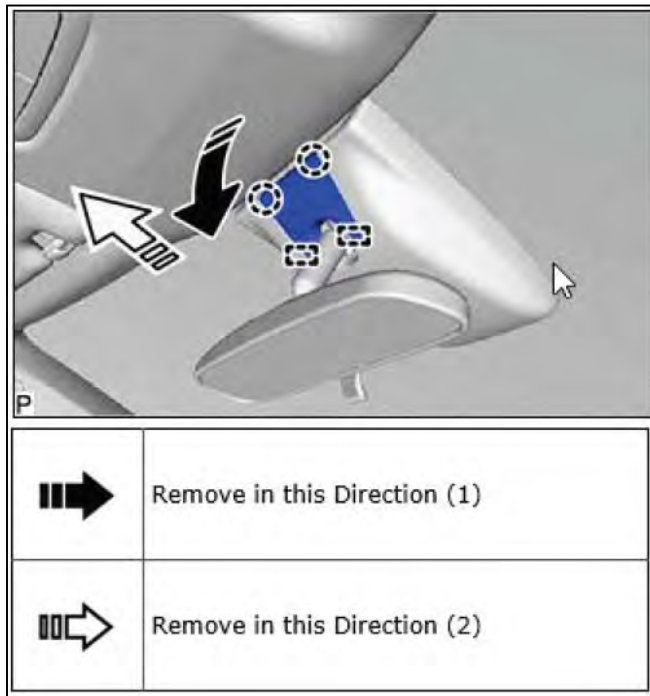


Figure 8a

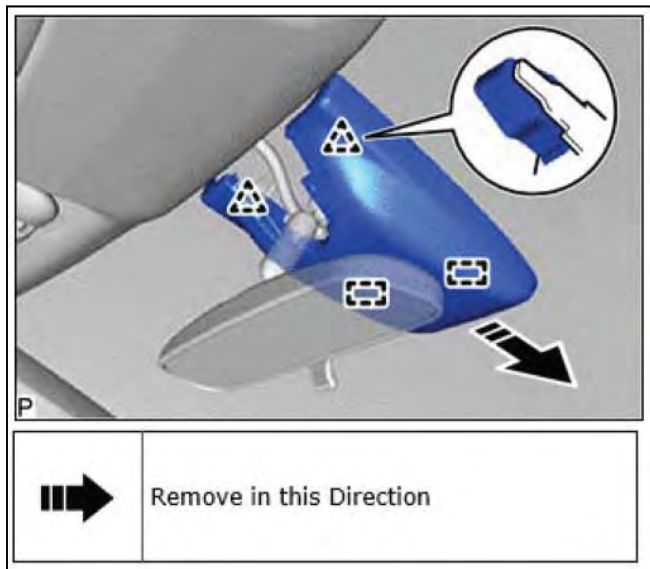


Figure 8b

8. Vehicles equipped with Safety Sense (Lane Departure) System Only- Cover Removal.

- a. Pull the No. 2 forward recognition cover in the direction indicated by the arrow (1) in the illustration to disengage the 2 claws. Pull the No. 2 forward recognition cover in the direction indicated by the arrow (2) in the illustration to disengage the 2 guides and remove the No. 2 forward recognition cover. See figure 8a.

NOTICE: If these claws are disengaged separately, they may break. Insert a molding remover between them and pull it down to disengage the claws simultaneously.

- b. Disengage the 2 clips and 2 guides to remove the No. 1 forward recognition cover as shown in the illustration. See figure 8b.

NOTICE: To avoid damaging the guides, always slide the No. 1 forward recognition cover parallel to the windshield glass.



Figure 9

9. Mount the Frameless® EC Mirror w/Compass in reverse of original factory mirror removal. Slide and attach the rearview mirror assembly and tighten mirror set screw with a T20 torx bit or driver. DO NOT over tighten screw. See figure 9.



Torque: 15.5 in.*lbf



Do not use power tools to tighten screw. Hands tighten only.

Note: Remove fingerprints, smudges, dirt, and etc. from mirror and windshield with glass cleaner.

10. Route the mirror harness to overhead console opening using the precut notches on the front of the headliner. See figure 10.



Figure 10

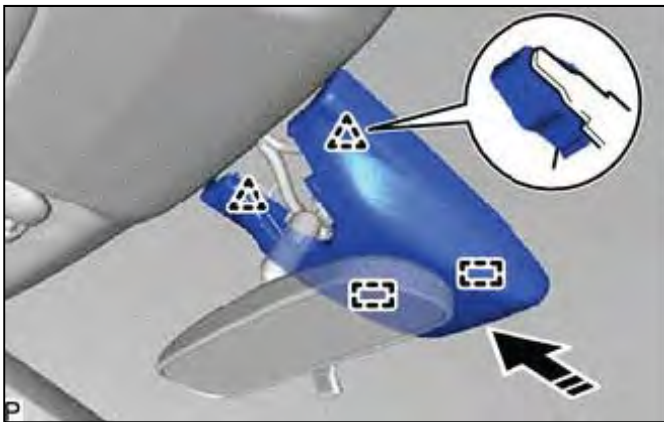


Figure 11a

11. Vehicles Equipped with Safety Sense (Lane Departure) System- Cover Installation

- Engage the 2 clips and 2 guides as shown in the illustration to install the No. 1 forward recognition cover. See figure 11a.
- Engage the 2 guides and 2 claws as indicated by the arrows, in the order shown in the illustration to install the No. 2 forward recognition cover. See figure 11b.



Figure 11b

Note: Vehicles with Lane departure System (Safety Sense) will not require the mirror wire harness cover.

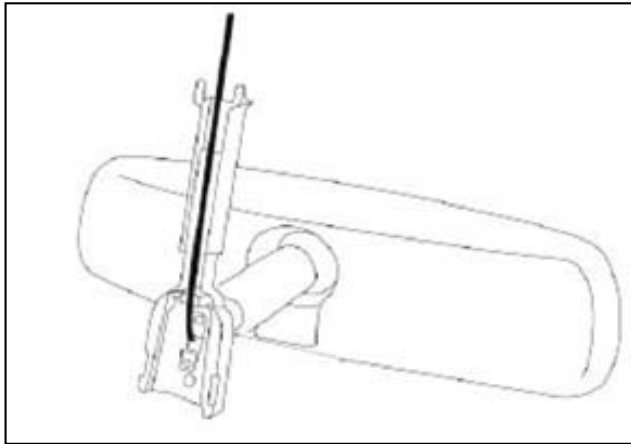


Figure 12

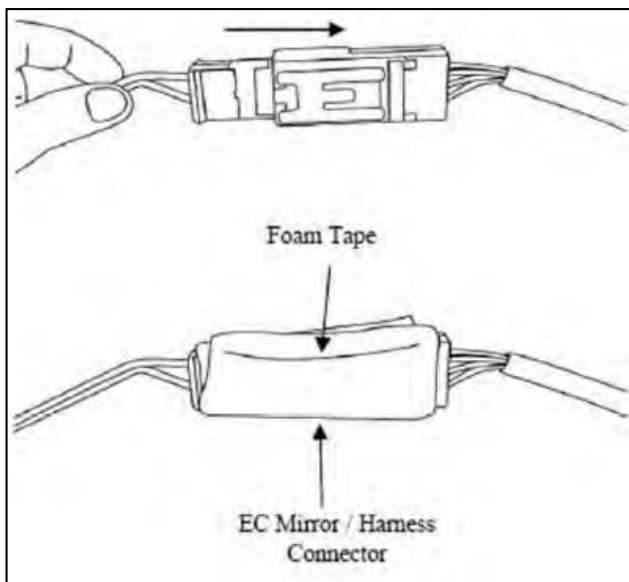


Figure 13

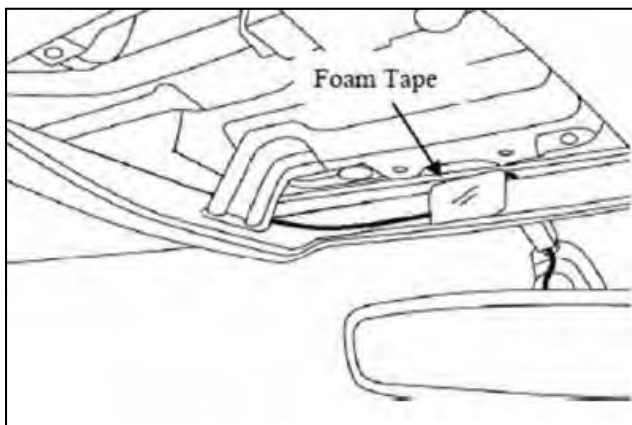


Figure 14

12. Vehicles without Safety Sense (Lane Departure) System-Mirror Wire harness cover installation.

- a. Install the wire harness cover over the wire harness. Seat the bottom of the cover securely to base of the mirror. Extend the top of the cover fully into headliner. See figure 12.

13. Connect the mirror harness to the mirror main power harness. Make sure both connectors are fully engaged. Wrap foam tape around connectors. See figure 13.

14. Secure the harness to the front center of the headliner with one (1) piece of foam tape. See figure 14.

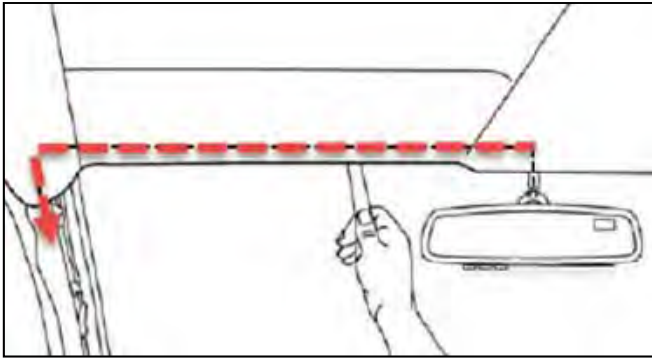


Figure 15

15. Route mirror main power harness along front edge of headliner towards the LH vehicle A-Pillar. See figure 15.



Figure 16

16. Route the mirror harness down to the bottom of the Front LH pillar. Route the harness through the factory harness clips attached to the vehicle. Wire tie the harness to the vehicle harness as shown. See figure 16.



Figure 17

17. Route the mirror harness down to the outer mirror remote switch. Follow the factory harness. See figure 17.

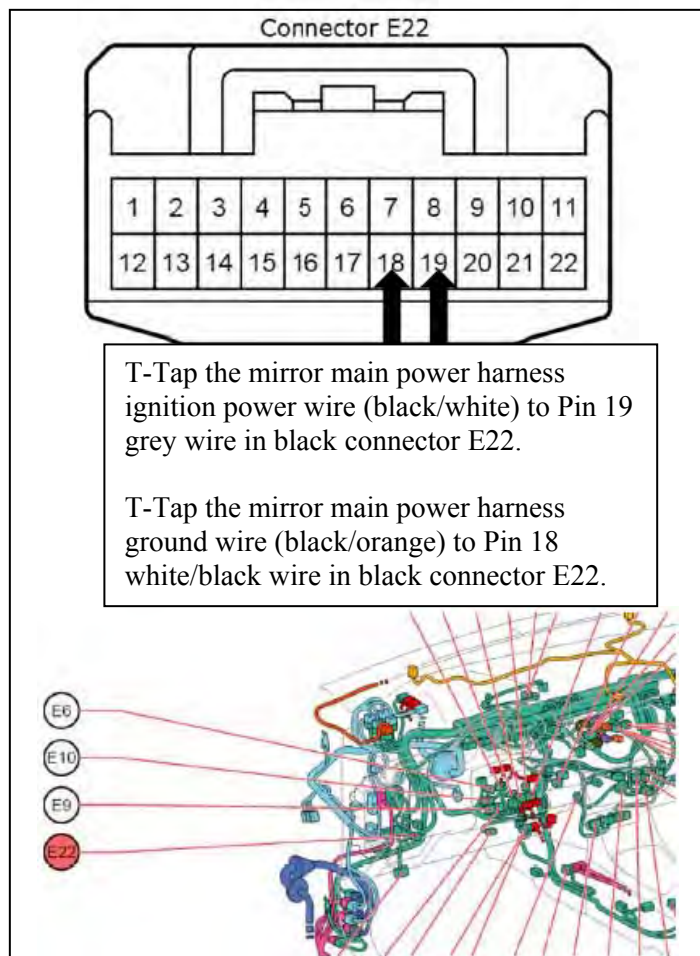


Figure 18a

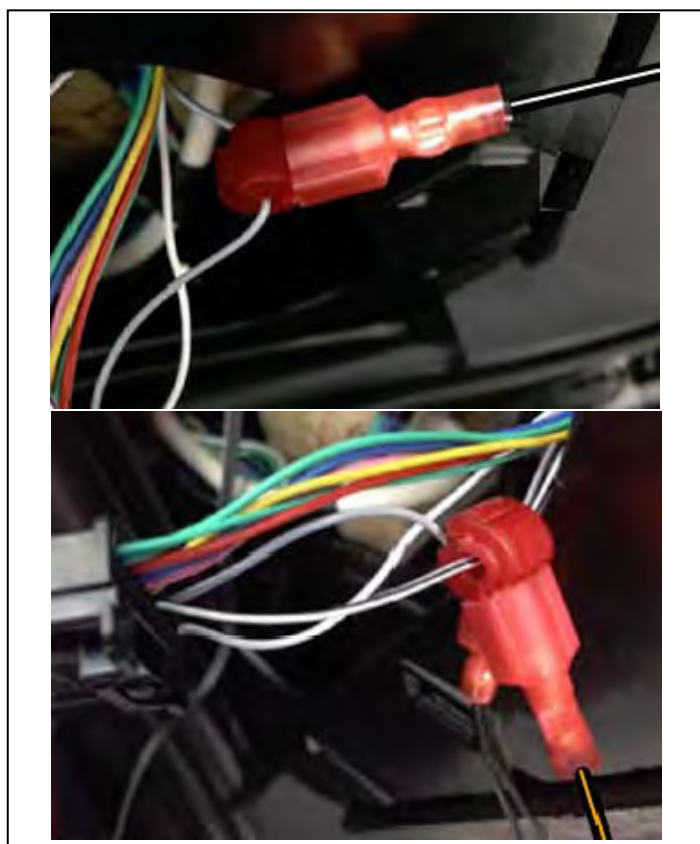


Figure 18b

18. Locate vehicle connector E22 outer remote mirror switch. Disconnect connector. T-Tap the mirror main power harness ignition power wire (black/white) to Pin 19 grey wire in black connector E22. T-Tap the mirror main power harness ground wire (black/orange) to Pin 18 white/black wire in black connector E22. See figure 18a and figure 18b.



Figure 19

19. T-Tap the mirror main power harness power wire (black) to the mirror main power harness ignition wire (black/white). See figure 19.

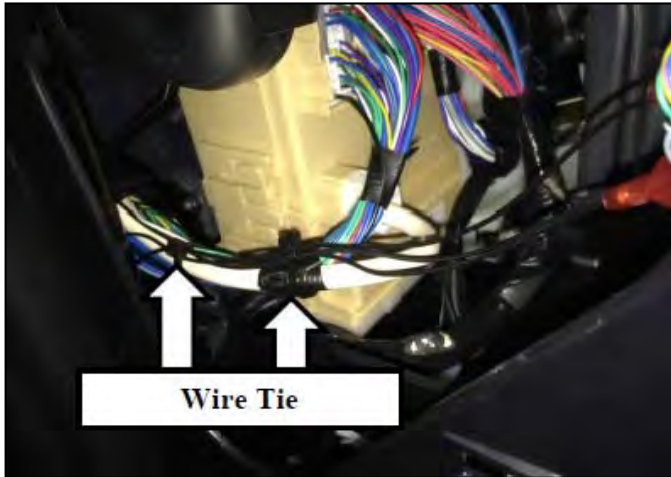


Figure 20

20. Bundle up any excess wire. Using wire ties, secure the mirror main power harness wires to the vehicle harness as shown in figure 20.

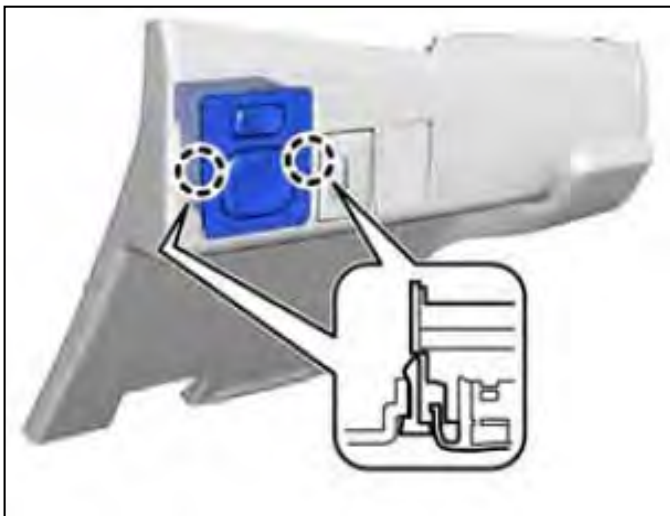


Figure 21

21. Engage the 2 claws and install the outer mirror switch assembly. See figure 21.

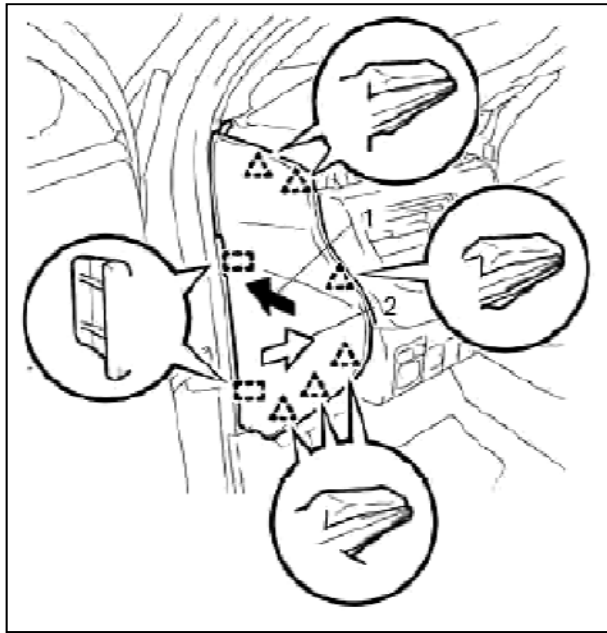


Figure 22

22. Push the instrument side panel LH in the direction indicated by the arrow (1) as shown in the illustration to engage the 2 guides and push it in the direction indicated by the arrow (2) as shown in the illustration to engage the 6 clips to install the instrument side panel LH. See figure 22.

23. Install the New A-Pillar garnish clip to vehicle A-Pillar.



NOTE: Install a new A-Pillar garnish clip when installing garnish. DO NOT reuse the old clip. THE CLIP MUST BE REPLACED.

A-Pillar clip 62217-24020 is not provided in the mirror kit. This item must be ordered separately.

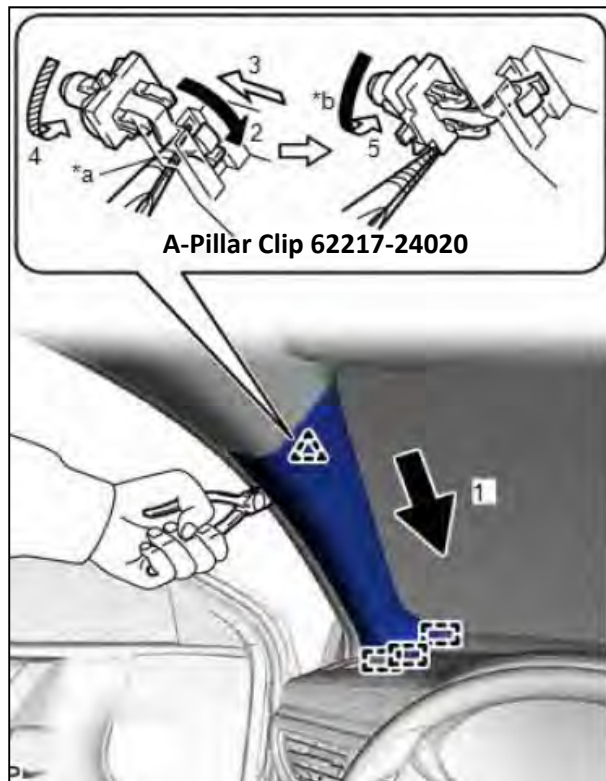


Figure 23

- a. Push the front A-Pillar garnish assembly LH in the direction indicated by the arrow (1) shown in the illustration to engage the 3 guides. Using needle-nose pliers with the tips wrapped with protective tape, bend the end of the front A-Pillar garnish clip in the direction indicated by the arrow (2) shown in the illustration. Push the front A-Pillar garnish assembly LH in the direction indicated by the arrow (3) shown in the illustration and insert it to the front A-Pillar garnish clip. Using needle-nose pliers with the tips wrapped with protective tape, rotate the front pillar garnish clip in the direction indicated by the arrow (4) shown in the illustration. Using needle-nose pliers with the tips wrapped with protective tape, push the front A-Pillar garnish clip in the direction indicated by the arrow (5) and rotate it to the position shown in the illustration. See figure 23.

HINT: Rotate the front A-Pillar garnish clip so that the longer end of the clip is positioned at the bottom. Make sure that the front A-Pillar garnish clip is positioned as shown in the illustration. Failing to do so may cause a gap between the front A-Pillar garnish assembly LH and roof headlining assembly.

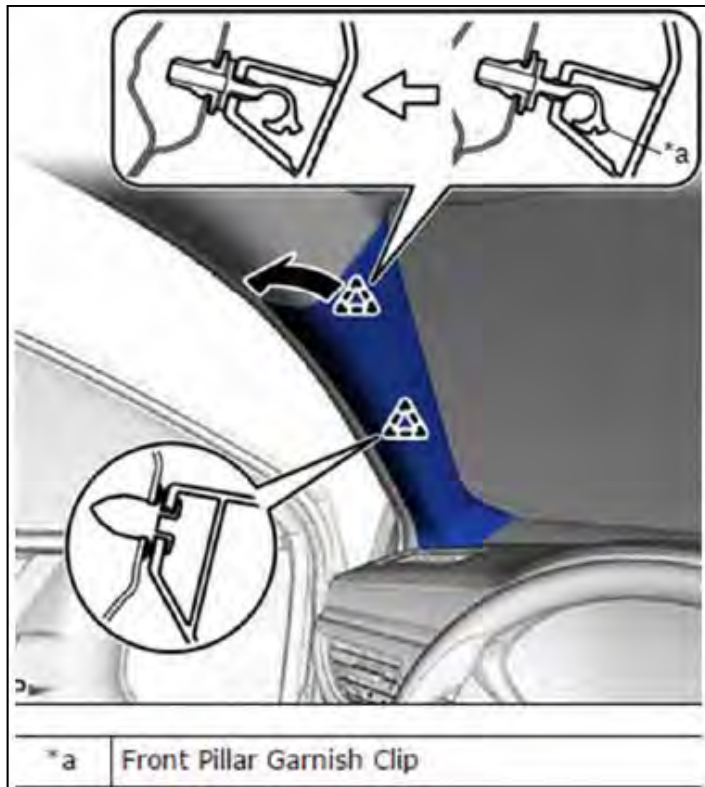


Figure 24

24. Engage the clip and front pillar garnish clip to install the front pillar garnish assembly LH. See figure 24.

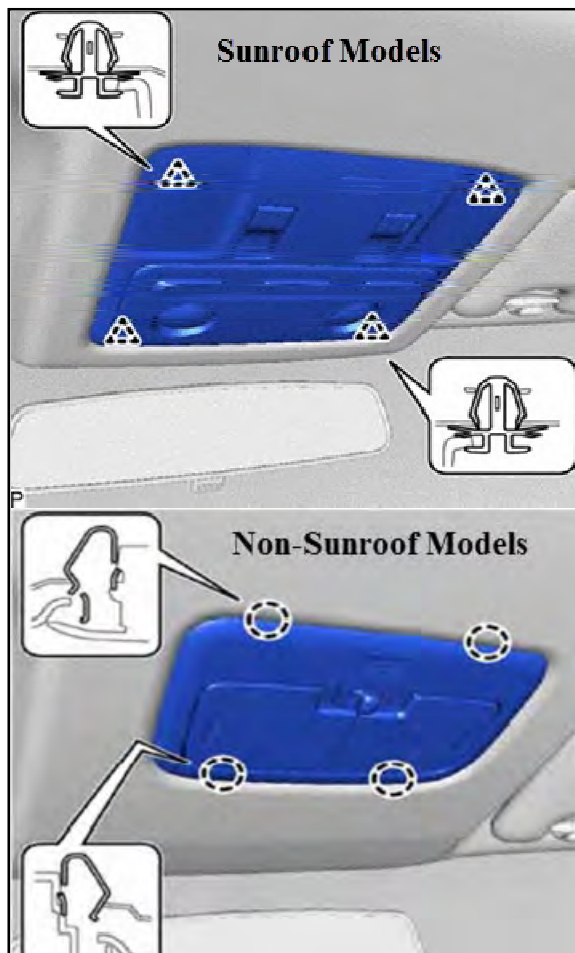


Figure 25

25. Install map light assembly. Sunroof Models: Connect the connector. Engage the 4 clips. See figure 25. Non-Sunroof models: Connect the connector. Engage the 4 claws. See figure 25.

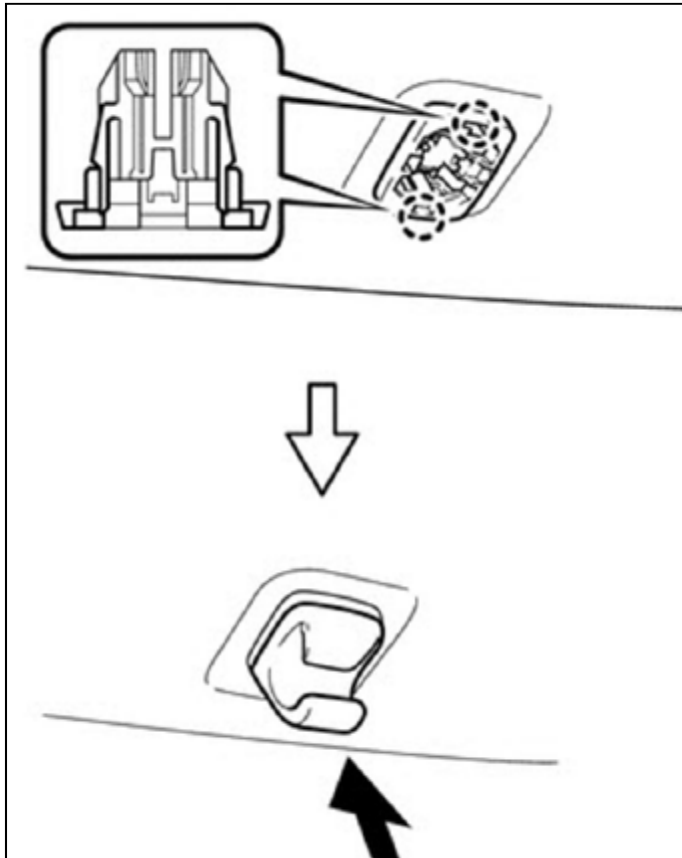


Figure 26

26. Engage the 2 claws. Push in the visor holder as shown in the illustration. See figure 26.

27. Place owner's cards in the glove box. See figure 27.

28. Print Warranty Statement and place in glove box, DIO only.

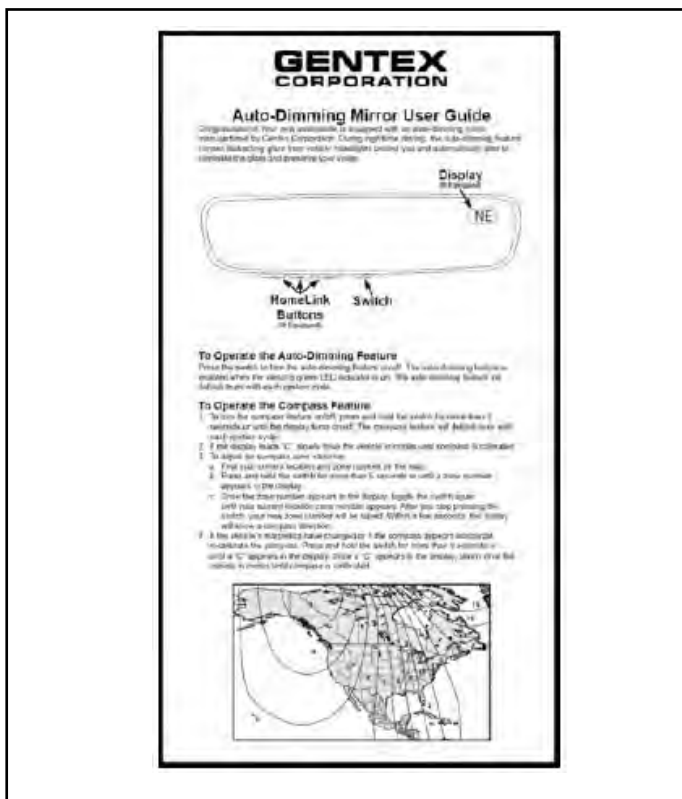


Figure 27

29. REINSTALL ALL TRIM PANELS IN THE ORDER OF REMOVAL TAKING SPECIAL CARE TOMAKE SURE ALL HARNESSES AND WIRING ARE PROPERLY SECURED. MAKE SURE HARNESSES ARE NOT PINCHED OR BOUND BY TRIM PIECES.

30. Reconnect negative battery cable and torque.



**If option1 was used: 10mm nut 48 IN/LBS.
If option2 was used: 12mm nut 67 IN/LBS.**

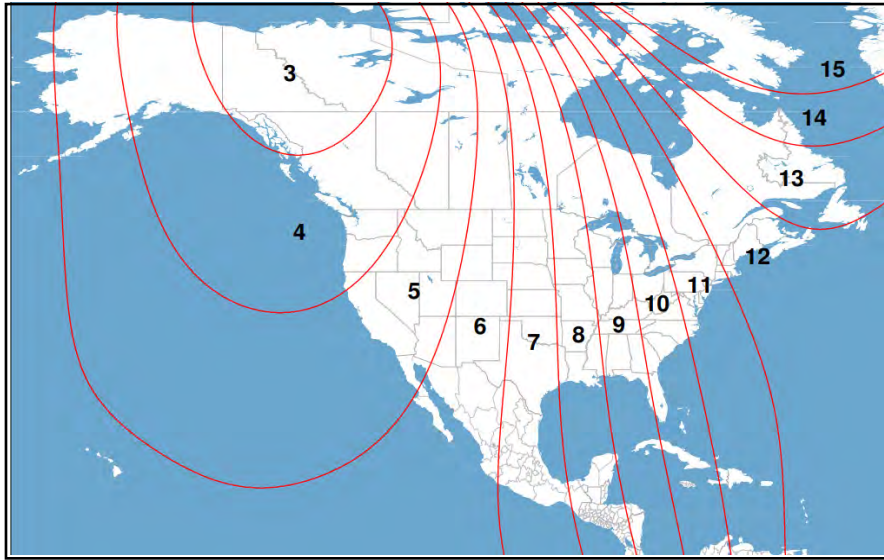


Figure 28

1. Compass Zone Setting.

- a. With display turned ON, push the mirror power button for 3 seconds or until a number is displayed in the display window.
- b. **PIO: Set the zone to 10.**
DIO: Refer to the Zone Map and toggle button until correct zone is displayed. See Figure 28.
- c. Release button.
- d. The display will return to normal compass mode (showing either a "C" or a directional heading) within 10 seconds of no switch activity.

2. Calibrate Compass.

- a. If a "C" is displayed in window, drive the vehicle in one circle at less than 5 mph.
- b. Correct compass heading should now be displayed.

NOTE: Correct compass zone must be selected prior to compass calibration to ensure accurate calibration. If the vehicle is driven in a new zone, repeat zone selection procedure.

FUNCTION AND QUALITY CHECK

These points **MUST** be checked to ensure a quality installation.


ACCESSORY FUNCTION CHECK**LOOK FOR:**

- | | |
|---|--|
| ✓ Vehicle should be in a fairly well lit area. Turn ignition (ACC power) to ON. | Verify green LED is on. If it is not ON press ON / OFF button - confirm LED is ON. |
|
Auto-Dimming Feature: | |
| ✓ Cover the forward-looking light sensor (located on the back of the mirror). | Verify mirror darkens. |
| ✓ Remove cover from photocell. | Mirror returns to clear state. |
|
Compass Feature: | |
| ✓ Look at the mirror compass display. | Correct compass heading should now be displayed. If a "C" is displayed in window, calibrate the compass. |
| ✓ Operation Instruction Cards | Place in the vehicle glove box. |
|
HomeLink Feature: | |
| ✓ Look at the mirror's (3) HomeLink buttons. | Verify all (3) buttons are illuminated when the vehicle ignition is ON. |
| ✓ Press the mirror's (3) HomeLink buttons. | HomeLink icon will appear in mirror. Press button again to stop the icon from flashing. |
|
Vehicle Function Check: | |
| ✓ Check dome light. | Verify the dome light functions properly. |
| ✓ Check the Sunroof if applicable. | Verify the sunroof functions properly. |
| ✓ Check remote outer mirror switch | Verify the switch functions properly. |
| ✓ Warranty Statement | Place Warranty Statement in the glove Box. DIO Only. |

Block Diagram
Frameless® EC Mirror w/Compass & HomeLink®


Applies to SET P/N 00016-05464

201, Corolla

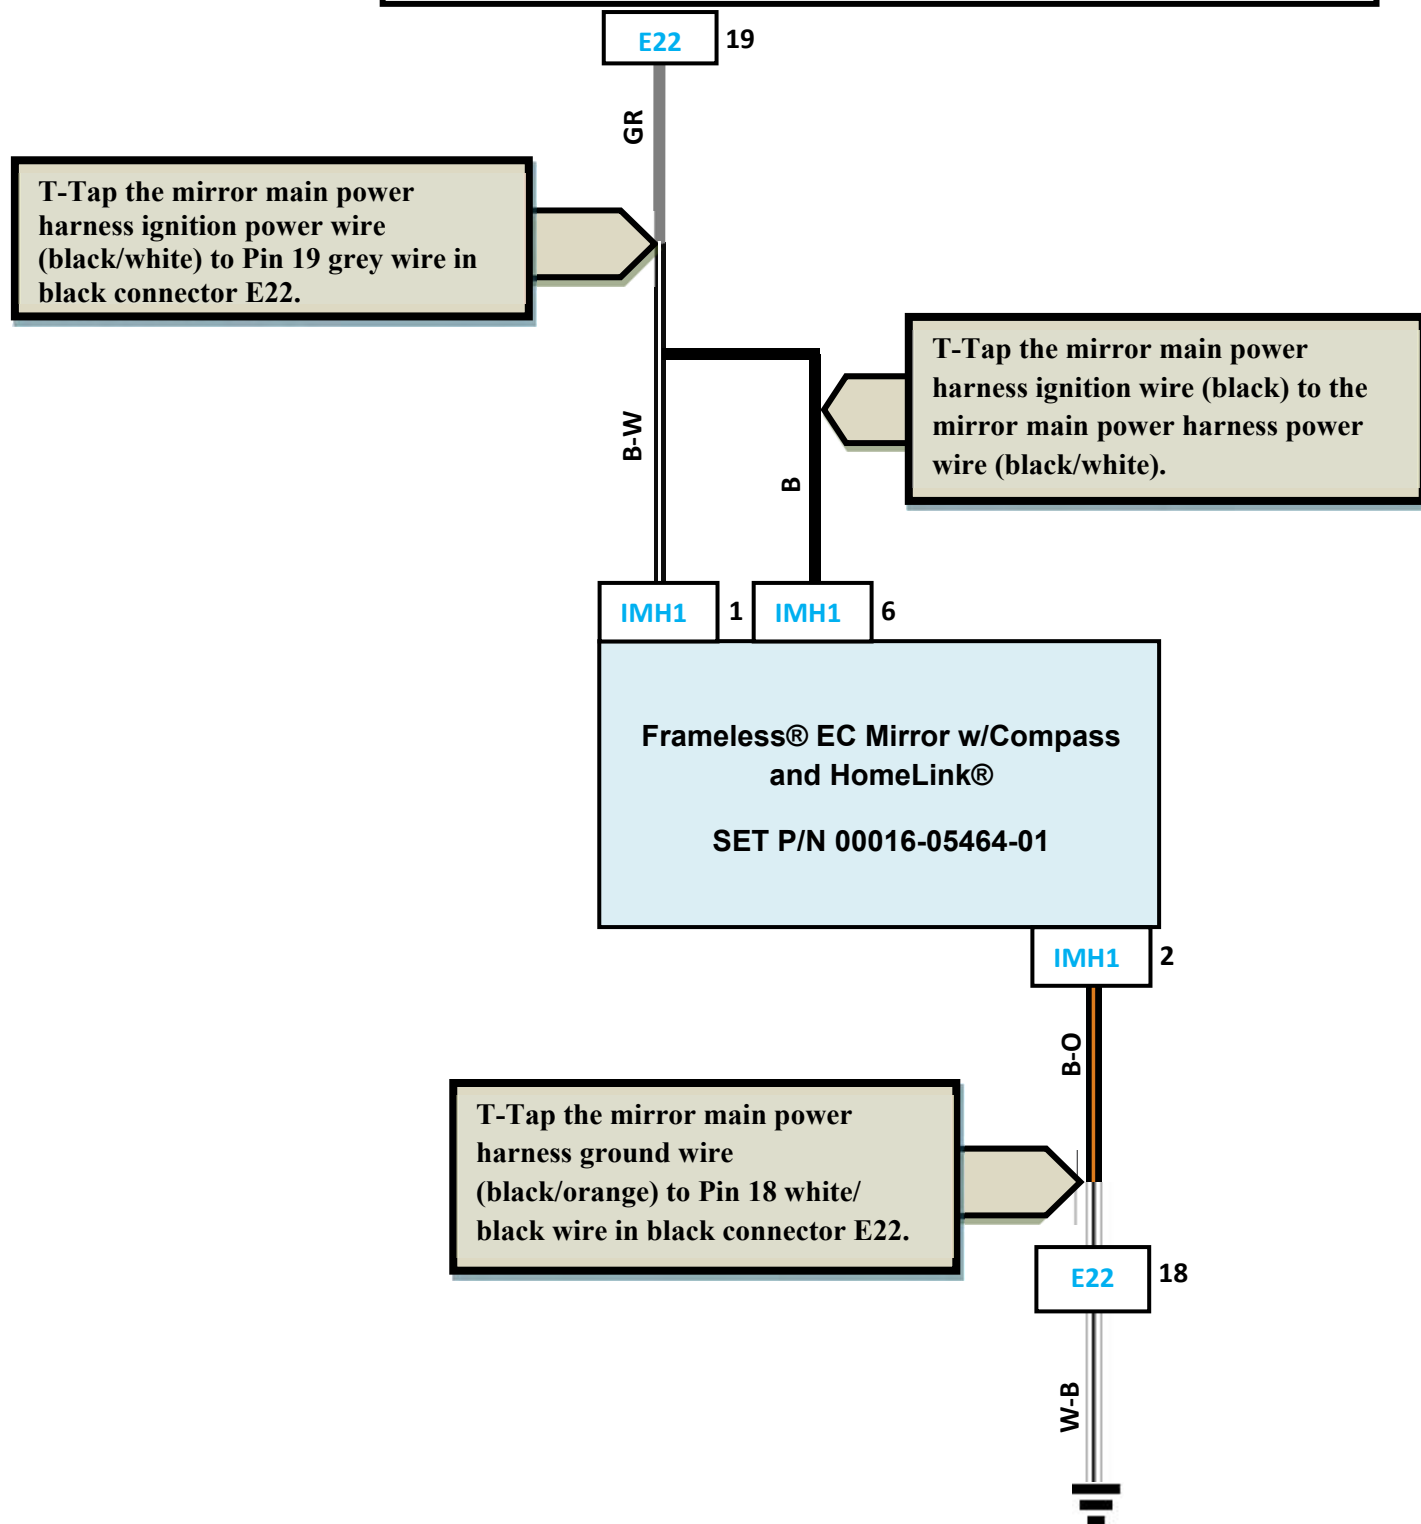

Checking the Harness Pin outs:

Connector IMH1: Frameless® EC Mirror w/Compass Power Harness Connector

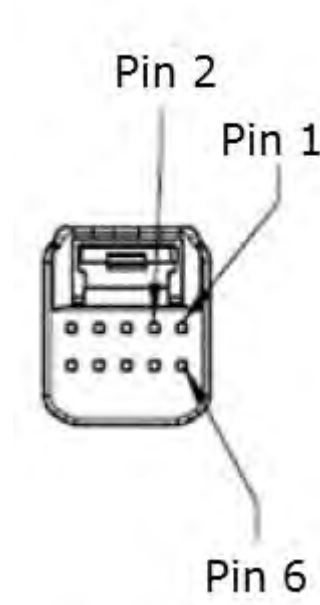


Connector view is from the front (pin side)

If feedback from the harness on any of the pins does not match the results shown in the Proper Operation field below, check the connection to the vehicle wiring and re-test.

Pin	Wire Color	Test Reference	Proper Operation
1	Black w/White Trace	Pin 1 to ground	Approx. 12 VDC with switch in ON position Approx. 0 VDC with switch in OFF position
2	Black w/Orange Trace	Pin 2 to ground	Always Continuity
6	Black	Pin 3 to ground	Approx. 12 VDC with switch in ON position Approx. 0 VDC with switch in OFF position

Pin	Wire Color	Circuit
1	Black w/White Trace	Ignition
2	Black w/Orange Trace	Ground
6	Black	Battery

Vehicle Connector I8 Circuit

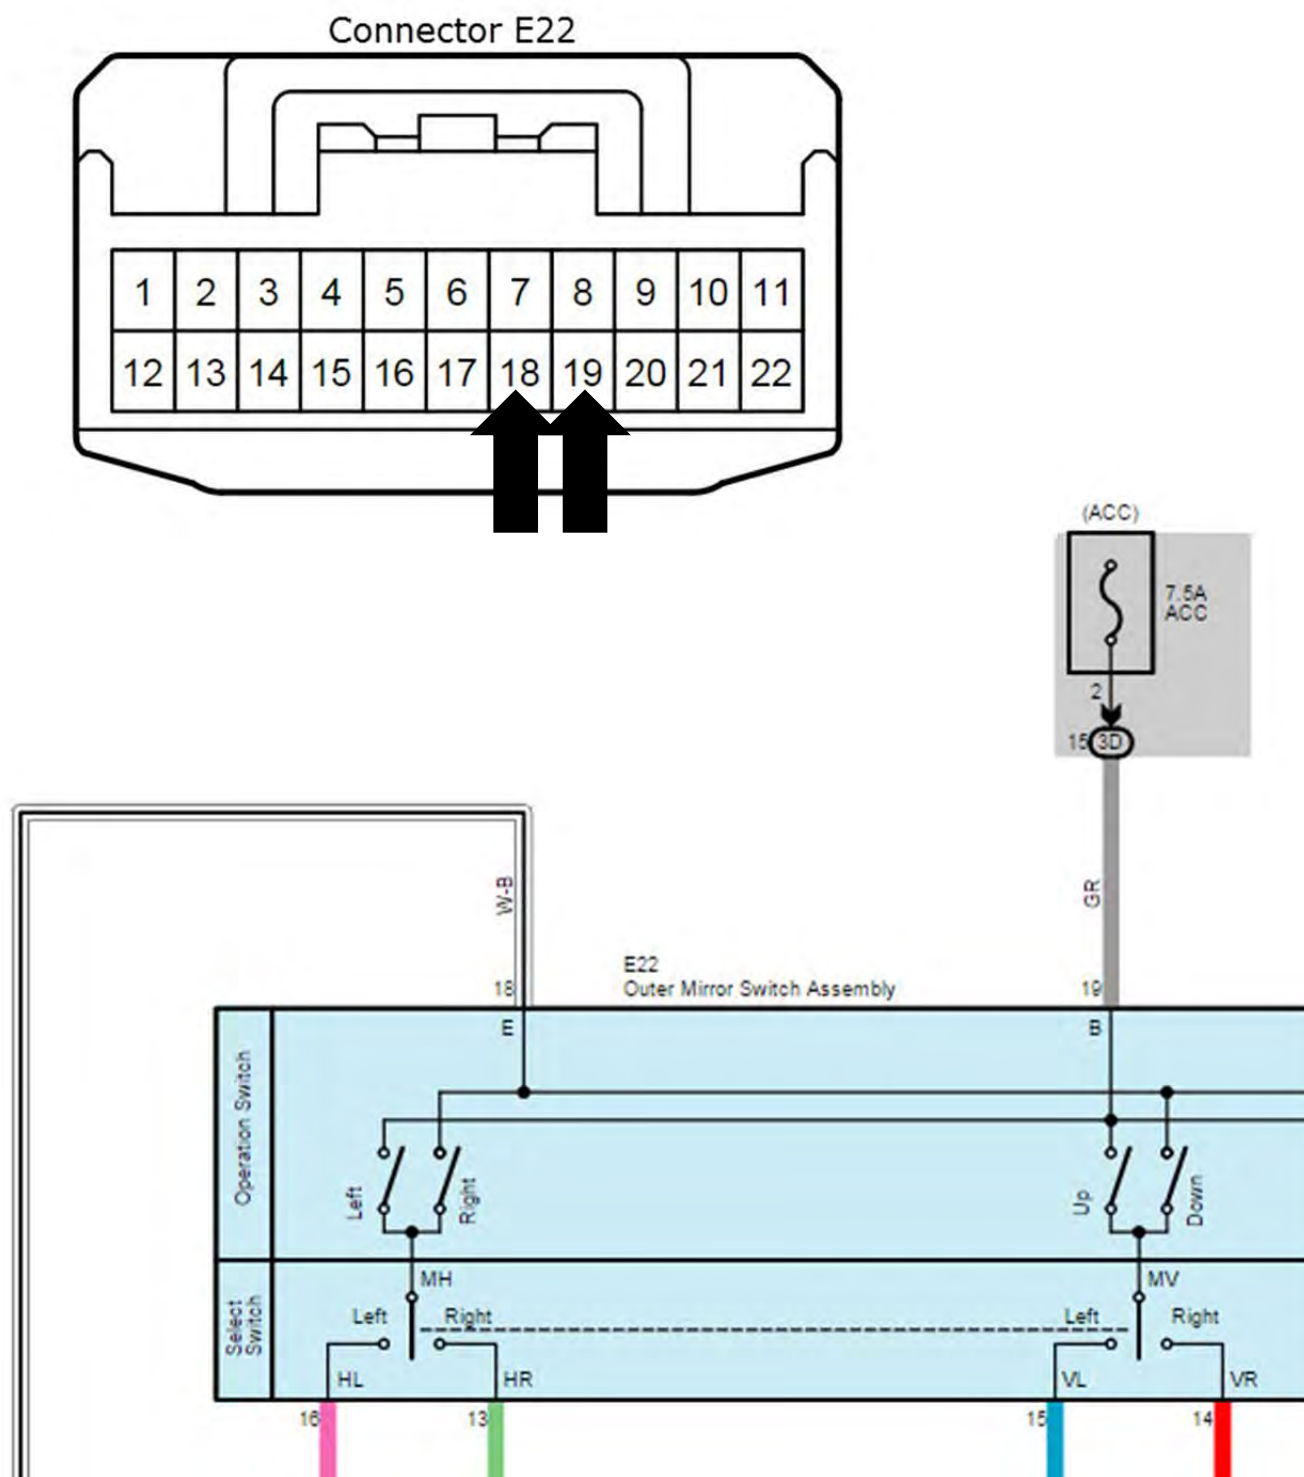

LIMITED WARRANTY – SOUTHEAST TOYOTA

SOUTHEAST TOYOTA DISTRIBUTORS, LLC ("we," "our" and "us") provides the following limited warranty on our accessories, excluding tires, ("Accessories" or "Accessory") installed on a Toyota. This limited warranty is not provided by and does not bind or provide benefit to the vehicle dealer, the manufacturer, or Toyota Motor Sales, U.S.A., Inc. This limited warranty does not apply to tires; please consult the tire manufacturer and/or its materials accompanying the vehicle for any warranty terms concerning tires. This limited warranty also does not apply to ToyoGuard Exterior Paint Sealant and ToyoGuard Interior Protector; please consult the ToyoGuard Limited Warranty Certificate for the warranty terms concerning those products.

SCOPE OF LIMITED WARRANTY:

A. Protection:

- i. **Accessories Installed by Southeast Toyota Distributors, LLC on a new Toyota vehicle.** We warrant that, for a period of 36 months or 36,000 miles, whichever occurs first, we will repair or replace (includes labor), free of charge, any defect in such an Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. The warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator. Accessories installed by Southeast Toyota Distributors, LLC are identified on the vehicle's window sticker (Monroney Label).
- ii. **Accessories Installed by a Toyota Dealer on a Toyota vehicle.** We warrant that, for 12 months, regardless of mileage, from the date such an Accessory was installed on the vehicle or the remainder of the Toyota new vehicle warranty, whichever is longer, we will repair or replace (includes labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. For a new vehicle, the warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator.
- iii. **Accessories purchased from a Toyota Dealer but not installed by the Toyota Dealer.** We warrant that, for a period of 12 months, regardless of mileage, from the date the accessory was purchased, we will repair or replace (does not include labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory.

B. Limitation of Warranty. This limited warranty does not apply to, and we will not repair, replace, or reimburse you for: (1) wheel balancing and wheel alignments, except for one wheel balancing or alignment during the first 12 months or 12,000 miles, whichever occurs first, from the vehicle's In-Service Date, as defined above, (2) abrasions or dents, whatever their cause, and any failure or damage resulting directly or indirectly from accidents, collisions, impacts from foreign objects, fire, theft, larceny, explosion, malicious mischief, vandalism, civil commotion, riots, war, or any other similar causes, (3) any failure or damage resulting directly or indirectly from lightning, windstorms, hail, water, floods, subfreezing temperatures, airborne chemicals, tree sap, dust, salt, and any other environmental conditions or similar causes, (4) any failure or damage caused by: (a) a failure of any part, other than the Accessory, (b) any misuse, abuse, improper towing, negligence or lack of maintenance of the vehicle or Accessory, (c) the alteration, modification or repair of the Accessory by anyone other than persons expressly authorized by us to perform such alteration, modification or repair, or (d) the use of the vehicle for commercial purposes, competitive driving or racing, (5) any failure or damage, if the Accessory has not been installed according to instructions, (6) any failure or damage occurring outside of Canada, the United States of America, its territories or possessions, (7) except to the extent required by the state whose laws govern this limited warranty, any consequential, secondary, or unreasonable costs that may be suffered as a result of the need to repair or replace the Accessory, including without limitation any loss of use of the vehicle, road service, towing, storage charges, inconvenience, loss of wages and/or income, additional expense incurred, loss of transportation, rental car expense, or any derivative damage to persons or things other than the Accessory, including other parts of the vehicle, or (8) liability for damage to property or for injury to or death of any person, arising out of the operation, maintenance or use of your vehicle whether or not related to the covered Accessory.

C. Exclusive Remedy. If there is a valid claim under this limited warranty for a defect due to faulty material or workmanship in the Accessory, we will, at our option, either: (i) repair, (ii) replace or (iii) provide a full refund of the purchase price of the Accessory. We have no other obligations under this limited warranty. Refunds will be made to the vehicle owner. If the vehicle is leased, the refund will be made to the leasing company.

HOW TO MAKE A CLAIM: In the event of a warranty claim, please contact the nearest Toyota dealer to arrange for repairs. The dealership must receive our prior authorization before making repairs covered by this limited warranty. The dealer will contact Southeast Toyota Distributors, LLC at 1-888-851-2722, select option #5 (Warranty Department), then option #4 (Repairs), for instructions on processing a warranty claim, if they are not already familiar with the process. If you have any questions or concerns regarding repairs covered by this limited warranty, please contact our **Customer Assistance Hotline at 1-800-301-6859**.

OUR DISPUTE RESOLUTION PROGRAM: Your satisfaction is our highest priority. In keeping with that focus, in the event that an issue arises related to this Limited Warranty, we invite you to call our Customer Assistance Hotline at 1-800-301-6859 to discuss it. In most cases, we expect that a satisfactory resolution of your issue can be reached through engagement with that Department. If our Customer Loyalty Department is unable to resolve your issue to your satisfaction, we offer a dispute resolution program administered by the National Center for Dispute Settlement (NCDS) ("the Program"). The purpose of the Program is to resolve disputes in an informal setting before an impartial arbitrator. The Program is free of charge to you (although you must bear the cost of any expert witness or attorney you elect to employ). You are required to complete the Program before exercising rights or seeking remedies under the federal Magnuson-Moss Warranty Act, 15 U.S.C. § 2301 et seq. ("the Act"). If you choose to seek remedies that are not created by the Act, you are not required to use the Program before pursuing such remedies – although the Program is still available to you to resolve the dispute. When utilizing the Program, you will need to provide (a) the vehicle identification number of your vehicle, (b) the identity of your selling and servicing dealerships, (c) the mileage on your vehicle at relevant times, (d) the date and nature of any relevant repairs, (e) legible copies of repair orders and other relevant documents, (f) a summary of the unresolved issue and the requested action, and (g) your contact information. In most cases, the dispute resolution process under the Program will be completed within forty (40) days of your submission of your request and will consist of steps such as an initial eligibility determination, an opportunity for you and us to submit information in writing relating to your claim, an oral hearing, and a decision from the arbitrator. A decision will be binding on you only if you choose to accept it. You may submit a request to NCDS by telephone at their toll free number: (877)-276-8848 or in writing at P.O. Box 463196, Mt. Clemens, MI 48046. You may obtain additional information regarding the Program at www.ncdsusa.org. In the event that the NCDS does not exist or no longer handles disputes for us at the time that you seek to submit a request, you may contact our **Customer Assistance Hotline at 1-800-301-6859** to obtain current information about our dispute resolution programs.

GENERAL LIMITATION OF WARRANTY: THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES OR LIABILITIES. IN NO EVENT SHALL WE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSIONS OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE INFORMATION OR EXCLUSION MAY NOT APPLY. NO EXPRESS WARRANTY OF FITNESS OR MERCHANTABILITY IS GRANTED BY THIS LIMITED WARRANTY. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THOSE DESCRIBED IN THIS DOCUMENT. ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH MAY BE APPLICABLE BY OPERATION OF LAW SHALL BE LIMITED TO THE PERIOD OF THIS WRITTEN LIMITED WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY. THIS LIMITED WARRANTY PROVIDES SPECIFIC LEGAL RIGHTS, AND THERE MAY BE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, MUST BE BROUGHT WITHIN A PERIOD NOT EXCEEDING 12 MONTHS AFTER EXPIRATION OF THIS LIMITED WARRANTY. THE REMEDIES SPECIFIED HEREIN AND THOSE SPECIFIED BY APPLICABLE LAW ARE THE ONLY REMEDIES AVAILABLE. WE ASSUME NO OTHER OBLIGATION OR RESPONSIBILITY WITH REGARD TO THE ACCESSORY. WE NEITHER ASSUME, NOR AUTHORIZE ANYONE TO ASSUME FOR US, ANY ADDITIONAL LIABILITY IN CONNECTION HERewith.

GENERAL: This limited warranty describes the complete and exclusive rights that result from the purchase of Accessories. No oral representations or statements may be relied upon. This limited warranty may not be amended or modified, and additional rights may not be granted, unless in a written statement signed by one of our officers. This limited warranty shall be governed by the laws of the state where the vehicle is purchased, excluding laws concerning conflicts of law. We may delegate the performance of our duties and obligations and assign our rights and benefits hereunder. For inquiries regarding this limited warranty, we can be contacted directly at **Customer Assistance Hotline at 1-800-301-6859**, or by mail to: **Southeast Toyota Distributors, LLC, Attention: Customer Loyalty Department, 100 Jim Moran Boulevard, Deerfield Beach, Florida 33442.**