



**Southeast Toyota Distributors, LLC  
Accessory Installation Instructions**

**2018 Prius C  
Frameless EC Mirror w/ Compass  
and HomeLink**

**Recommended Tools**

Year & Model:	2018 Prius C
Part Number:	00016-05464
Accessory Code:	ME4000, ME4010
PIO / DIO:	PIO / DIO
Business Partner:	L42

<b>Safety Tools</b>	
Safety Glasses	
<b>Installation Tools</b>	Notes
Needle Nose Pliers	
Screw Gun	
T20 Torx Bit/Driver	
#2 Phillips Bit	
Nylon Tool	
Dark Towel/ Cloth	
10mm Socket/Wrench	
Ratchet/Driver	
Torque Wrench	48 in-lb and 15.5 in-lb
<b>Special Chemicals</b>	
N/A	
<b>Special Tools</b>	
N/A	
<b>Safety Tools</b>	

**Conflicts**

Vehicles with factory HomeLink
--------------------------------

**General Applicability**

Fits Models	
1	2018 Models

**Additional Items Required For Installation**

Item#	Description:
1.	A-Pillar Clip (62217-52120)

**Sequence of Application**

Item#	Accessory:
1.	N/A

**SPECIALNOTE: Installation Sequences**

After TMS & Safety mandated preparatory steps have been taken, the installation sequence is the suggested method for completing the accessory installation. In some instances the suggested sequence is written for one associate to install & in others the sequence is given as part of a team accessory installation. Unless otherwise stated in the document, the associates may perform the installation steps in any order to make the installation as efficient as possible while maintaining consistent quality.

**Legend**

**STOP:** Damage to the vehicle may occur. Do not proceed until process has been complied with.

**OPERATOR SAFETY:** Use caution to avoid risk of injury.

**CAUTION:** A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.

**TOOLS & EQUIPMENT:** Used in Figures calls out the specific tools and equipment recommended for this process.

**REVISION MARK:** This mark highlights a change in installation with respect to previous issue.

**SAFETY TORQUE:** This mark indicates that torque is related to safety.

## Table of Contents

---

I.	Preparation.....	1-5
a.)	Table of Contents.....	2
b.)	Kit/Hardware & Wire Harness Bag Contents.....	3
c.)	Parts for Installation.....	4
d.)	Service & Warranty Information.....	5
II.	Procedures	
a.)	Battery Removal.....	6
b.)	Vehicle Disassembly –Installation Process.....	6-22
III.	Re-install Battery.....	22
IV.	Compass Zone Setting.....	23
V.	Calibrate Compass.....	23
VI.	Function and Quality Check.....	24
VII.	Diagnostic /Block Diagrams & Connectors Procedures.....	25-27
VIII.	Blank Page.....	28
IX.	Warranty Statement.....	29-30

**Kit/Hardware Bag Contents:**

<b>Item #</b>	<b>Quantity</b>	<b>Description</b>
1.	3	Red T-Taps
2.	10	Wire Ties
3.	6	Foam Tapes
4.	1	Quick Reference Guide


**Parts for Installation:**

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation. These guidelines can be found in the “Accessory Installation Practices” document.

This document covers such items as:

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, re-checking torque procedure, etc.).
- Vehicle Disassembly/ Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Item #	Quantity	Description
1.	1	Frameless Mirror w/ Compass& HomeLink
2.	1	Wire Harness Cover
3.	1	Main Power Harness

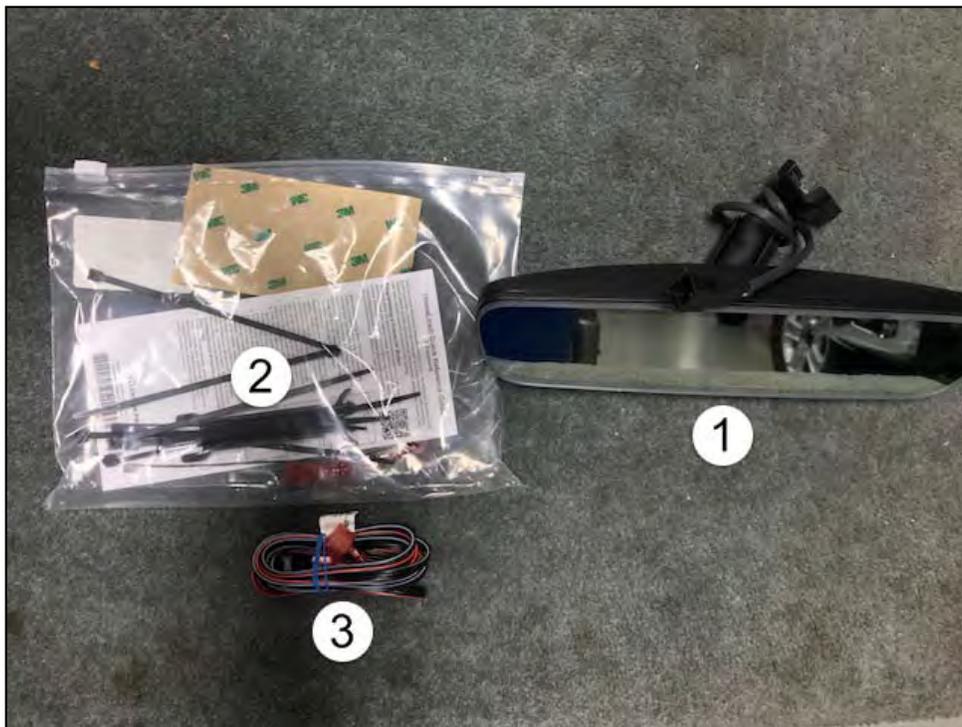

**Service & Warranty Information:**

Image Key	Parts information		Warranty Information	
	Part Number	Description	Warranty Time	Labor Op. Code
A	00016-05464	EC Mirror w/ Comp. and HL	0.5	AHM001
B	00016-35463-04	Mirror Wire Cover	0.1	AHM002

If you are a dealer located outside of the Southeast Region, please contact the SET Accessory Warranty Department at (888) 851-2722 or email [Accessory.Warranty@SETToyota.com](mailto:Accessory.Warranty@SETToyota.com) for claim payment instructions.

**Image:**



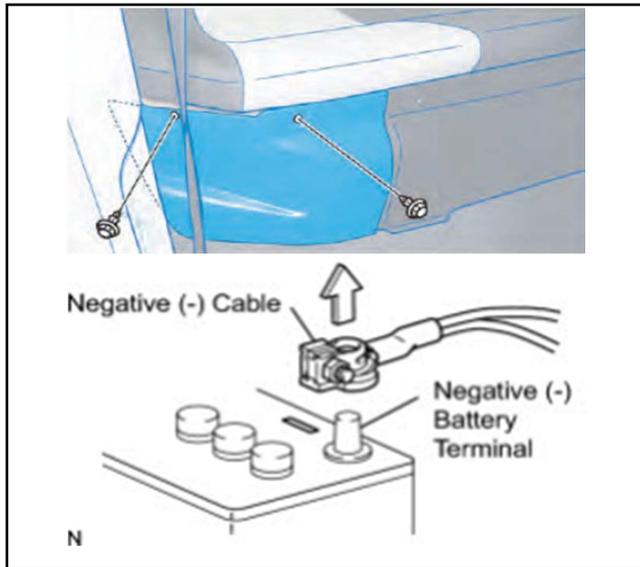


Figure 1

1. Remove the (2) Clips. Remove the passenger's side rear seat under cover. See figure 1.
2. Remove the NEGATIVE (-) battery terminal before starting any disassembly. See figure 1.



**Caution: DO NOT touch the positive terminal.**



**Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to disable the SRS system.**

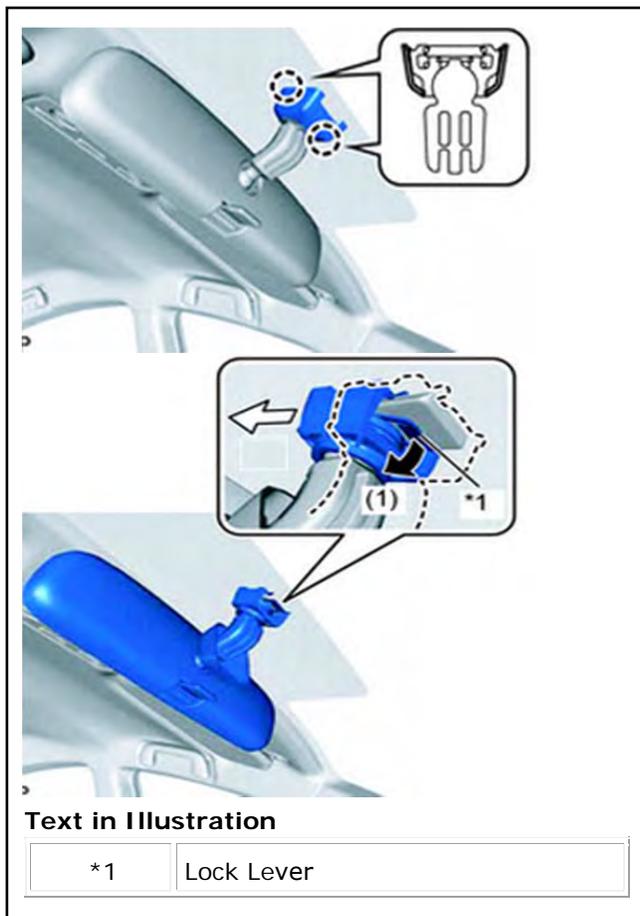


Figure 2

**Vehicle Disassembly –Installation Process**

3. Disengage the 2 claws and separate the inner mirror base cover. See figure 2. Pull the lock lever in the direction indicated by the arrow in the illustration, and slide the inner rear view mirror assembly upward to remove it. See figure 2.

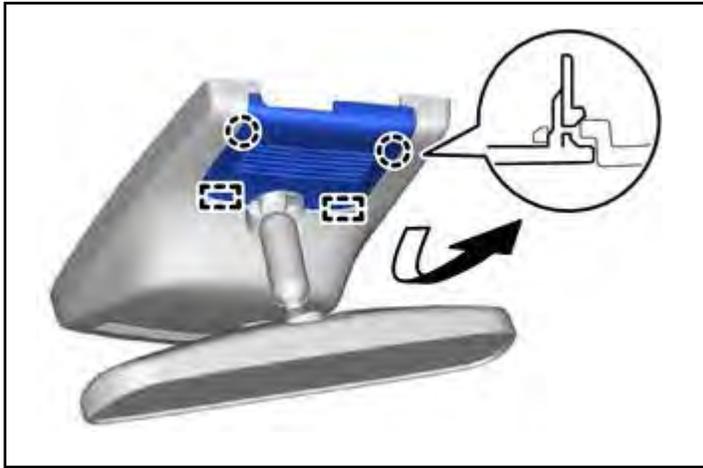


Figure 3c

**Vehicles Equipped with Safety Sense (Lane Departure) System- Cover Removal.**

Disengage the 2 claws and 2 guides to remove the pre-collision city cover 2nd as shown in the illustration. See figure 3c.

**NOTICE:** If these claws are disengaged separately, they may break. Insert a molding remover between them and pull it down to disengage the claws simultaneously.

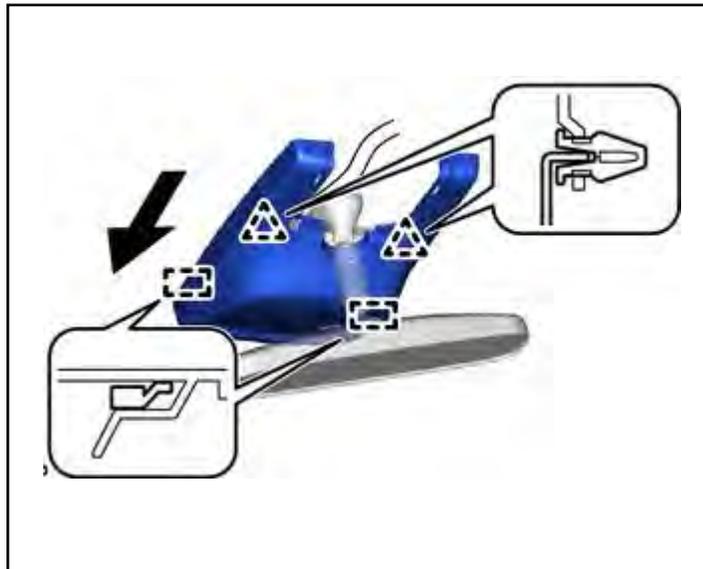


Figure 3d

Disengage the 2 clips and 2 guides to remove the pre-collision city cover as shown in the illustration. See figure 3d.



**NOTICE:** To avoid damaging the guides, always slide the No. 1 forward recognition cover parallel to the windshield glass.

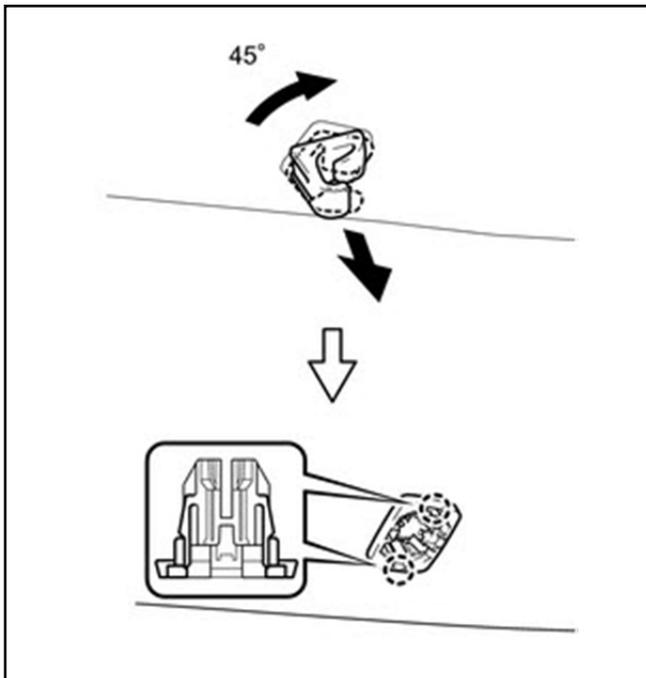


Figure 4

4. Turn the LH visor holder approximately 45° and pull it out as shown in the illustration. See figure 4.

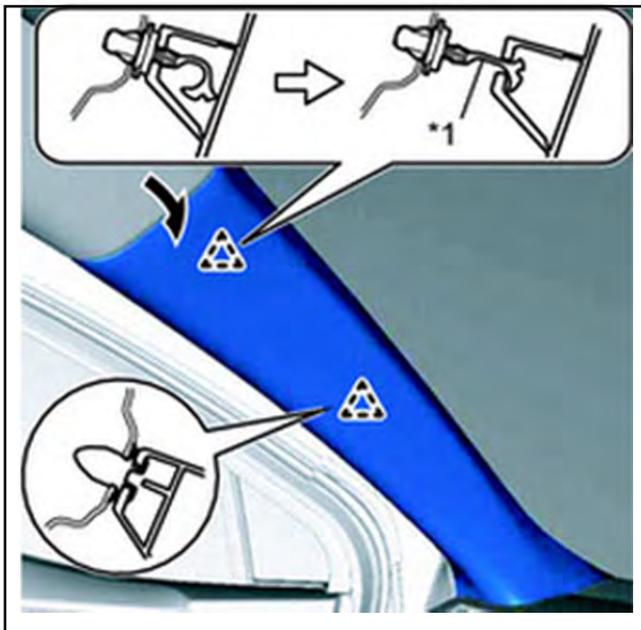


Figure 5

5. Pull the upper part of the garnish toward the inside of the cabin and disengage the garnish from the base of the 2 clips. See figure 5.

**Text in Illustration**

*1	Front Pillar Garnish Clip
----	---------------------------

**HINT:** Let the front pillar garnish LH hang down from the front pillar garnish clip.

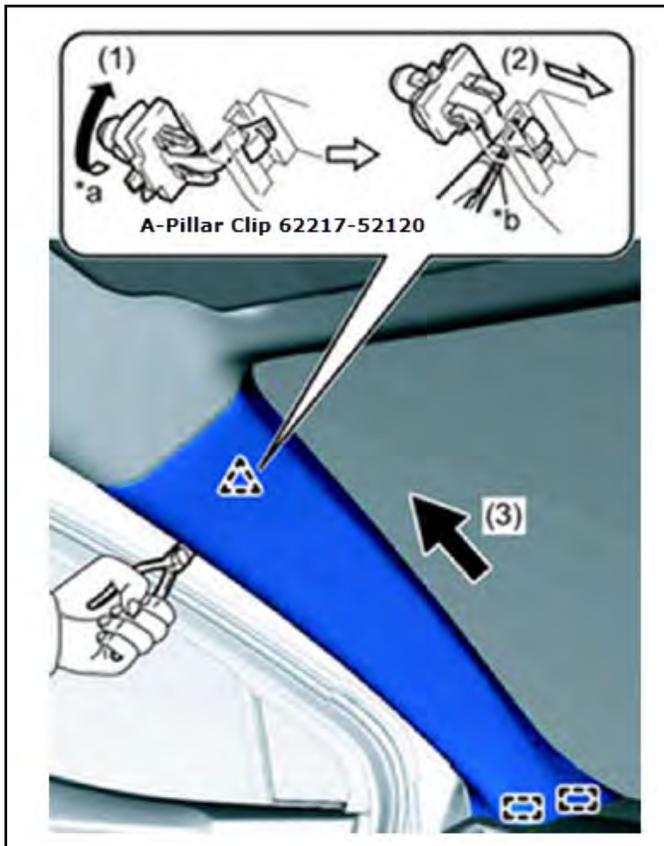


Figure 6

6. Using needle-nose pliers with the tips wrapped with protective tape, rotate the front A-Pillar garnish clip 90° in the direction indicated by the arrow (1) shown in the illustration. Pull the front A-Pillar garnish LH in the direction indicated by the arrow (2) shown in the illustration to disengage it from the front A-Pillar garnish clip. Pull the front A-Pillar garnish LH in the direction indicated by the arrow (3) shown in the illustration to disengage the 2 guides to remove the front A-Pillar garnish LH. Remove the A-Pillar garnish clip from the A-Pillar. The clip CAN NOT be reused. DESTROY and DISPOSE of clip. See figure 6.



**NOTE: Install a new A-Pillar garnish clip when replacing A-Pillar garnish at the end of installation. A-Pillar clip 62217-52120 is not provided in the mirror kit. This item must be ordered separately.**

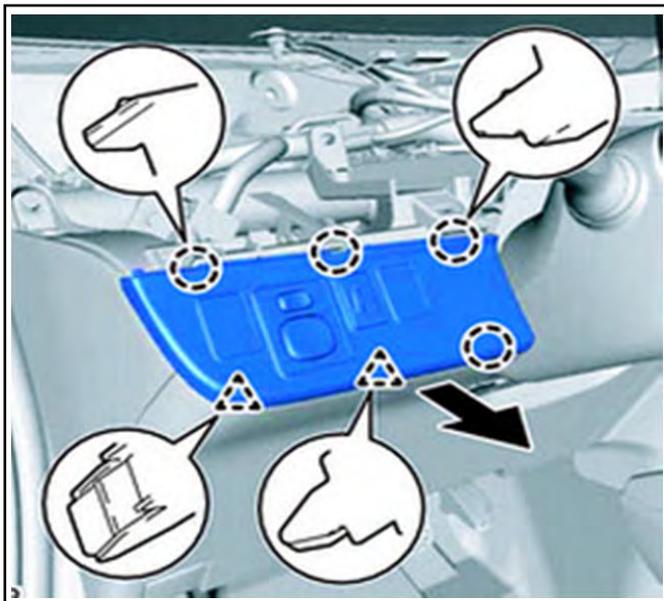


Figure 7

7. Disengage the 4 claws and 2 clips as shown in the illustration. Disconnect each connector and remove the No. 1 switch base. See figure 7.

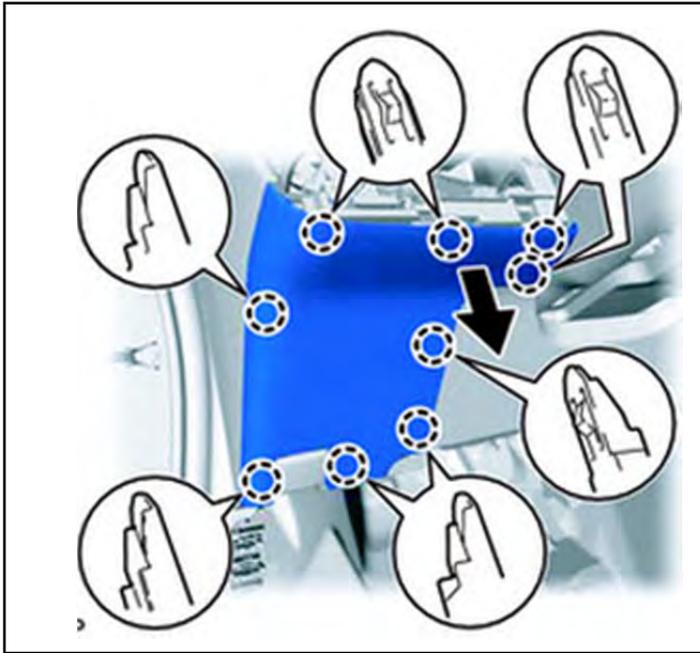


Figure 8

8. Disengage the 9 claws and remove the lower instrument panel finish panel LH as shown in the illustration. See figure 8.

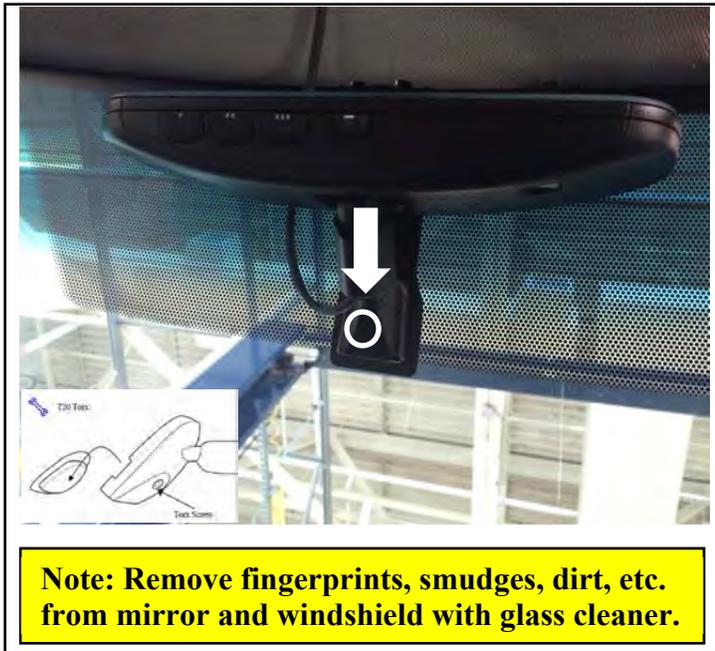


Figure 9

9. Mount the Frameless® EC Mirror w/Compass in reverse of original factory mirror removal. Slide and attach the rearview mirror assembly and tighten mirror set screw with a T20 torx bit or driver. DO NOT over tighten screw. See figure 9.

**S** Torque: 15.5 in.\*lbf



**Do not use power tools to tighten screw. Hands tighten only.**



Figure 10

10. Route the mirror harness to overhead console opening using the precut notches on the front of the headliner. See figure 10.



Figure 11

11. Install the wire harness cover over the wire harness. Seat the bottom of the cover securely to base of the mirror. Extend the top of the cover fully into headliner. See figure 11.



**Note: Vehicles with Lane departure System (Saftey Sense) will not require the wire harness cover. Follow the instructions below to install the Pre-Collision System Cover.**


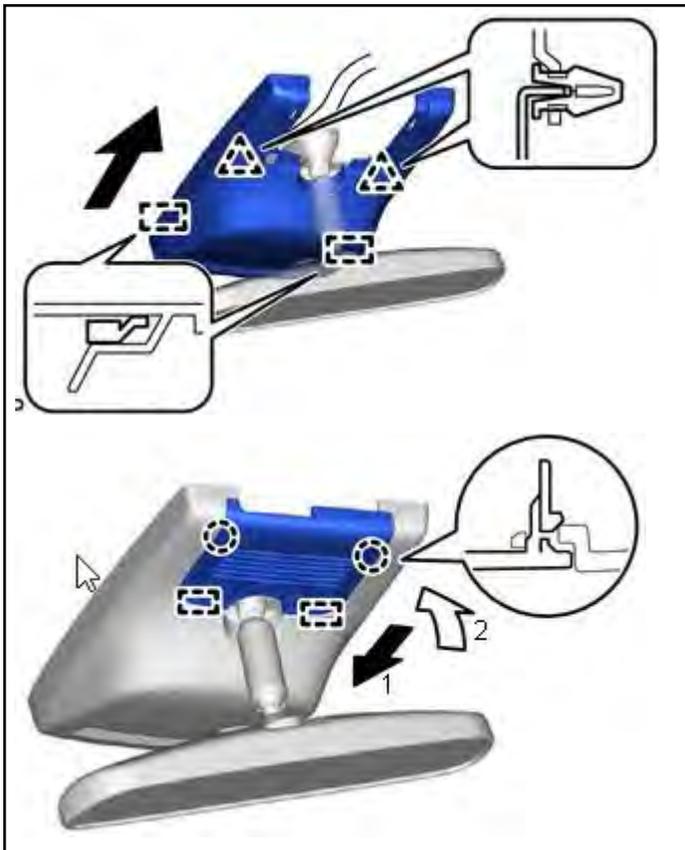


Figure 12

12. **Vehicles Equipped with Saftey Sense (Lane Departure) System-Cover Installation.**


Engage the 2 guides and 2 clips as shown in the illustration to install the pre-collision city cover.

See figure 12. Engage the 2 guides and 2 claws as shown in the illustration to install the pre-collision city cover 2nd. See figure 12.

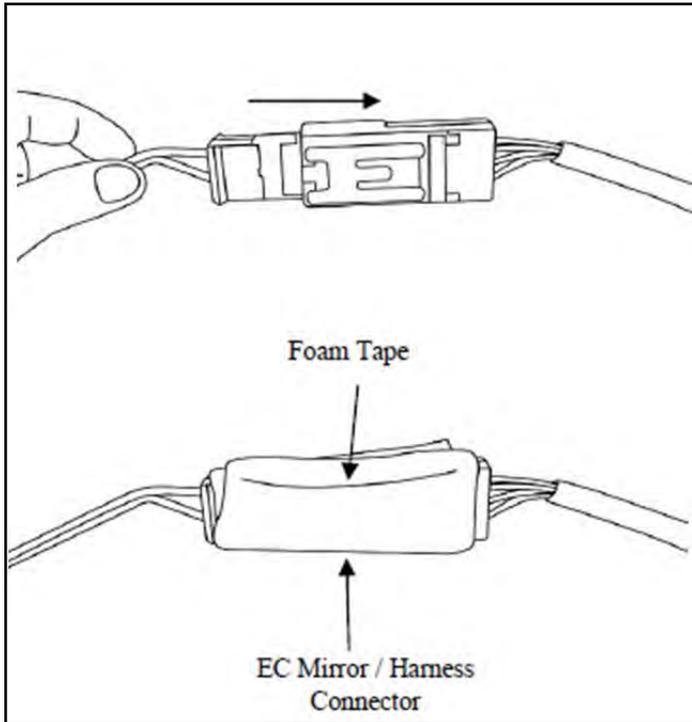


*Figure 13*

13. Connect the mirror harness to the mirror main power harness. Make sure both connectors are fully engaged. Wrap foam tape around connectors. See figure 13.

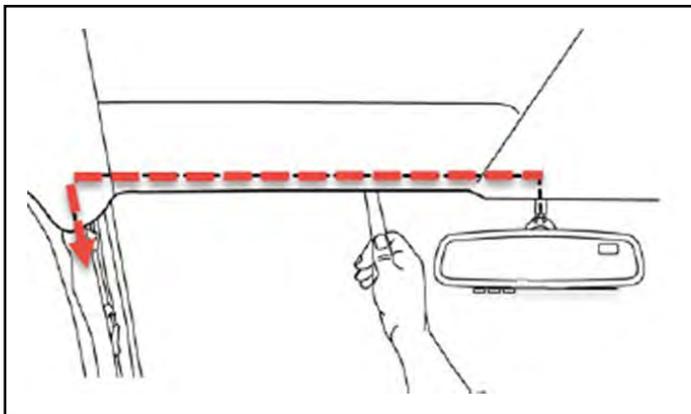


*Figure 14*

14. Route mirror main power harness along front edge of headliner towards the LH vehicle A-Pillar. See figure 14.

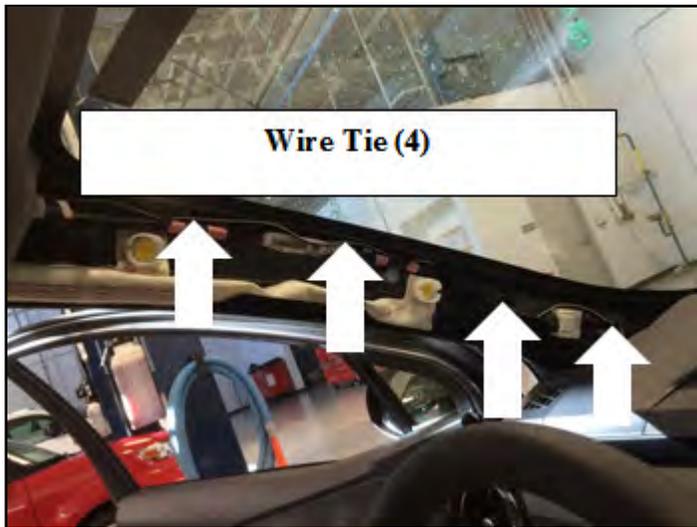

*Figure 15*

15. Route the mirror harness down to the bottom of the Front LH pillar. Wire tie the harness to the vehicle OE harness as shown using (3) wire ties. If equipped with a sunroof, be sure not to secure mirror harness to sunroof drain tube. See figure 15.

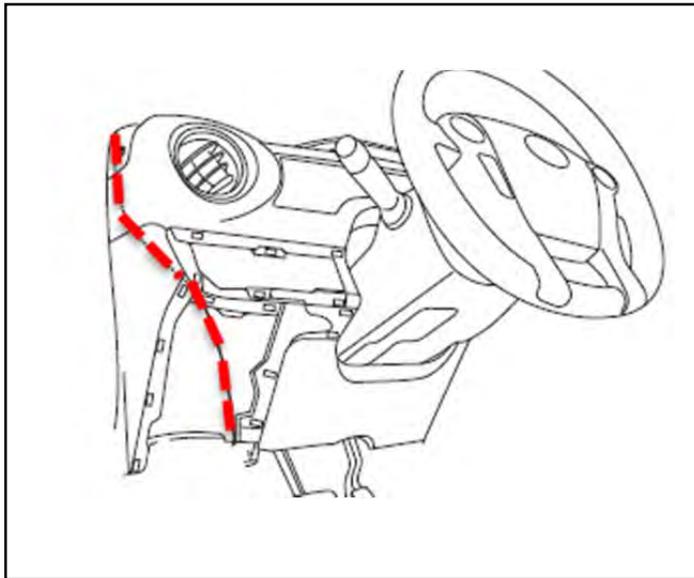

*Figure 16*

16. Route the harness from the bottom of the A-pillar through the opening on the back of the dash, and out through the opening on the lower dash panel. See figure 16.

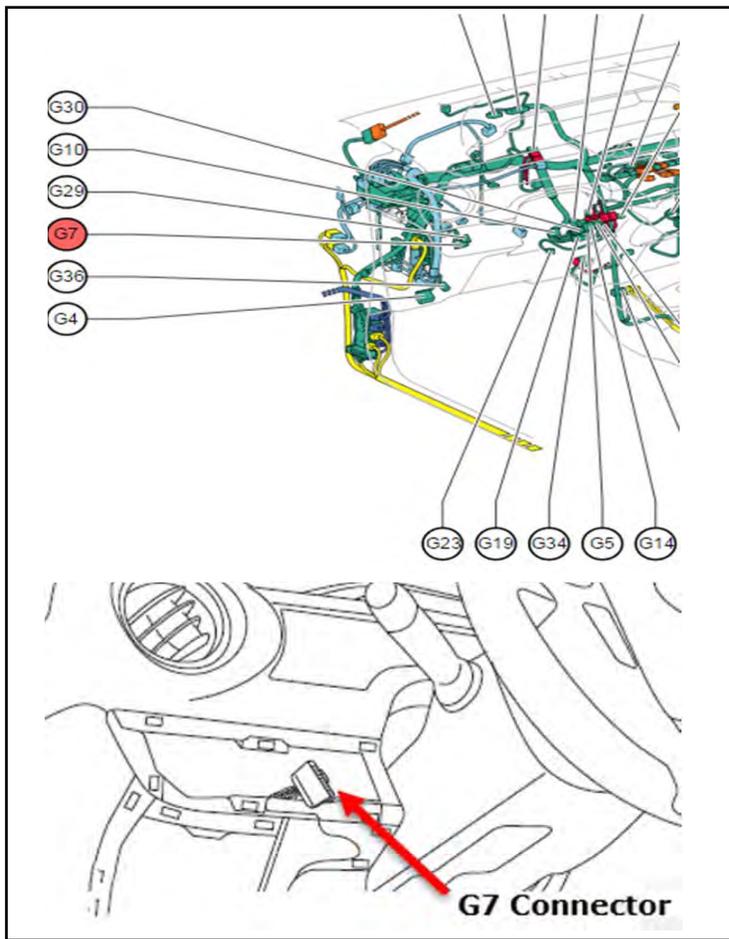


Figure 17a

17. Locate white outer mirror remote switch connector G7 (10 pin) in the lower dash panel. See figures 17a and 17b.

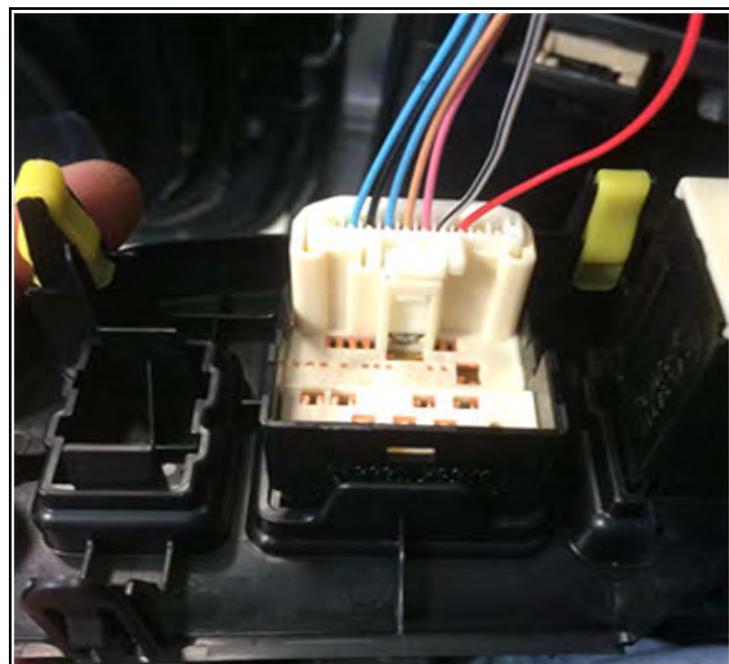


Figure 17b

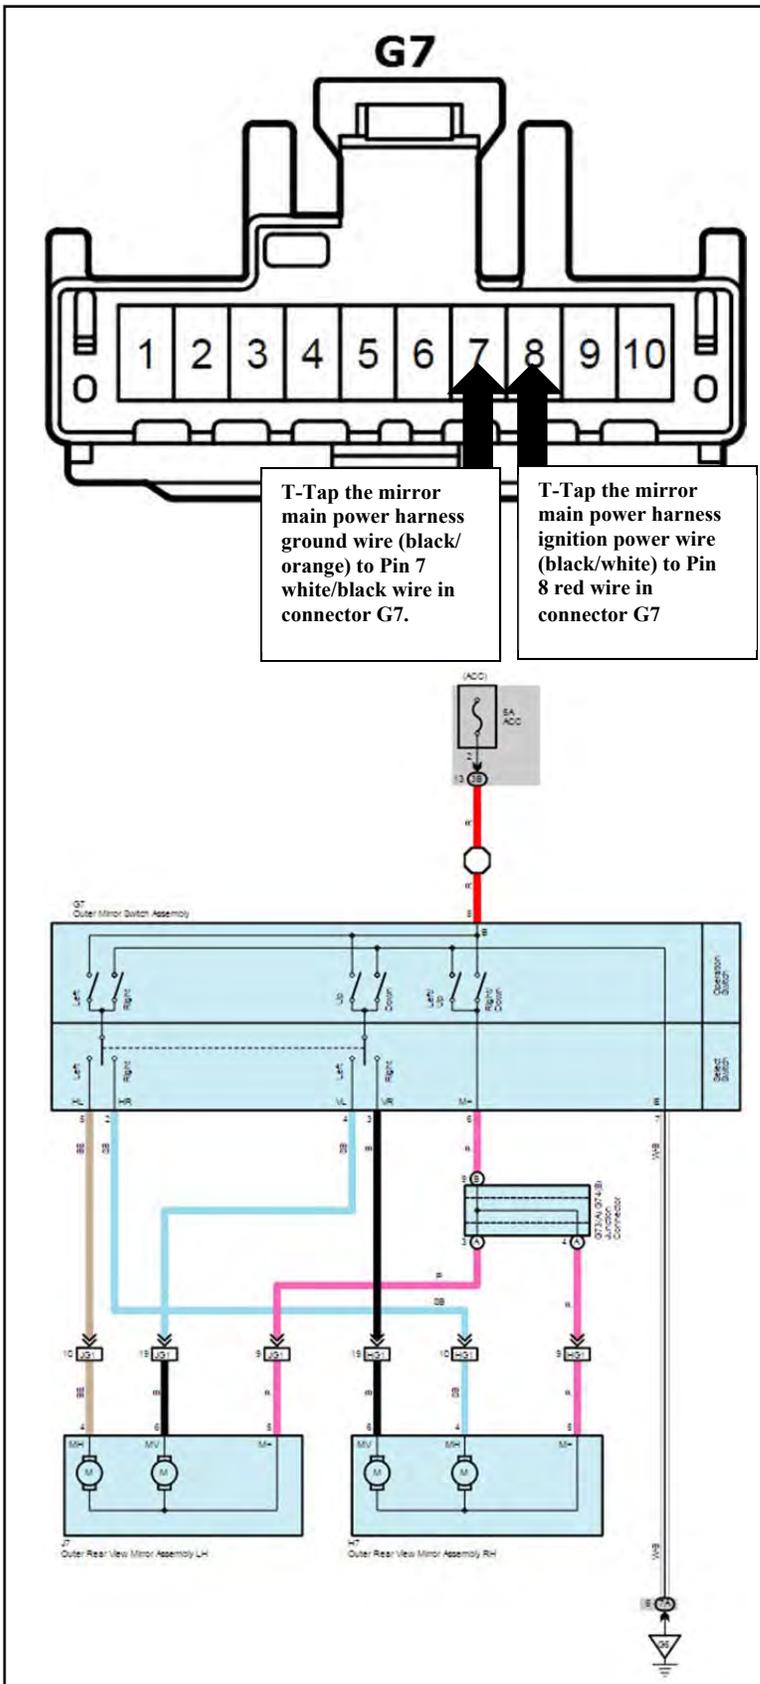


Figure 18a

18. T-Tap the mirror main power harness ignition power wire (black/white) to Pin 8 red wire in connector G7. T-Tap the mirror main power harness ground wire (black/orange) to Pin 7 white/black wire in connector G7. See figure 18a and figure 18b.



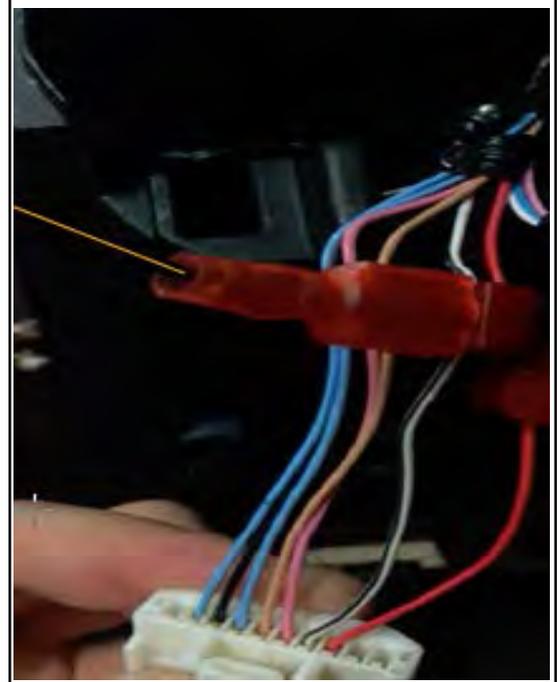


Figure 18b

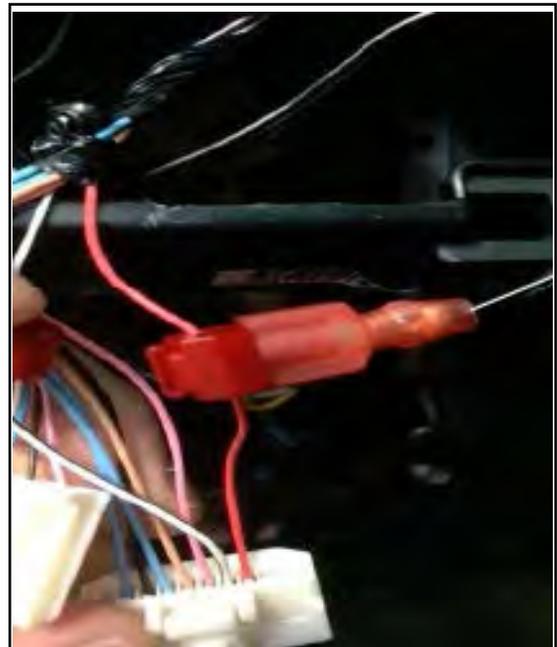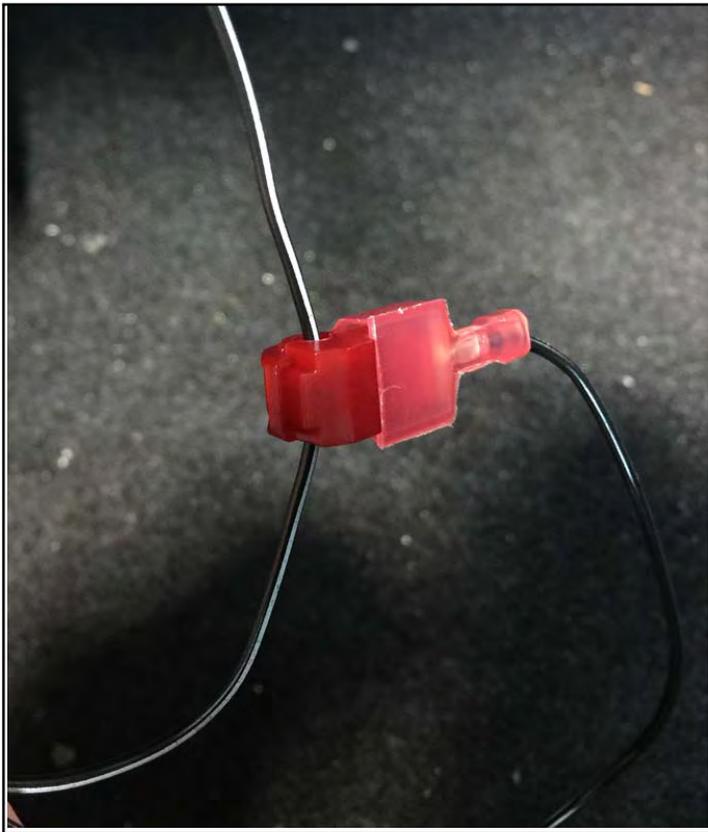

19. T-Tap the mirror main power harness power wire (black) to the mirror main power harness ignition wire (black/white). See figure 19.

*Figure 19*

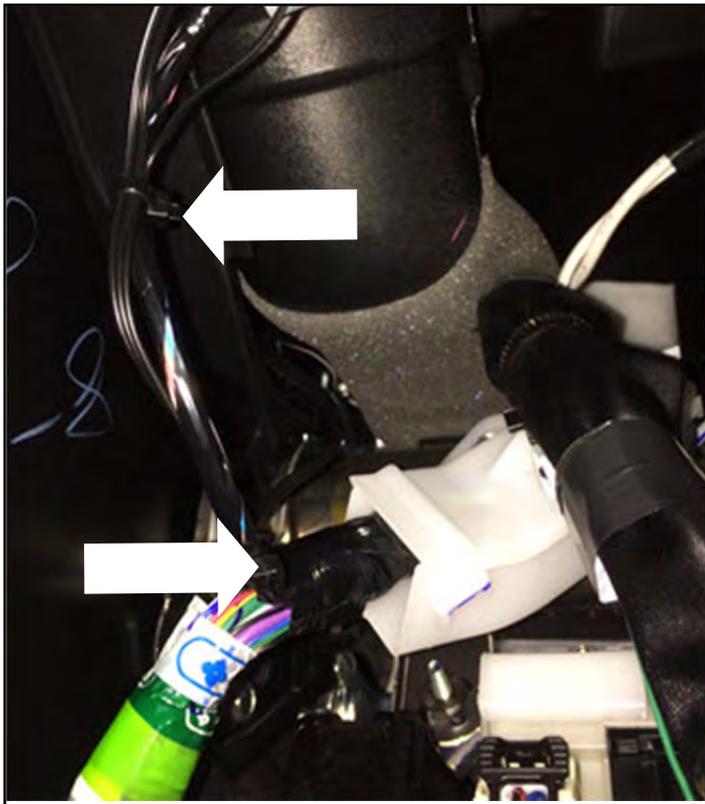


Figure 20

20. Bundle any excess wire. Secure the mirror main power harness to the remote mirror switch OE harness in the lower dash as shown with (2) wire ties. See figure 20.

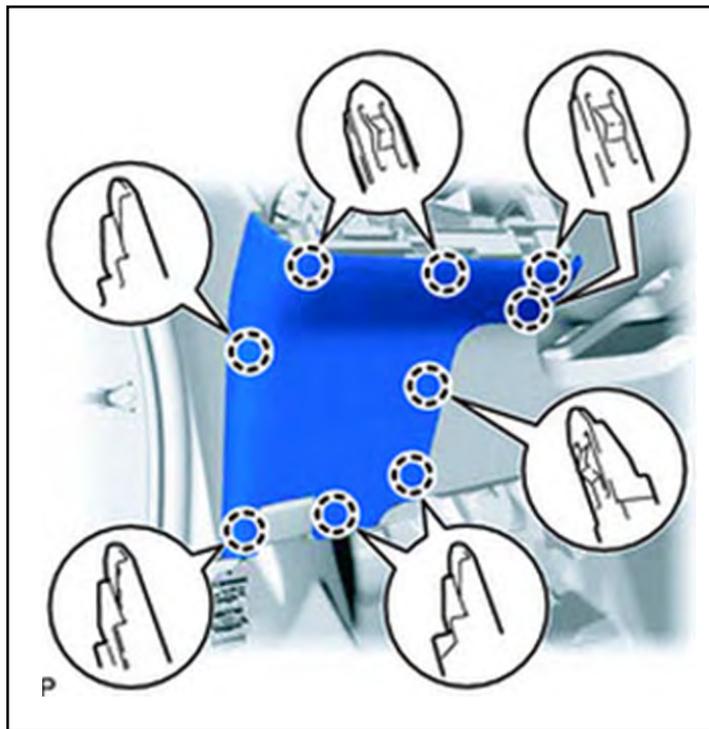


Figure 21a

21. Engage the 9 claws to install the lower instrument panel finish panel LH as shown in the illustration. Connect each connector. Engage the 4 claws and 2 clips to install the No. 1 switch base. See figure 21a and figure 21b.

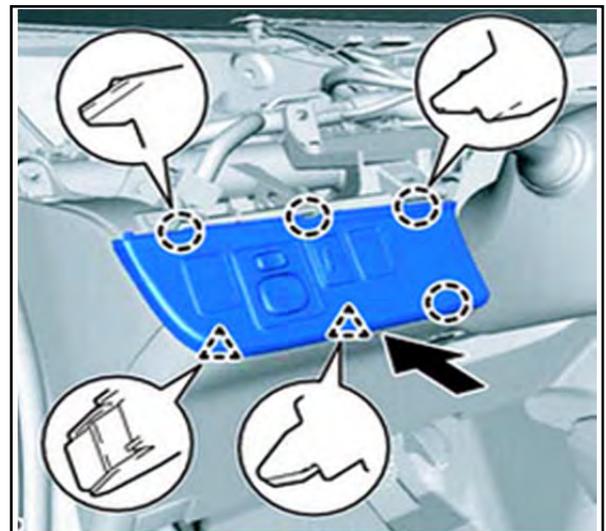


Figure 21b

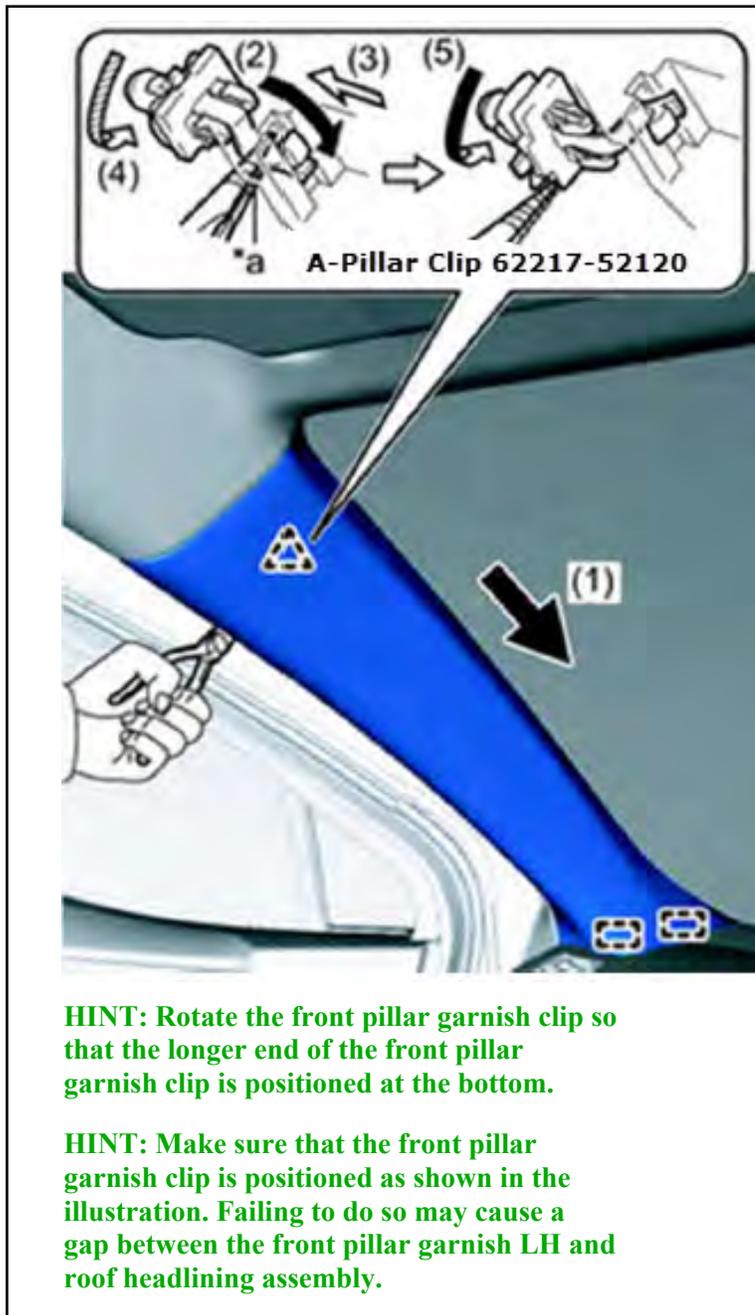


Figure 22

22. Install the New A-Pillar garnish clip 62217-52120 to vehicle A-Pillar.



**NOTE: Install a new A-Pillar garnish clip when installing garnish. DO NOT REUSE THE OLD CLIP. THE CLIP MUST BE REPLACED.**

**A-Pillar clip 62217-52120 is not provided in the mirror kit. This item must be ordered separately.**



Push the front pillar garnish LH in the direction indicated by the arrow (1) shown in the illustration to engage the 2 guides. Using needle-nose pliers with the tips wrapped with protective tape, bend the end of the front pillar garnish clip in the direction indicated by the arrow (2) shown in the illustration. Push the front pillar garnish LH in the direction indicated by the arrow (3) shown in the illustration and insert it to the front pillar garnish clip. Using needle-nose pliers with the tips wrapped with protective tape, rotate the front pillar garnish clip in the direction indicated by the arrow (4) shown in the illustration. Using needle-nose pliers with the tips wrapped with protective tape, push the front pillar garnish clip in the direction indicated by the arrow (5) and rotate it to the position shown in the illustration. See figure 22.

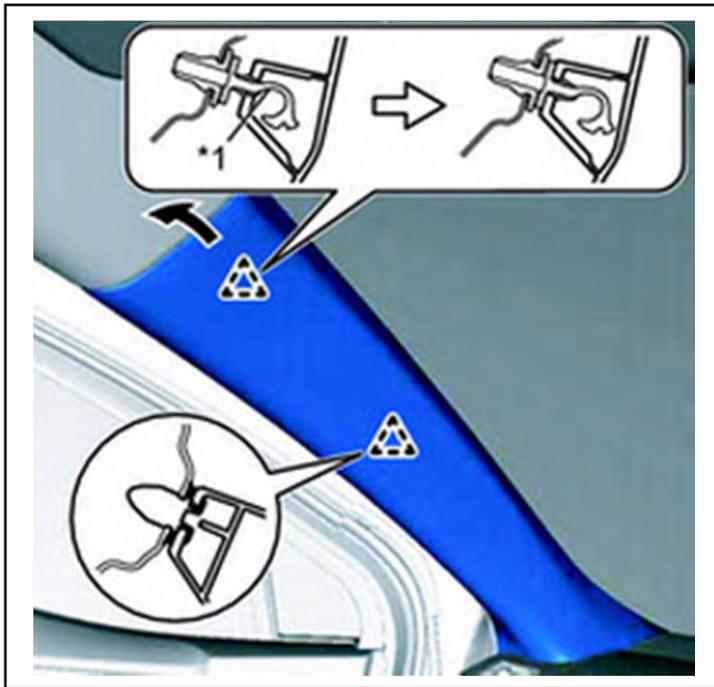


Figure 23

23. Engage the clip and front pillar garnish clip to install the front pillar garnish LH. See figure 23.

*1	Front Pillar Garnish Clip
----	---------------------------

**NOTICE:** If there is a gap between the front pillar garnish LH and roof headlining assembly, the front pillar garnish clip is not installed correctly. While lightly pressing the front pillar garnish LH as shown in the illustration, push it towards the front pillar garnish clip side.

**HINT:** Make sure that the curtain shield airbag assembly LH is not pinched.

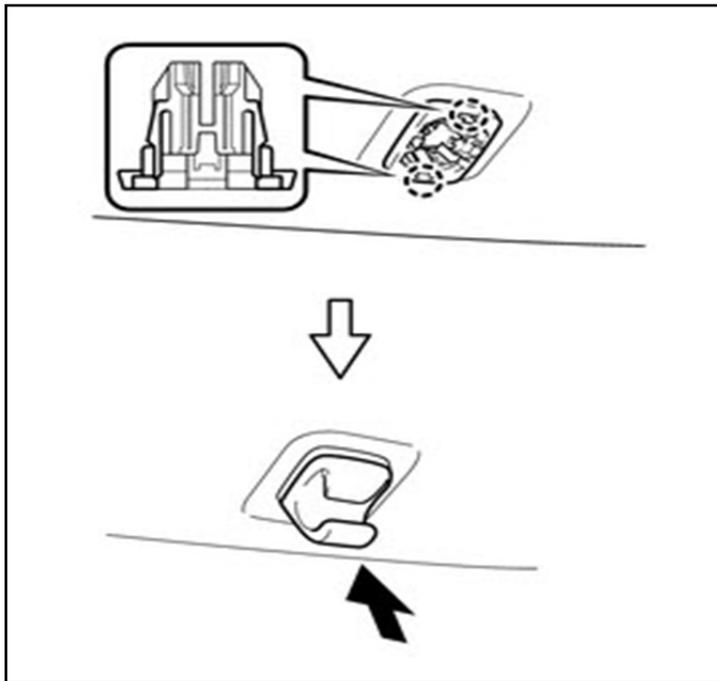


Figure 24

24. Engage the 2 claws. Push in the visor holder as shown in the illustration. See figure 24.

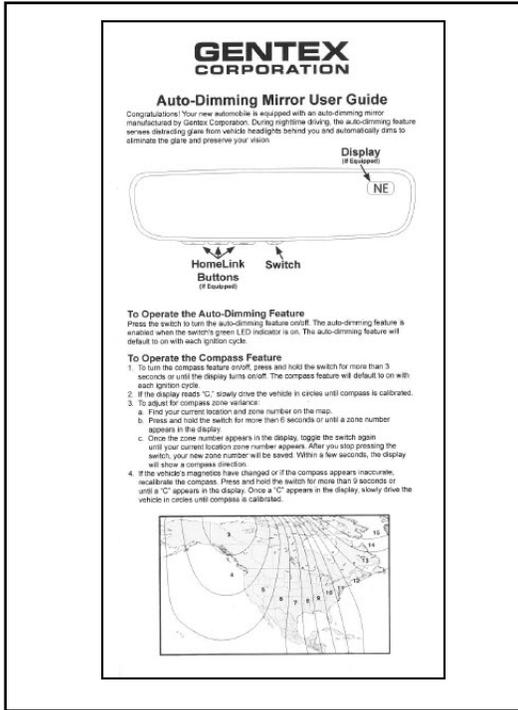


Figure 25

25. Place owner's cards in the glove box.  
 See Figure 25.

26. Print Warranty Statement and place in glove box, DIO only.

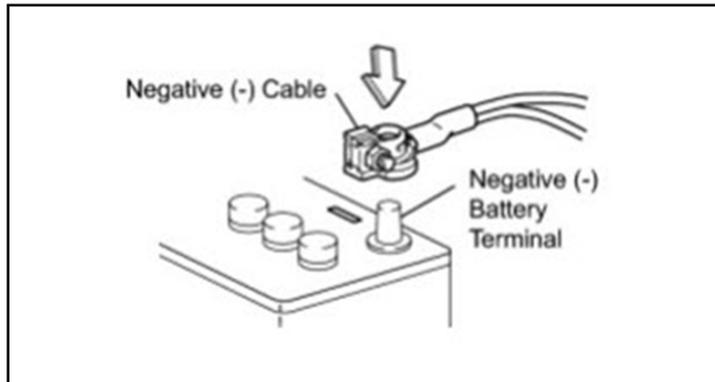


Figure 26

### Re-install Battery

27. Tighten the negative battery cable. See figure 26.

 Torque: 48in.\*lbf



**Caution: DO NOT touch the positive terminal.**

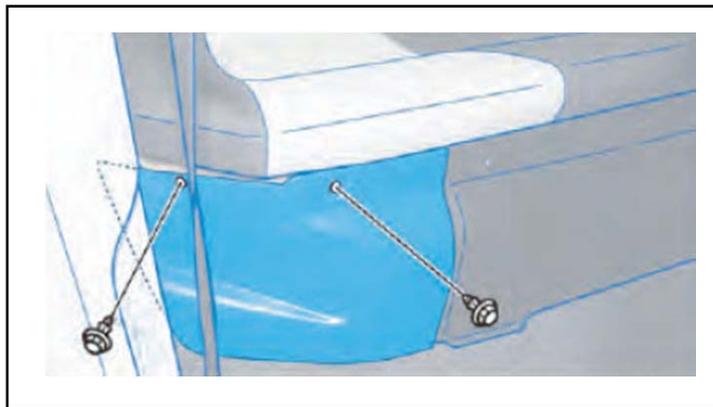


Figure 27

28. Install the passenger's side rear seat under cover and (2) clips. See figure 27.

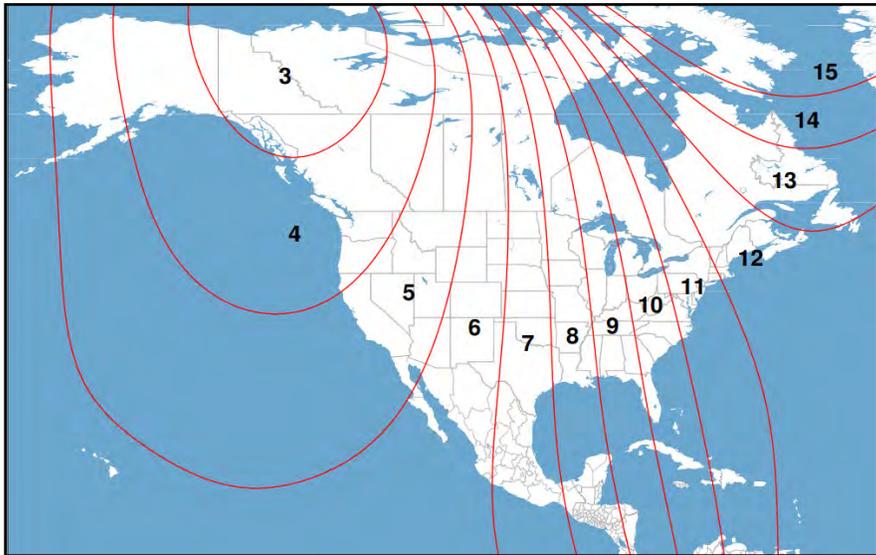


Figure 28

### 1. Compass Zone Setting.

- a. With display turned ON, push the mirror power button for 3 seconds or until a number is displayed in the display window.

- b. **PIO: Set to Zone 10.**  
DIO: Refer to the Zone Map and toggle button until correct zone is displayed. See Figure 28.

- c. Release button.

- d. The display will return to normal compass mode (showing either a "C" or a directional heading) within 10 seconds of no switch activity.

### 2. Calibrate Compass.

- a. If a "C" is displayed in window, drive the vehicle in one circle at less than 5 mph.
- b. Correct compass heading should now be displayed.

**NOTE: Correct compass zone must be selected prior to compass calibration to ensure accurate calibration. If the vehicle is driven in a new zone, repeat zone selection procedure.**

**FUNCTION AND QUALITY CHECK**


These points **MUST** be checked to ensure a quality installation.

**ACCESSORY FUNCTION CHECK****LOOK FOR:**

- |   |  |
|---|--|
| ✓ Vehicle should be in a fairly well lit area. Turn ignition (ACC power) to ON. | Verify green LED is on. If it is not ON press ON / OFF button - confirm LED is ON.                       |
| <b>Auto-Dimming Feature:</b>  |  |
| ✓ Cover the forward-looking light sensor (located on the back of the mirror).   | Verify mirror darkens.   |
| ✓ Remove cover from photocell.  | Mirror returns to clear state.   |
| <b>Compass Feature:</b>   |  |
| ✓ Look at the mirror compass display.   | Correct compass heading should now be displayed. If a "C" is displayed in window, calibrate the compass. |
| ✓ Operation Instruction Cards   | Place in the vehicle glove box.  |
| <b>HomeLink Feature:</b>  |  |
| ✓ Look at the mirror's (3) HomeLink buttons.                                    | Verify all (3) buttons are illuminated when the vehicle ignition is ON.                                  |
| ✓ Press the mirror's (3) HomeLink buttons.                                      | HomeLink icon will appear in mirror. Press button again to stop the icon from flashing.                  |
| <b>Vehicle Function Check:</b>  |  |
| ✓ Check dome light.   | Verify the dome light functions properly.  |
| ✓ Check remote outer mirror switch  | Verify the switch functions properly.  |
| ✓ Warranty Statement  | Place Warranty Statement in the glove box, DIO Only.   |

**Block Diagram**  
**Frameless® EC Mirror w/Compass & HomeLink®**

**Applies to SET P/N 00016-05464** **2018 Prius C**

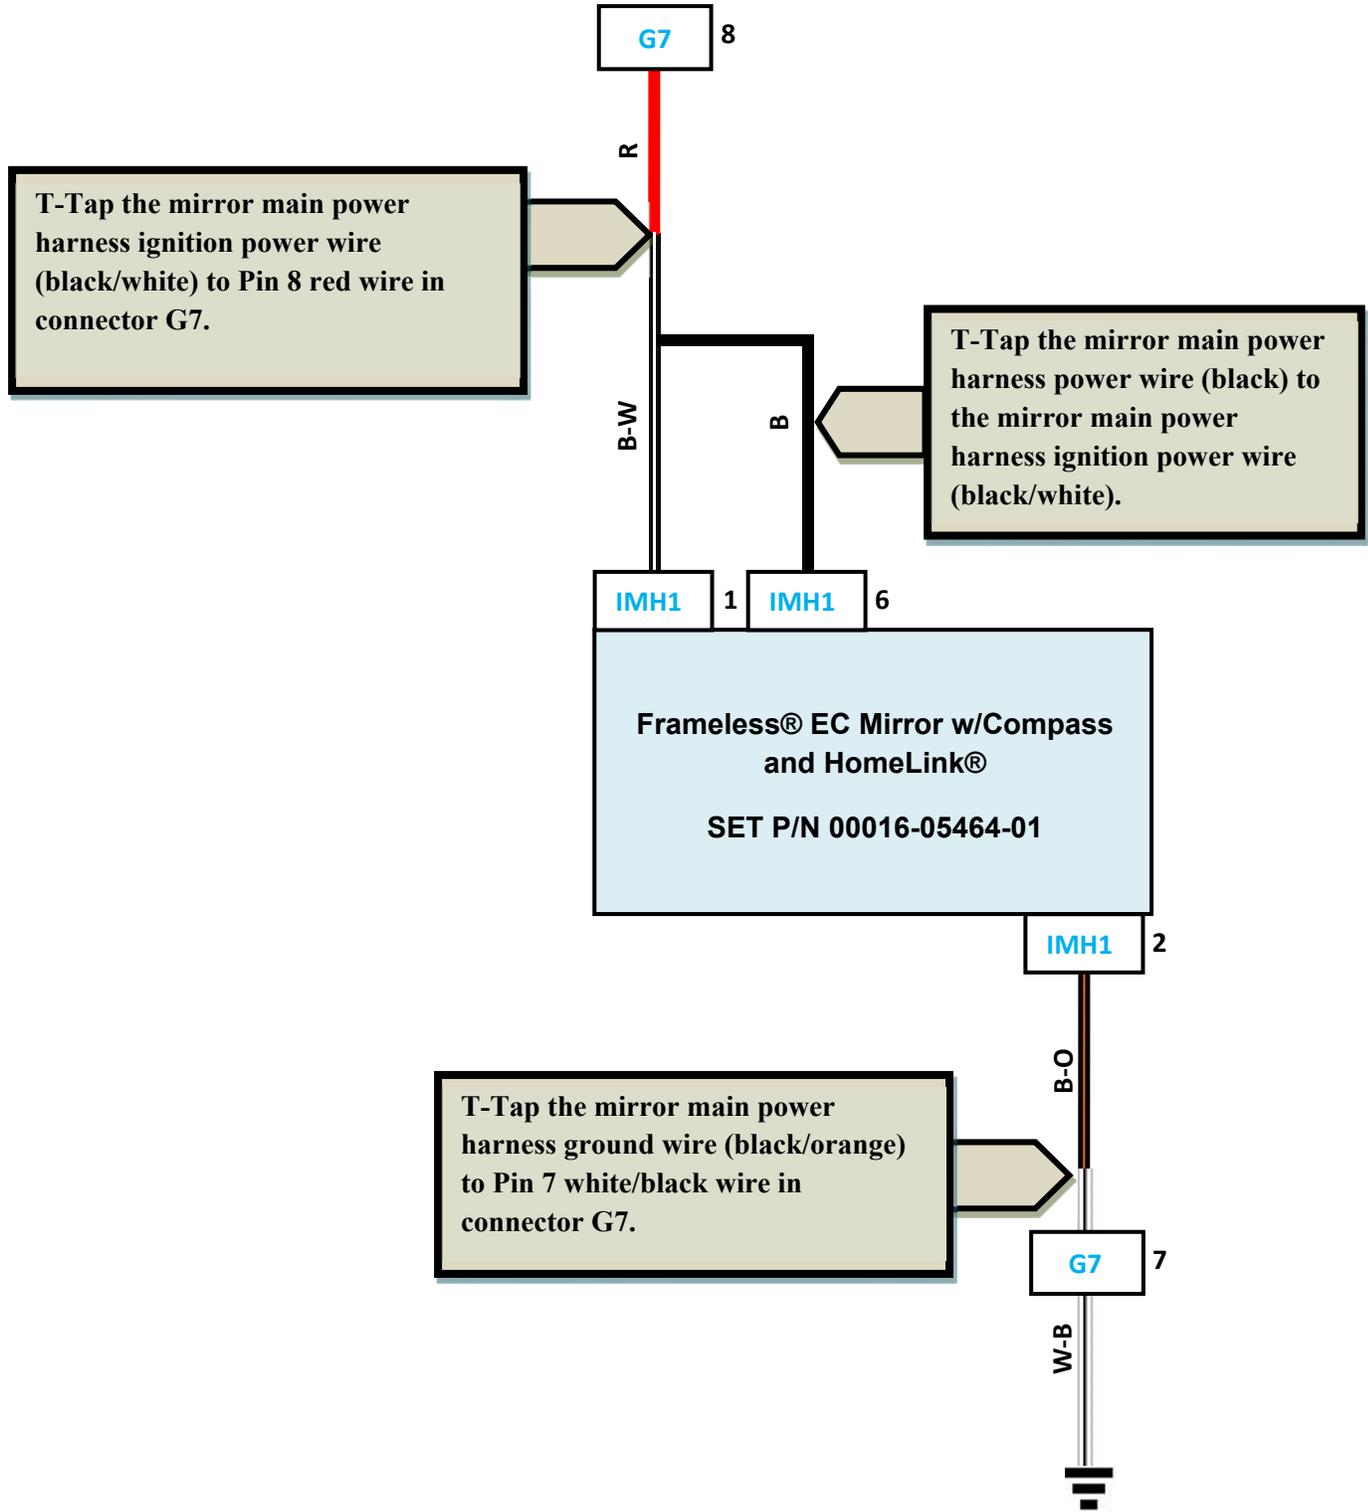

**Checking the Harness Pin outs:**

**Connector IMH1: Frameless® EC Mirror w/Compass Power Harness Connector**




**Connector view is from the front (pin side)**

**If feedback from the harness on any of the pins does not match the results shown in the Proper Operation field below, check the connection to the vehicle wiring and re-test.**

Pin	Wire Color	Test Reference	Proper Operation
1	Black w/White Trace	Pin 1 to ground	Approx. 12 VDC with switch in ON position Approx. 0 VDC with switch in OFF position
2	Black w/Orange Trace	Pin 2 to ground	Always Continuity
6	Black	Pin 3 to ground	Approx. 12 VDC with switch in ON position Approx. 0 VDC with switch in OFF position

Pin	Wire Color	Circuit
1	Black w/White Trace	Ignition
2	Black w/Orange Trace	Ground
6	Black	Battery

### Vehicle Connector G7 Power Circuit / Ground Circuit

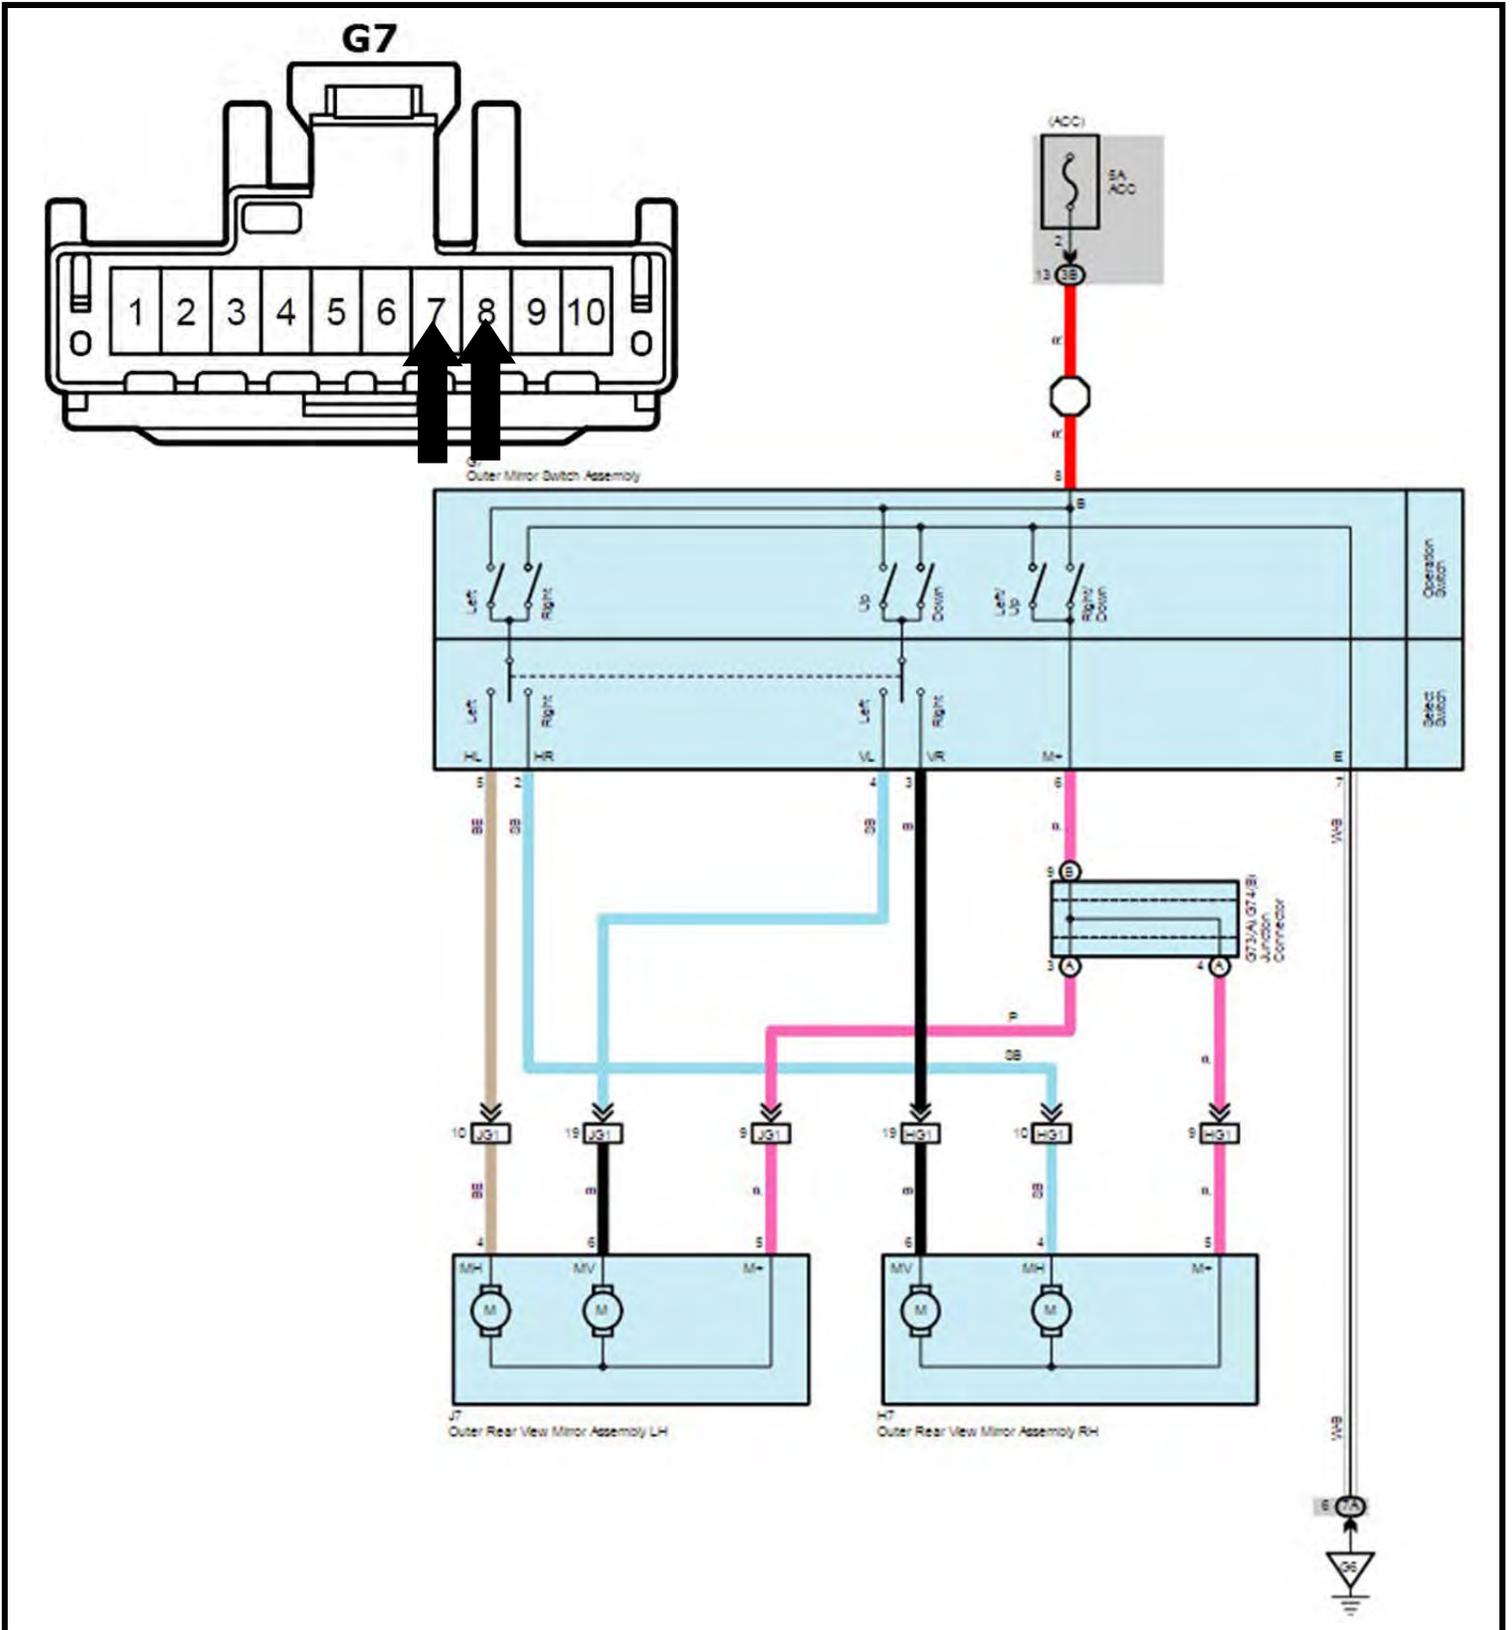



## LIMITED WARRANTY – SOUTHEAST TOYOTA

SOUTHEAST TOYOTA DISTRIBUTORS, LLC (“we,” “our” and “us”) provides the following limited warranty on our accessories, excluding tires, (“Accessories” or “Accessory”) installed on a Toyota. This limited warranty is not provided by and does not bind or provide benefit to the vehicle dealer, the manufacturer, or Toyota Motor Sales, U.S.A., Inc. This limited warranty does not apply to tires; please consult the tire manufacturer and/or its materials accompanying the vehicle for any warranty terms concerning tires. This limited warranty also does not apply to ToyoGuard Exterior Paint Sealant and ToyoGuard Interior Protector; please consult the ToyoGuard Limited Warranty Certificate for the warranty terms concerning those products.

### SCOPE OF LIMITED WARRANTY:

#### A. Protection:

- i. **Accessories Installed by Southeast Toyota Distributors, LLC on a new Toyota vehicle.** We warrant that, for a period of 36 months or 36,000 miles, whichever occurs first, we will repair or replace (includes labor), free of charge, any defect in such an Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. The warranty period begins on the vehicle’s In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator. Accessories installed by Southeast Toyota Distributors, LLC are identified on the vehicle’s window sticker (Monroney Label).
- ii. **Accessories Installed by a Toyota Dealer on a Toyota vehicle.** We warrant that, for 12 months, regardless of mileage, from the date such an Accessory was installed on the vehicle or the remainder of the Toyota new vehicle warranty, whichever is longer, we will repair or replace (includes labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. For a new vehicle, the warranty period begins on the vehicle’s In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator.
- iii. **Accessories purchased from a Toyota Dealer but not installed by the Toyota Dealer.** We warrant that, for a period of 12 months, regardless of mileage, from the date the accessory was purchased, we will repair or replace (does not include labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory.

**B. Limitation of Warranty.** This limited warranty does not apply to, and we will not repair, replace, or reimburse you for: (1) wheel balancing and wheel alignments, except for one wheel balancing or alignment during the first 12 months or 12,000 miles, whichever occurs first, from the vehicle’s In-Service Date, as defined above, (2) abrasions or dents, whatever their cause, and any failure or damage resulting directly or indirectly from accidents, collisions, impacts from foreign objects, fire, theft, larceny, explosion, malicious mischief, vandalism, civil commotion, riots, war, or any other similar causes, (3) any failure or damage resulting directly or indirectly from lightning, windstorms, hail, water, floods, subfreezing temperatures, airborne chemicals, tree sap, dust, salt, and any other environmental conditions or similar causes, (4) any failure or damage caused by: (a) a failure of any part, other than the Accessory, (b) any misuse, abuse, improper towing, negligence or lack of maintenance of the vehicle or Accessory, (c) the alteration, modification or repair of the Accessory by anyone other than persons expressly authorized by us to perform such alteration, modification or repair, or (d) the use of the vehicle for commercial purposes, competitive driving or racing, (5) any failure or damage, if the Accessory has not been installed according to instructions, (6) any failure or damage occurring outside of Canada, the United States of America, its territories or possessions, (7) except to the extent required by the state whose laws govern this limited warranty, any consequential, secondary, or unreasonable costs that may be suffered as a result of the need to repair or replace the Accessory, including without limitation any loss of use of the vehicle, road service, towing, storage charges, inconvenience, loss of wages and/or income, additional expense incurred, loss of transportation, rental car expense, or any derivative damage to persons or things other than the Accessory, including other parts of the vehicle, or (8) liability for damage to property or for injury to or death of any person, arising out of the operation, maintenance or use of your vehicle whether or not related to the covered Accessory.

**C. Exclusive Remedy.** If there is a valid claim under this limited warranty for a defect due to faulty material or workmanship in the Accessory, we will, at our option, either: (i) repair, (ii) replace or (iii) provide a full refund of the purchase price of the Accessory. We have no other obligations under this limited warranty. Refunds will be made to the vehicle owner. If the vehicle is leased, the refund will be made to the leasing company.

**HOW TO MAKE A CLAIM:** In the event of a warranty claim, please contact the nearest Toyota dealer to arrange for repairs. The dealership must receive our prior authorization before making repairs covered by this limited warranty. The dealer will contact Southeast Toyota Distributors, LLC at 1-888-851-2722, select option #5 (Warranty Department), then option #4 (Repairs), for instructions on processing a warranty claim, if they are not already familiar with the process. If you have any questions or concerns regarding repairs covered by this limited warranty, please contact our Customer Assistance Hotline at 1-800-301-6859.

**OUR DISPUTE RESOLUTION PROGRAM:** Your satisfaction is our highest priority. In keeping with that focus, in the event that an issue arises related to this Limited Warranty, we invite you to call our Customer Assistance Hotline at 1-800-301-6859 to discuss it. In most cases, we expect that a satisfactory resolution of your issue can be reached through engagement with that Department. If our Customer Loyalty Department is unable to resolve your issue to your satisfaction, we offer a dispute resolution program administered by the National Center for Dispute Settlement (NCDS) (“the Program”). The purpose of the Program is to resolve disputes in an informal setting before an impartial arbitrator. The Program is free of charge to you (although you must bear the cost of any expert witness or attorney you elect to employ). You are required to complete the Program before exercising rights or seeking remedies under the federal Magnuson-Moss Warranty Act, 15 U.S.C. § 2301 et seq. (“the Act”). If you choose to seek remedies that are not created by the Act, you are not required to use the Program before pursuing such remedies – although the Program is still available to you to resolve the dispute. When utilizing the Program, you will need to provide (a) the vehicle identification number of your vehicle, (b) the identity of your selling and servicing dealerships, (c) the mileage on your vehicle at relevant times, (d) the date and nature of any relevant repairs, (e) legible copies of repair orders and other relevant documents, (f) a summary of the unresolved issue and the requested action, and (g) your contact information. In most cases, the dispute resolution process under the Program will be completed within forty (40) days of your submission of your request and will consist of steps such as an initial eligibility determination, an opportunity for you and us to submit information in writing relating to your claim, an oral hearing, and a decision from the arbitrator. A decision will be binding on you only if you choose to accept it. You may submit a request to NCDS by telephone at their toll free number: (877)-276-8848 or in writing at P.O. Box 463196, Mt. Clemens, MI 48046. You may obtain additional information regarding the Program at [www.ncdsusa.org](http://www.ncdsusa.org). In the event that the NCDS does not exist or no longer handles disputes for us at the time that you seek to submit a request, you may contact our Customer Assistance Hotline at 1-800-301-6859 to obtain current information about our dispute resolution programs.

**GENERAL LIMITATION OF WARRANTY:** THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES OR LIABILITIES. IN NO EVENT SHALL WE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSIONS OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE INFORMATION OR EXCLUSION MAY NOT APPLY. NO EXPRESS WARRANTY OF FITNESS OR MERCHANTABILITY IS GRANTED BY THIS LIMITED WARRANTY. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THOSE DESCRIBED IN THIS DOCUMENT. ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH MAY BE APPLICABLE BY OPERATION OF LAW SHALL BE LIMITED TO THE PERIOD OF THIS WRITTEN LIMITED WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY. THIS LIMITED WARRANTY PROVIDES SPECIFIC LEGAL RIGHTS, AND THERE MAY BE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, MUST BE BROUGHT WITHIN A PERIOD NOT EXCEEDING 12 MONTHS AFTER EXPIRATION OF THIS LIMITED WARRANTY. THE REMEDIES SPECIFIED HEREIN AND THOSE SPECIFIED BY APPLICABLE LAW ARE THE ONLY REMEDIES AVAILABLE. WE ASSUME NO OTHER OBLIGATION OR RESPONSIBILITY WITH REGARD TO THE ACCESSORY. WE NEITHER ASSUME, NOR AUTHORIZE ANYONE TO ASSUME FOR US, ANY ADDITIONAL LIABILITY IN CONNECTION HEREWITH.

**GENERAL:** This limited warranty describes the complete and exclusive rights that result from the purchase of Accessories. No oral representations or statements may be relied upon. This limited warranty may not be amended or modified, and additional rights may not be granted, unless in a written statement signed by one of our officers. This limited warranty shall be governed by the laws of the state where the vehicle is purchased, excluding laws concerning conflicts of law. We may delegate the performance of our duties and obligations and assign our rights and benefits hereunder. For inquiries regarding this limited warranty, we can be contacted directly at **Customer Assistance Hotline at 1-800-301-6859**, or by mail to: **Southeast Toyota Distributors, LLC, Attention: Customer Loyalty Department, 100 Jim Moran Boulevard, Deerfield Beach, Florida 33442.**