Doc. 15.264.00 02/13/18



2018 Tundra Pocket Fender Flares w/Black Rivets

Year & Model:	2018 Tundra
Part Number:	00016-34888
Accessory Code:	BF3200
PIO / DIO:	PIO / DIO
Business Partner:	J82

Conflicts

Note: None

General Applicability

Fits Models: 2018 Tundra Models

Additional Items Required For Installation

Item#	Description:
1.	N/A

Sequence of Application

	* *
Item#	Accessory:
1.	LED Strip or 2-1 Lights
2.	Fender Flares

SPECIALNOTE: Installation Sequences

After TMS & Safety mandated preparatory steps have been taken, the installation sequence is the suggested method for completing the accessory installation. In some instances the suggested sequence is written for one associate to install & in others the sequence is given as part of a team accessory installation. Unless otherwise stated in the document, the associates may perform the installation steps in any order to make the installation as efficient as possible while maintaining consistent quality.

Southeast Toyota Distributors, LLC Accessory Installation Instructions

Recommended Tool

Safety Items	
Safety Glasses	
Installation Tools	
10mm Socket	
10mm Deep Well Socket	Optional for initial hand install
Driver for Socket	
Special Chemicals	
VDC Approved Cleaner	
50/50 Soap / Water	

Legend



STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.



OPERATOR SAFETY: Use caution to avoid risk of injury.




<u>CAUTION:</u> A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.



TOOLS & EQUIPMENT: Used in Figures calls out the specific tools and equipment recommended for this process.



REVISION MARK: This mark highlights a change in installation with respect to previous issue.



TOYOTA TUNDRA

Pocket Fender Flares w/Black Rivets

Table of Contents

I.	Preparation1-6
a.)	Table of Contents2
b.)) Kit/Hardware Bag Contents
c.)	Parts for Installation4
d.)	Color Applicability / Trim Level5
e.)	Service & Warranty Information6
b.)	Procedures Preparation
III.	Accessory Function Check
IV.	Blank Page12
V.	Warranty Statement

Pocket Fender Flares w/ Black Rivets

Kit/Hardware Bag Contents:

Item#	Quantity	Description		
1.	1	Left Front Fender Flare		
2.	1	Right Front Fender Flare		
3.	1	Left Rear Fender Flare		
4.	1	Right Rear Fender Flare		
5.	1	Hardware Kit		
6.	6	Mounting Clip "X"		
7.	34	10mm Hex Head Screws		

Parts for Installation:

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation. These guidelines can be found in the "Accessory Installation Practices" document.

This document covers such items as:

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, re-checking torque procedure, etc.).
- Vehicle Disassembly/ Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Item#	Quantity	Description		
1.	1	Left Front Fender Flare		
2.	1	Right Front Fender Flare		
3.	1	Left Rear Fender Flare		
4.	1	Right Rear Fender Flare		



Note: Only to be used as an example for Black Pocket Fender Flares

Color Applicability / Trim Level

Part Numbers	Vehicle Trim Color
00016-34888-01	1D6-Silver Sky Metallic
00016-34888-31	1H5 Cement
00016-34888-10	040-Super White
00016-34888-11	1G3-Magnetic Gray Metallic
00016-34888-12	218-Midnight Black Metallic


Service & Warranty Information:

	Parts information		Warranty Information	
Image Key	Part Number	Description	Warranty Time	Labor Op. Code
A	00016-34178-54	Fender Flare Edge Trim	0.5	APF021
В	00016-34888-50	Left Front Fender Flare	0.5	APF011
N/A	00016-34888-51	Right Front Fender Flare	0.5	APF011
N/A	00016-34888-52	Left Rear Fender Flare	0.5	APF011
N/A	00016-34888-53	Right Rear Fender Flare	0.5	APF011
С	00016-34888-55	Black Studs, 10 Pack	0.2	APF031

Note: Combo Code A, AA, or AAA applicable to APF011 and APF021 for additional 0.3 hours per flare replaced. Combo Code A, AA, or AAA applicable to APF031 for additional 0.1 per 5 rivets replaced.

If you are a dealer located outside of the Southeast Region, please contact the SET Accessory Warranty Department at (888) 851-2722 or email Accessory.Warranty@SEToyota.com for claim payment instructions.

Image:

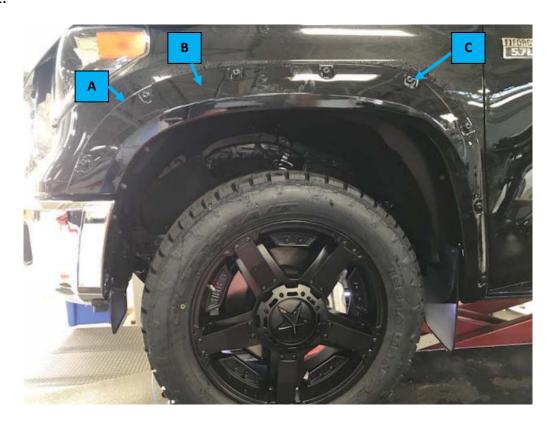

Pocket Fender Flares w/ Black Rivets

Preparation:

- 1. Verify that the part is for the correct vehicle model and that it fits the vehicle properly.
- 2. Inspect the vehicle for damage prior to installing the Fender Flares.
- 3. Paint: Prepare part surfaces per Toyota paint standards. Do not use lacquer thinner.

Front Fender Flare Installation:

1. Clean the vehicle body areas with a 50/50 soap and water solution or VDC approved cleaner to remove any dirt and debris where the Fender Flare will make contact with fender. Re-apply a light misting of 50/50 soap and water solution to aid in gasket installation. Figure 1.



Fig. 1



Fig. 2a



Completely remove protective film from outside surface of fender flare. (when applicable).



Hold Fender Flare towards vehicle in the position of best fit. Note where slots in product wheel arch area correspond to existing 10mm hex screws in mudguard and front fascia panel. Remove these (4) screws from the vehicle and discard. Figures 2a, 2b & 2c.



Fig. 2b



Fig. 2c

Pocket Fender Flares w/ Black Rivets



Fig. 3



Obtain (3) Mounting Clip "X" and (8) 10mm Hex Head Screws from hardware kit. Use either (L) or (R) front flare to begin install.

Inspect gasket conformity to Fender Flare prior to Installation. Rub gasket if needed, to ensure it is not rolled away from edge.

While pulling mud guard away from vehicle in forward / outward direction. Figure 3. Carefully slide the flare between the fender and mud guard so their shapes interlock. Ensure inner fender liner does not interfere with flare during installation.



Fig. 4



Re-inspect gasket to ensure no areas are "rolled under" prior to Installation.

Using the provided 10mm Hex Head
Screws, loosely install using optional
10mm deep well socket, beginning with
marked "A" location, then to the (2)
locations in the front fascia. Figure 4.



Fig. 5c



Using Clip "X", engage the clip into the foremost available slot in the top wheel arch area of the Flare and completely secure using a 10mm Hex Head Screw. (Fig 5a). Install from front to rear of vehicle in these (3) locations ensuring that pressure is applied to the Fender Flare to keep it high and tight on the fender. Figures 5a, 5b, & 5c.



Fig. 6

If necessary, apply additional 50/50 soap and water solution for minor adjustments to the flares position and to ensure rubber gasket is flat against the vehicle surface. When satisfied completely secure the Install (3) Hex Head Screws, using the remaining (2) Hex Head screws, secure the



mudguard into the corresponding slots in the Fender Flare. Figure 6.



Fig. 7

Rear Fender Flare Installation:

Clean the vehicle body areas with a 50/50 soap and water solution or VDC approved cleaner to remove any dirt and debris where the Fender Flare will make contact with fender. Re-apply a light misting of 50/50 soap and water solution to aid in gasket installation. Figure 7.



Fig. 8a

Fig. 8b

2.



Completely remove protective film from outside surface of fender flare. (when applicable).



(a) Remove (3) exterior existing screws from mud guard and discard. Figure 8a.



(b) Loosen (2) interior / lowest existing screws in mud guard approximately half way. Figure 8b.



Fig. 9

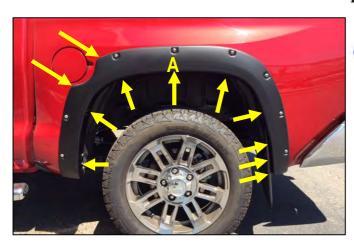


Fig. 10



Fig. 11

3. Obtain (9) 10mm Hex Head Screws from hardware kit. Use corresponding rear flare to previously installed front flare.



Inspect gasket conformity to Fender Flare prior to Installation. Rub gasket if needed, to ensure it is not rolled away from edge. While pulling the mud guard away from the vehicle in a forward and outward direction (identical to front flare), carefully slide the flare between the fender and mud guard so their shapes interlock. Ensure inner fender liner does not interfere with flare during installation. Figure 9.



Re-inspect gasket to ensure no areas are "rolled under" prior to Installation. Pay special attention to gas cap door area.



Using the provided 10mm Hex Head Screws, loosely install using optional 10mm deep well socket, beginning with marked "A" location, then all slots forward of "A" and then all rear of "A" including the (3) for the mudguard. Figure 10.

- 5. If necessary, apply additional 50/50 soap and water solution to ensure rubber gasket is flat against vehicle. When satisfied completely secure the (9) Hex Head Screws installed in Step 10 starting at front and working to rear of the vehicle. Retighten (2) mudguard screws in Step 8b.

 Repeat above steps on opposite side of vehicle to complete installation. Figure 11.
- 6. Print Warranty Statement & place in glove box, DIO only.

TOYOTA TUNDRA

Pocket Fender Flares w/ Black Rivets

Accessory Function Checks:

Check:	Look For:
--------	-----------

✓ Check Rubber Molding Look for uniform fit to vehicle with no

gaps larger than 1mm.

Check Fender Flare fit Look for no overlapping of part over door edge

or gas cap door finger groove.

Check Mud Guard fit / integration Look for all screws correctly installed and mud

guards securely back in place.

Check Product / Paint finish Look for NO damage, dirt or finger / scuff

marks.

Check for Gasket seating / rolling Look for gasket to be flat against vehicle

Rolled under sections are NOT acceptable.

Warranty Statement Place Warranty Statement in glove box, DIO Only.



LIMITED WARRANTY - SOUTHEAST TOYOTA

SOUTHEAST TOYOTA DISTRIBUTORS, LLC ("we," "our" and "us") provides the following limited warranty on our accessories, excluding tires, ("Accessories" or "Accessory") installed on a Toyota. This limited warranty is not provided by and does not bind or provide benefit to the vehicle dealer, the manufacturer, or Toyota Motor Sales, U.S.A., Inc. This limited warranty does not apply to tires; please consult the tire manufacturer and/or its materials accompanying the vehicle for any warranty terms concerning tires. This limited warranty also does not apply to ToyoGuard Exterior Paint Sealant and ToyoGuard Interior Protector; please consult the ToyoGuard Limited Warranty Certificate for the warranty terms concerning those products.

SCOPE OF LIMITED WARRANTY:

A. Protection:

- i. Accessories Installed by Southeast Toyota Distributors, LLC on a new Toyota vehicle. We warrant that, for a period of 36 months or 36,000 miles, whichever occurs first, we will repair or replace (includes labor), free of charge, any defect in such an Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. The warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator. Accessories installed by Southeast Toyota Distributors, LLC are identified on the vehicle's window sticker (Monroney Label).
- ii. Accessories Installed by a Toyota Dealer on a Toyota vehicle. We warrant that, for 12 months, regardless of mileage, from the date such an Accessory was installed on the vehicle or the remainder of the Toyota new vehicle warranty, whichever is longer, we will repair or replace (includes labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory. For a new vehicle, the warranty period begins on the vehicle's In-Service Date, which is the first date the new vehicle is either delivered to an ultimate purchaser, leased, or used as a company car or demonstrator.
- iii. Accessories purchased from a Toyota Dealer but not installed by the Toyota Dealer. We warrant that, for a period of 12 months, regardless of mileage, from the date the accessory was purchased, we will repair or replace (does not include labor), free of charge, any defect in the Accessory due to faulty material or workmanship, or, at our option, provide a full refund of the purchase price of the Accessory.
- B. Limitation of Warranty. This limited warranty does not apply to, and we will not repair, replace, or reimburse you for: (1) wheel balancing and wheel alignments, except for one wheel balancing or alignment during the first 12 months or 12,000 miles, whichever occurs first, from the vehicle's In-Service Date, as defined above, (2) abrasions or dents, whatever their cause, and any failure or damage resulting directly or indirectly from accidents, collisions, impacts from foreign objects, fire, theft, larceny, explosion, malicious mischief, vandalism, civil commotion, riots, war, or any other similar causes, (3) any failure or damage resulting directly or indirectly from lightning, windstorms, hail, water, floods, subfreezing temperatures, airborne chemicals, tree sap, dust, salt, and any other environmental conditions or similar causes, (4) any failure or damage caused by: (a) a failure of any part, other than the Accessory, (b) any misuse, abuse, improper towing, negligence or lack of maintenance of the vehicle or Accessory, (c) the alteration, modification or repair of the Accessory by anyone other than persons expressly authorized by us to perform such alteration, modification or repair, or (d) the use of the vehicle for commercial purposes, competitive driving or racing, (5) any failure or damage, if the Accessory has not been installed according to instructions, (6) any failure or damage occurring outside of Canada, the United States of America, its territories or possessions, (7) except to the extent required by the state whose laws govern this limited warranty, any consequential, secondary, or unreasonable costs that may be suffered as a result of the need to repair or replace the Accessory, including without limitation any loss of use of the vehicle, road service, towing, storage charges, inconvenience, loss of wages and/or income, additional expense incurred, loss of transportation, rental car expense, or any derivative damage to persons or things other than the Accessory, including other parts of the
- C. Exclusive Remedy. If there is a valid claim under this limited warranty for a defect due to faulty material or workmanship in the Accessory, we will, at our option, either: (i) repair, (ii) replace or (iii) provide a full refund of the purchase price of the Accessory. We have no other obligations under this limited warranty. Refunds will be made to the vehicle owner. If the vehicle is leased, the refund will be made to the leasing company.

HOW TO MAKE A CLAIM: In the event of a warranty claim, please contact the nearest Toyota dealer to arrange for repairs. The dealership must receive our prior authorization before making repairs covered by this limited warranty. The dealer will contact Southeast Toyota Distributors, LLC at 1-888-851-2722, select option #5 (Warranty Department), then option #4 (Repairs), for instructions on processing a warranty claim, if they are not already familiar with the process. If you have any questions or concerns regarding repairs covered by this limited warranty, please contact our Customer Assistance Hotline at 1-800-301-6859.

OUR DISPUTE RESOLUTION PROGRAM: Your satisfaction is our highest priority. In keeping with that focus, in the event that an issue arises related to this Limited Warranty, we invite you to call our Customer Assistance Hotline at 1-800-301-6859 to discuss it. In most cases, we expect that a satisfactory resolution of your issue can be reached through engagement with that Department. If our Customer Loyalty Department is unable to resolve your issue to your satisfaction, we offer a dispute resolution program administered by the National Center for Dispute Settlement (NCDS) ("the Program"). The purpose of the Program is to resolve disputes in an informal setting before an impartial arbitrator. The Program is free of charge to you (although you must bear the cost of any expert witness or attorney you elect to employ). You are required to complete the Program before exercising rights or seeking remedies under the federal Magnuson-Moss Warranty Act, 15 U.S.C. § 2301 et seq. ("the Act"). If you choose to seek remedies that are not created by the Act, you are not required to use the Program before pursuing such remedies - although the Program is still available to you to resolve the dispute. When utilizing the Program, you will need to provide (a) the vehicle identification number of your vehicle, (b) the identity of your selling and servicing dealerships, (c) the mileage on your vehicle at relevant times, (d) the date and nature of any relevant repairs, (e) legible copies of repair orders and other relevant documents, (f) a summary of the unresolved issue and the requested action, and (g) your contact information. In most cases, the dispute resolution process under the Program will be completed within forty (40) days of your submission of your request and will consist of steps such as an initial eligibility determination, an opportunity for you and us to submit information in writing relating to your claim, an oral hearing, and a decision from the arbitrator. A decision will be binding on you only if you choose to accept it. You may submit a request to NCDS by telephone at their toll free number: (877)-276-8848 or in writing at P.O. Box 463196, Mt. Clemens, MI 48046. You may obtain additional information regarding the Program at www.ncdsusa.org. In the event that the NCDS does not exist or no longer handles disputes for us at the time that you seek to submit a request, you may contact our Customer Assistance Hotline at 1-800-301-6859 to obtain current information about our dispute resolution programs.

GENERAL LIMITATION OF WARRANTY: THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER EXPRESS WARRANTIES OR LIABILITIES. IN NO EVENT SHALL WE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSIONS OR LIMITATIONS OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE INFORMATION OR EXCLUSION MAY NOT APPLY. NO EXPRESS WARRANTY OF FITNESS OR MERCHANTABILITY IS GRANTED BY THIS LIMITED WARRANTY. THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THOSE DESCRIBED IN THIS DOCUMENT. ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WHICH MAY BE APPLICABLE BY OPERATION OF LAW SHALL BE LIMITED TO THE PERIOD OF THIS WRITTEN LIMITED WARRANTY. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY. THIS LIMITED WARRANTY PROVIDES SPECIFIC LEGAL RIGHTS, AND THERE MAY BE OTHER RIGHTS WHICH VARY FROM STATE TO STATE. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, MUST BE BROUGHT WITH IN A PERIOD NOT EXCEEDING 12 MONTHS AFTER EXPIRATION OF THIS LIMITED WARRANTY. THE REMEDIES SPECIFIED HEREIN AND THOSE SPECIFIED BY APPLICABLE LAW ARE THE ONLY REMEDIES AVAILABLE. WE ASSUME NO OTHER OBLIGATION OR RESPONSIBILITY WITH REGARD TO THE ACCESSORY. WE NEITHER ASSUME, NOR AUTHORIZE ANYONE TO ASSUME FOR US, ANY ADDITIONAL LIABILITY IN CONNECTION HEREWITH.

GENERAL: This limited warranty describes the complete and exclusive rights that result from the purchase of Accessories. No oral representations or statements may be relied upon. This limited warranty may not be amended or modified, and additional rights may not be granted, unless in a written statement signed by one of our officers. This limited warranty shall be governed by the laws of the state where the vehicle is purchased, excluding laws concerning conflicts of law. We may delegate the performance of our duties and obligations and assign our rights and benefits hereunder. For inquiries regarding this limited warranty, we can be contacted directly at Customer Assistance Hotline at 1-800-301-6859, or by mail to: Southeast Toyota Distributors, LLC, Attention: Customer Loyalty Department, 100 Jim Moran Boulevard, Deerfield Beach, Florida 33442.