

Part Number: PT218-12022**Kit Contents**

Item #	Quantity Req'd.	Description
1	1	Hood Piece
2	2	Side Panel
3	1	Installation Instructions
4	1	Hardware Bag

Hardware Bag Contents

Item #	Quantity Req'd.	Description
1	2	Snap/screw
2	2	Washer
3	2	Spring Clip

Additional Items Required For Installation

Item #	Quantity Req'd.	Description

Conflicts

Note:

Recommended Tools

Safety Tools	
Vehicle Protection	Blanket or plastic sheet
Special Tools	
None	
Installation Tools	
Phillips Head Screwdriver	
Flat Head Screwdriver	
Special Chemicals	
None	

General Applicability






This Mask can be fitted to all Corolla models from 2003 onwards.

Recommended Sequence of Application

Item #	Accessory	
1		
2		
3		

*Mandatory

Legend

	STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.
	OPERATOR SAFETY: Use caution to avoid risk of injury
	CRITICAL PROCESS: Proceed with caution to ensure a quality installation.
	GENERAL PROCESS: This highlights specific processes to ensure a quality installation.
	TOOLS & EQUIPMENT: This calls out the specific tools and equipment required for this process

For technical assistance regarding this Toyota product, please call: 1-800-347-1200.

Engineered by Toyota to meet cooling requirements. Please follow these installations instructions in the order they are written. It will make installing your custom made mask much easier. Your mask was designed to have a tight fit, and when fully installed it will be snug. Don't be afraid to tug.

A. Protect the Vehicle**1. Customer Care Information:**

NOTE: Important, please observe the following precautions, the manufacturer cannot be responsible for damage to paint.

- i. Area to be covered by mask must be free of dirt. The mask, especially the flannel surface, must be clean.
- ii. Both car and mask must be completely dry. If moisture is present under mask, and is allowed to dry on the vehicle, it may cause the paint to cloud. If mask gets wet, remove and allow to dry completely before reinstalling.
- iii. To clean vinyl and flannel backing use a mild soap and water solution. (Approx. one tablespoon of soap per half gallon of water.) Using a cloth or sponge, gently rub soiled area until clean. Take care to rinse with clear water when finished. Repeat if necessary. Hang out to dry, but not in direct sunlight.
- iv. It is recommended that the mask be removed before washing the vehicle.
- v. If mask should flap due to high speed or wind conditions, stop car and adjust or remove the mask.

2. Pre-installation Tip:

- i. Remove mask from package and familiarize yourself with its shape in relation to the contours of the vehicle.

NOTE: Mask will be easier to install if it is warmed (to room temperature) before installation.

B. Hardware Installation

NOTE: Turning the wheels eases the next operation.

- ➡ 1. Remove the plastic fastener already installed in vehicle wheel well area (Fig. B-1.)
2. Pull back the plastic fender liner and install the spring clip over the fender tab, aligning the hole in the clip with the hole in the tab.
3. Relocate the fender liner over the spring clip.
- ➡ 4. Install the snap/screw, and washer into the spring clip. (Fig. B-2.)
5. Repeat steps (B.1. ☐ B.2.) on opposite side of vehicle.

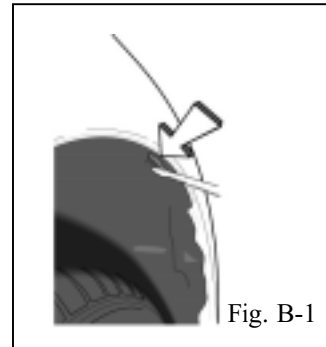


Fig. B-1

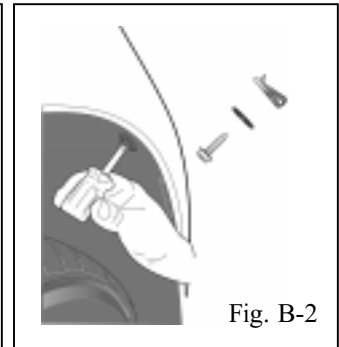


Fig. B-2

C. Hood Piece Installation

- ➡ 1. Open hood to install hood piece.
- ➡ 2. Attach two (2) elastic straps with ☐ hook to holes at sides at bottom of hood (Fig. C-1.) At the top of the hood pull two (2) elastic loops with ☐ hook through the grill and attach to each hole on each side of the hood latch area. At the side of the grill attach one (1) elastic with ☐ hook to the edge on each side. In between the side grill hook and the long strap to the bottom hole, attach one (1) ☐ hook to the hole next to the rubber strip
3. Repeat step (C.2.) on other side.

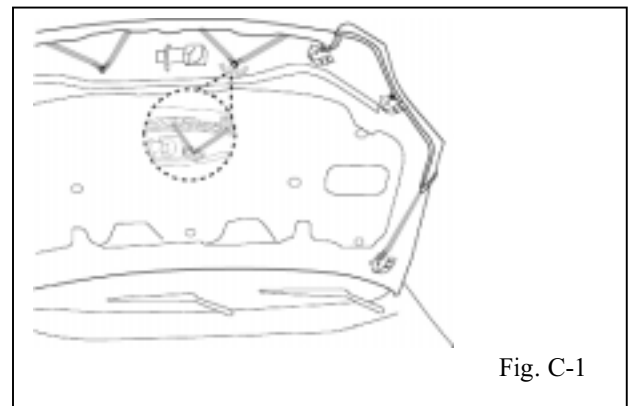


Fig. C-1

+ **IMPORTANT:** Pull the elastic strap toward you **NEVER** away from you.

D. Fender Bumper Piece Installation

- ➡ 1. Place fender pocket of mask over fender point above headlight (Fig. D-1.) Attach plastic clip to edge of fender flange.
- ➡ 2. Attach one (1) snap on side panel to top of wheel well (Fig. D-2.) Insert plastic flap in between bumper top and fender.

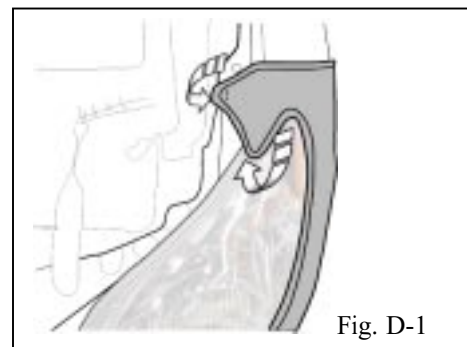


Fig. D-1

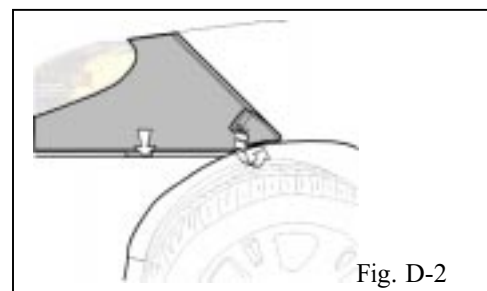




Fig. D-2

Section II ☐ Installation Procedure

- ➡ 3. Take the elastic strap from the side panel and route it underneath the headlight (Fig. D-3.)
4. Repeat steps (D.1. ☐ D.3.) on other side of vehicle.
- ➡ 5. Pull each elastic strap behind the headlight and attach to either one of the two holes (Fig. D-4.)
6. Close the hood.

E. Installation Instructions

1. Place installation instructions in glove box for future reference.

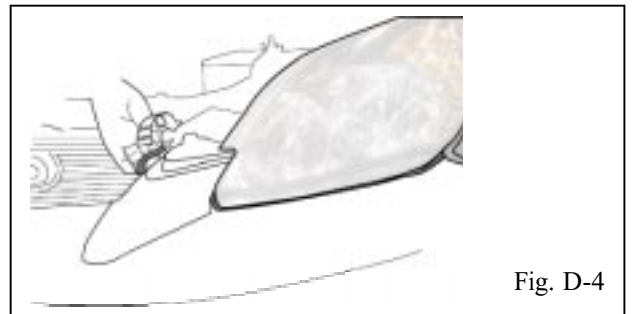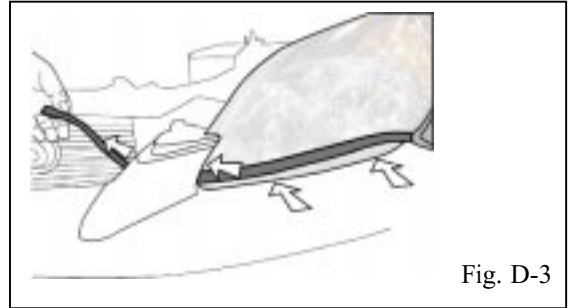



Section III Ⅲ Functional Verifications

Check: _____

- ☐ Correct part number has been installed.
- ☐ Vehicle and mask are free of dirt.
- ☐ Vehicle and mask are dry.
- ☐ Mask is properly adjusted.
- ☐ Mask has proper fit.

Look For: _____

Verify part number on package.

Verify that there are no smudges or dirt particles.

Verify that any area that may have been wet is completely dry.

Verify that headlights, markers, turn signals, cooling intakes and ducts are unobstructed.

Verify that there is no flapping and the mask fits tightly.