

Part Number: PT938-89100, PT938-89200

Kit Contents

Item #	Quantity Req'd.	Description
1	1	LHS Board Assembly
2	1	RHS Board Assembly

Hardware Bag Contents

Item #	Quantity Req'd.	Description
1	12	M8 x 25 Serrated Flange Screw
2	1	Instruction Sheet

Additional Items Required For Installation

Item #	Quantity Req'd.	Description

Conflicts

Non-Trail Edition models

Recommended Tools

Personal & Vehicle Protection	Notes
None	
Special Tools	Notes
None	
Installation Tools	Notes
Ratchet	3/8"
Sockets	12 mm, 13 mm
Extension	3/8" - 3"
Torque Wrench	3/8" Drive (25 lbf-ft)
Special Chemicals	Notes
None	

General Applicability

MY11 and newer 4Runner (Trail Edition) models

Recommended Sequence of Application

Item #	Accessory
1	
2	
3	

*Mandatory

Vehicle Service Parts (may be required for reassembly)

Item #	Quantity Req'd.	Description
1		
2		
3		

Legend



STOP: Damage to the vehicle may occur. Do not proceed until process has been complied with.



OPERATOR SAFETY: Use caution to avoid risk of injury.



CAUTION: A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.



TOOLS & EQUIPMENT: Used in Figures calls out the specific tools and equipment recommended for this process.



REVISION MARK: This mark highlights a change in installation with respect to previous issue.



SAFETY TORQUE: This mark indicates that torque is related to safety.



REGULATORY MARK: This mark indicates the component is related to regulatory compliance



(Limited shown)

Procedure


Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.

This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Please see your Toyota dealer for a copy of this document.

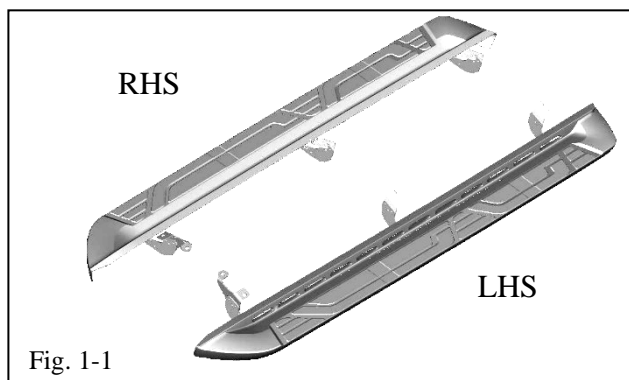


1. Remove the Running Board From the Packaging.

- (a) Remove left and right running board assemblies and a hardware bag from package and place on a clean protected work surface. Verify kit contents and inspect the running board for damage (Fig. 1-1).



2. Prepare the Running Board (LH/RH side)

- (a) Verify hardware bag content by referring to the cover page of this instruction sheet.
- (b) Using a 12mm socket, remove & discard twelve (12) OEM Hex bolts from all bracket positions (3 brackets per side) underneath the vehicle (6 bolts from each side).
- (c) Locate the center upper position 8mm factory-threaded nut. Install one bolt and hand fasten about 5 turns into the nut (Fig. 2-1).

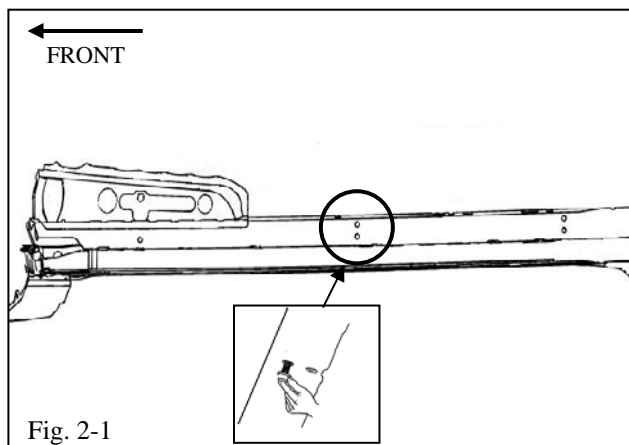


3. Install the Running Board (RH Side).

- (a) Lift the right side running board assembly into position (Fig. 3-1).

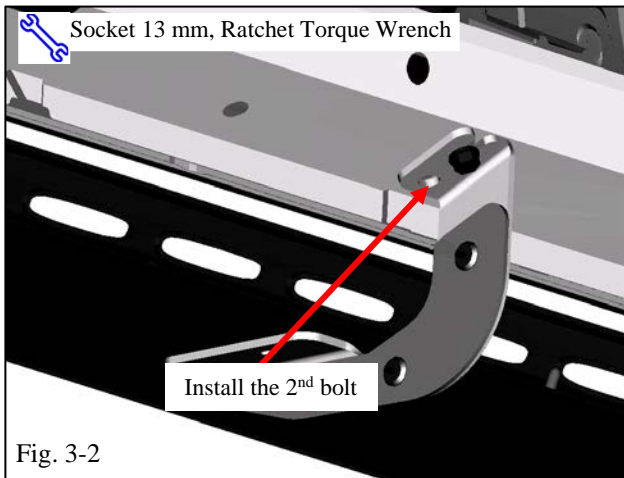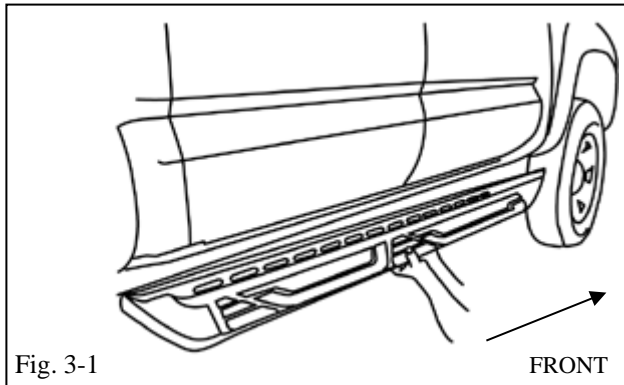

- (b) Engage slot of center bracket under head of bolt to secure position (Fig. 3-2). Support with hand while installing the second bolt a minimum of 5 turns.

-  (c) Align the bracket holes to the factory holes and install other M8 bolts at remaining locations to secure brackets. Hand Tighten all hardware. Torque all six bolts to 19.5 N·m (14.4 ft·lbf).

Torque: 19.5 N·m (14.4 ft·lbf)

4. Install the Running Board (LH Side).

- (a) Repeat step 3(a) to 3(c) for left hand side.

Checklist - these points **MUST** be checked to ensure a quality installation.

Check:	Look For:
<p><u>Accessory Function Checks</u></p> <p><input type="checkbox"/> Visual check of running board</p>	<p>Ensure Running Board is level and parallel to vehicle rocker.</p>
<p><u>Vehicle Appearance Check</u></p> <p><input type="checkbox"/> After accessory installation and removal of protective cover(s), perform a visual inspection.</p>	<p>Ensure no damage (including scuffs and scratches) was caused during the installation process.</p> <p>(For PPO installations, refer to TMNA Accessory Quality Shipping Standard.)</p>