

**Part Number: PTR57-34140**

**Kit Contents**

Item #	Quantity Reqd.	Description
1	1	Shift Knob
2		
3		
4		
5		

**Hardware Bag Contents**

Item #	Quantity Reqd.	Description
1		None
2		
3		

**Additional Items Required For Installation**

Item #	Quantity Reqd.	Description
1		None
2		
3		

**Conflicts**

--

**Recommended Tools**

<b>Personal &amp; Vehicle Protection</b>	<b>Notes</b>
Working gloves	
<b>Special Tools</b>	<b>Notes</b>
None	
<b>Installation Tools</b>	<b>Notes</b>
<b>Special Chemicals</b>	<b>Notes</b>
None	

**General Applicability**

Tundra A/T only
-----------------

**Recommended Sequence of Application**







Item #	Accessory
1	
2	
3	

\*Mandatory

**Vehicle Service Parts** (may be required for reassembly)

Item #	Quantity Reqd.	Description
1		
2		
3		

**Legend**

	<b>STOP:</b> Damage to the vehicle may occur. Do not proceed until process has been complied with.
	<b>OPERATOR SAFETY:</b> Use caution to avoid risk of injury.
	<b>CAUTION:</b> A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.
	<b>TOOLS &amp; EQUIPMENT:</b> Used in Figures calls out the specific tools and equipment recommended for this process.
	<b>REVISION MARK:</b> This mark highlights a change in installation with respect to previous issue.
	<b>SAFETY TORQUE:</b> This mark indicates that torque is related to safety.

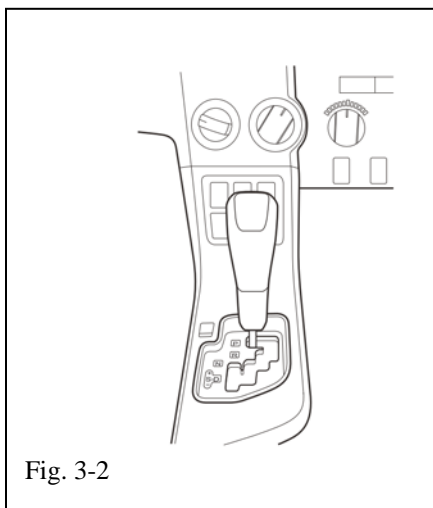
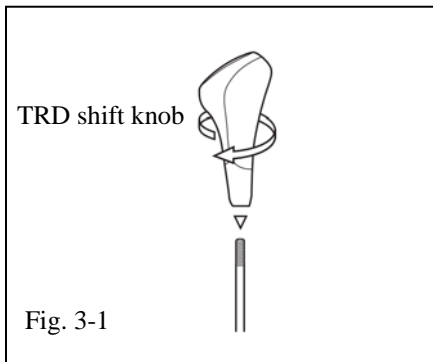
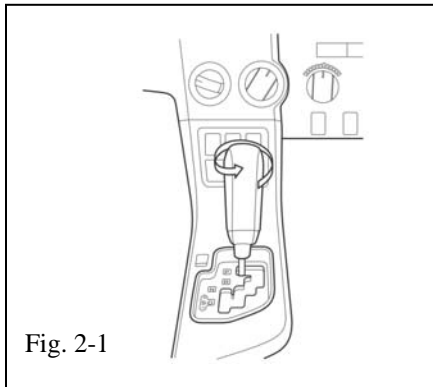
Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.



This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Please see your Toyota dealer for a copy of this document.



### 1. Pre-Installation Precautions


-  (a) Park vehicle on a flat surface. Position the gear lever in P.
-  (b) Engage Parking Brake.


### 2. Remove OE Shift Knob

- (a) Turn the OE shift knob counter-clockwise to loosen, then remove and discard. (Fig. 2-1)


### 3. Install TRD Shift Knob

- (a) Lower TRD Shift Knob onto shaft, apply downward pressure and turn clockwise about 15 times until snug. (Fig. 3-1)


 **NOTE:** DO NOT over-tighten! Damage to Inner Sleeve may occur.

 **NOTE:** Be careful when turning shift knob to avoid mis-threading.

- (b) Adjust TRD Shift Knob so the logo on top of knob is aligned with the front seats.(Fig. 3-2)

 **NOTE:** The shift knob can become extremely hot when the vehicle is parked under direct sunlight. Please be mindful of this and take necessary precautions.

Checklist - these points **MUST** be checked to ensure a quality installation.

Check:	Look For:
<u>Accessory Function Checks</u>	
<u>Vehicle Function Checks</u>  <input type="checkbox"/> Sport Shift Knob to Shaft	<ul style="list-style-type: none"> <li>• Shift knob is securely installed with no vertical or rotational movement.</li> <li>• Shift knob allows full range of motion through all gears.</li> </ul>
<u>Vehicle Appearance Check</u> <input type="checkbox"/> After accessory installation and removal of protective cover(s), perform a visual inspection.	<p>Ensure no damage (including scuffs and scratches) was caused during the installation process.          (For PPO installations, refer to TMS Accessory Quality Shipping Standard.)</p>